

F.A.U. BOUTE NO. BHEET NC. TOTAL 563 367 2552 DUPAGE FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT

• 00-00114-00-PV CONTRACT NO. 63024

SHEET NO. - 3


8 - SHEETS

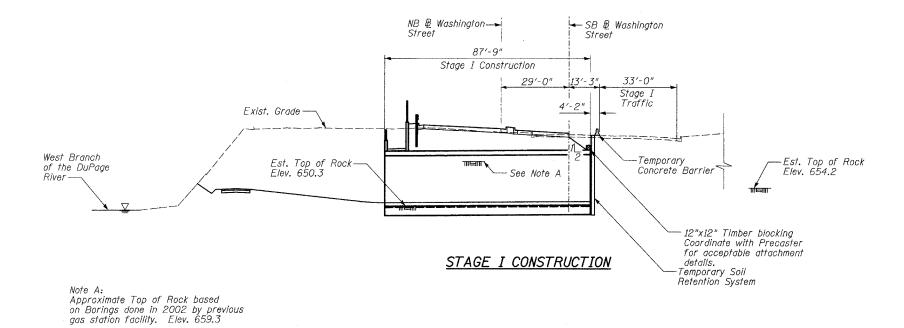

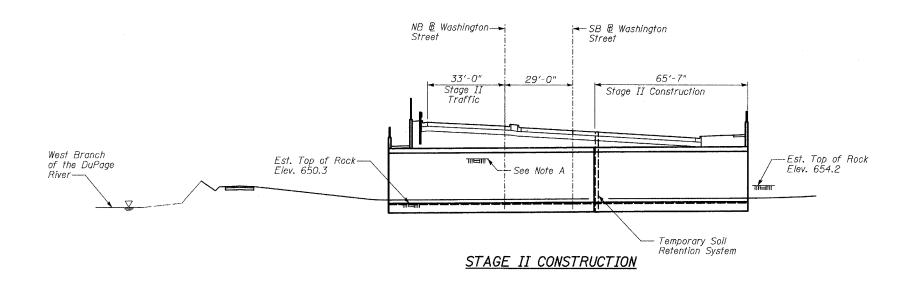

TYLININTERNATIONAL

DESIGNED	_	SP		 _
CHECKED	-	SP	PF	
DRAWN	-	SP		
CHECKED	-	SP		
				 _

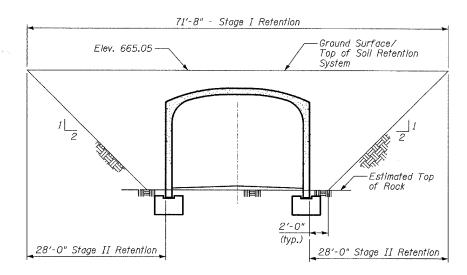

TEMPORARY SOIL RETENTION DETAILS

<u>NOTES</u>

REVISIONS

A cantilevered sheet piling design does not appear feasible and additional members or other retention systems may be necessary. The Contractor shall submit a temporary soil retention system design including plan details and calculations for review and acceptance by the Engineer.

See Roadway Plans for additional Maintenance of Traffic details.

For quantity and details of Temporary Concrete Barrier, See Roadway plans.

REVISION NAME	DATE	PEDESTRIAN TUNNEL STAGE CONSTRUCTION
		WASHINGTON - 75TH STREET F.A.U. ROUTE 2552 SECTION 00-00114-00-PV DUPAGE COUNTY