



**PLAN VIEW**

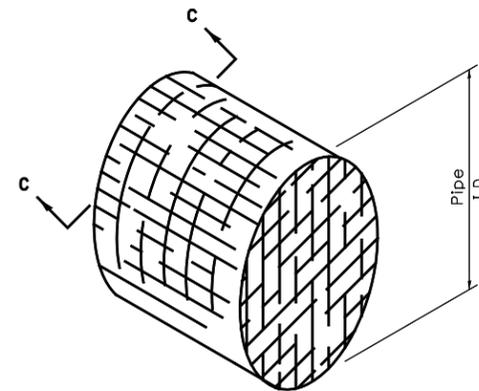

**DETAIL OF RODENT SHIELD**

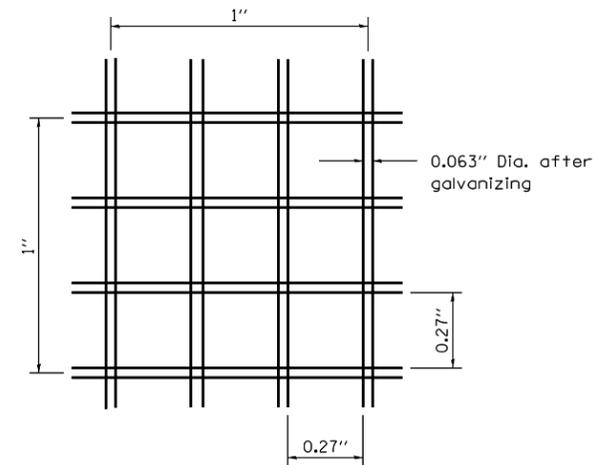

**SECTION C-C**

**NOTES**

The outlet pipe or pipes shall be located as close as possible to the center of the outlet protector.

The last 10' of outlet pipe shall be schedule 40 PVC.


The rebars may be cut or relocated to accommodate pipe.

Cut outlet pipe on a bevel to match finished surface of surrounding PCC.


Seeding Class 2 shall be considered included in the cost of the pay items.

**OUTLET PROTECTOR BILL OF MATERIALS**


| PAY ITEM                          | UNIT  | QUANTITY (EACH OUTLET PROTECTOR) |
|-----------------------------------|-------|----------------------------------|
| CLASS SI CONCRETE (MISCELLANEOUS) | CU YD | 1.5                              |
| REINFORCING BARS                  | LB    | 35.6                             |
| RODENT SHIELDS                    | EACH  | 1                                |

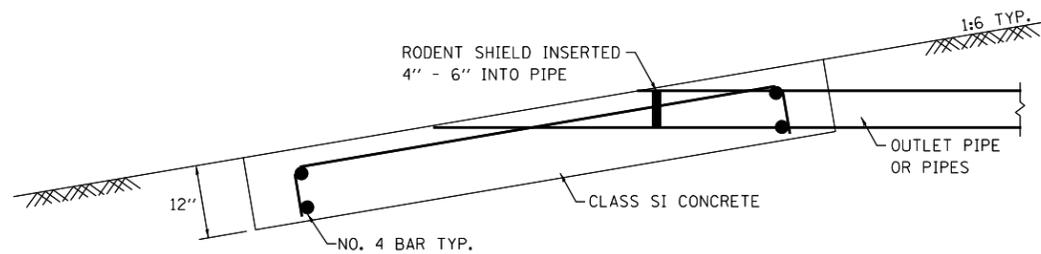

**SECTION A-A**

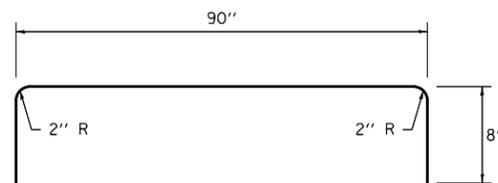

**#4 h BAR**

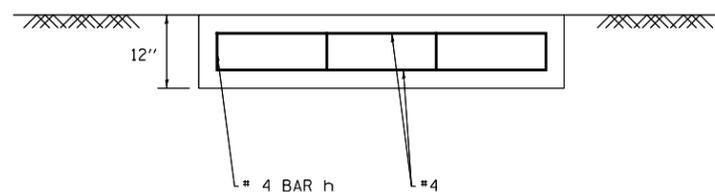

**SECTION B-B**

|             |                       |            |           |
|-------------|-----------------------|------------|-----------|
| FILE NAME = | USER NAME = \$USER*   | DESIGNED - | REVISED - |
| \$FILEL\$   |                       | DRAWN -    | REVISED - |
|             | PLOT SCALE = \$SCALE* | CHECKED -  | REVISED - |
|             | PLOT DATE = \$DATE*   | DATE -     | REVISED - |

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**OUTLET PROTECTOR**

SCALE: SHEET NO. 5 OF 6 SHEETS STA. TO STA.

**STANDARD 601101A**

| F.A.I. RTE.                                   | SECTION | COUNTY    | TOTAL SHEETS       | SHEET NO. |
|---|---------|-----------|--------------------|-----------|
| 57/70   | (25-4)R | EFFINGHAM | 1760               | 509       |
| FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT |         |           | CONTRACT NO. 74295 |           |