### 09-20-2024 LETTING ITEM 057

### INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES

0

0


0

3 SUMMARY OF QUANTITIES

### HIGHWAY STANDARDS

000001-08 701106-02 701601-09 001006 701301-04 701901-09 701001-02 701400-12 701006-05 701401-13





FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-6123
OR 811

PROJECT ENGINEER CHERYL KEPLAR
PROJECT MANAGER PHILLIP SAWYER


CONTRACT NO. 76T72

# STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

## PROPOSED HIGHWAY PLANS

VARIOUS ROUTES
SECTION DIST 8 ELECTRICAL 2025–1
REPAIR & MAINTENANCE OF ELECTRICAL
EQUIPMENT AT PUMP STATIONS
VARIOUS COUNTIES

C-98-107-24

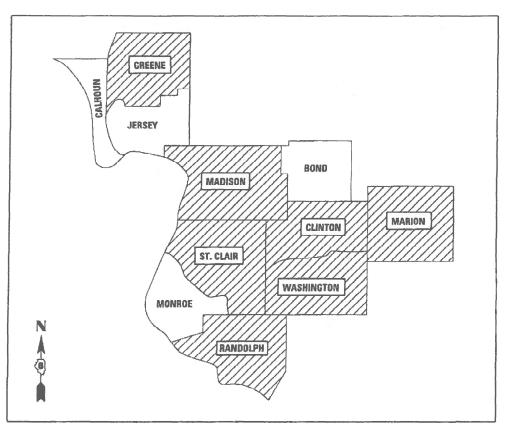

NOTE: WORK CAN BE LOCATED WITHIN ANY OF THE ABOVE COUNTIES WITHIN DISTRICT 8 / REGION 5.

#### D-98-045-24



### & ASSOCIATES, P.C.

Engineers - Architects - Surveyors

# 618 North 24th Street, Quircy, II.

# 610 Paris Grovel Road, Hannibad, MO

# 610 N. 4th Street, Saite 100, Burlington, Le

# 810 Paris Grovel Road, Hannibad, MO

# 810 North Prairies Street, Galesburg, II.


# 804 Liberty Street, Saite 102, Pelas, IA

# 103 Teast Alsh Susey, Colombia, Robert Main Street, Carbonodde, II.

Internet Addresss:

# 615 Spi2-7402

# 1615 Spi2



PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

### **GENERAL NOTES**

- 1. THE LOCATIONS OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER/DEPARTMENT.
- NO MATERIAL SHALL BE LEFT ON OR NEAR THE ROADWAY DURING NON-WORKING HOURS.
- 3. ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR APPROPRIATE STANDARDS LISTED ON THE COVER SHEET.
- 4. A FLAGGER SHALL BE REQUIRED AT ALL TIMES WHEN WORKING OR EQUIPMENT ARE ENCROACHING ON THE LANE OF TRAFFIC.
- 5. WHEN NO WORK IS BEING PERFORMED, THE FLAGGERS WILL NOT BE REQUIRED. IF THE FLAGGERS ARE NOT PRESENT, THE FLAGGER SIGNS SHALL BE REMOVED OR COVERED.
- 45 AND 55 MPH SIGNS ARE INCLUDED IN ALL INTERSTATE LANE CLOSURES. IF THE LANE CLOSURE DURATION IS LESS THAN 4 HOURS. THE 45 AND 55 MPH SIGNS ARE NOT REQUIRED.
- ANY WORK ORDER MAY BE CANCELLED AT THE ENGINEER'S/DEPARTMENT'S DISCRETION.
- 8. NO OVERNIGHT LANE CLOSURES WILL BE ALLOWED.



### **Work Order**

Requested By:		Date:		
Assigned To:	R	eceived From:		
Estimated Cost:				
Location:				
Problem:				
	Ref/Accident #:		Claim #:	
Remarks:				
Completed By:		AND		

KLINGNER
& ASSOCIATES, P.C.
Engineers • Architects • Surveyor 616 N.24TH ST. QUINCY, ILLINOIS 62301 217.223.3670 STATE OF ILLINOIS DESIGN FIRM NO. 184-2738

JSER NAME = aschafer	DESIGNED A	AMS	REVISED	-
	DRAWN A	AMS	REVISED	-
PLOT SCALE = 100.0000 / in.	CHECKED E	EBB	REVISED	-
PLOT DATE = 6/27/2024	DATE 4	4/22/2024	REVISED	-

SCALE: NONE

					CONSTRUCTION CODE	
				DISTRICT 8		
CODE			TOTAL	100% STATE		
				0044		
NO.		UNIT	QUANTITY	URBAN		
70100205	TRAFFIC CONTROL AND PROTECTION CTANDARD 701401	EACH.	1	1		
70100205	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	EACH	1	1		
70102631	TRAFFIC CONTROL AND PROTECTION, STANDARD 701601	EACH	1	1		
				_		
X0327020	SUBMERSIBLE MIXER	EACH	3	3		
X0327111	MAGNUM BREAKER	EACH	3	3		
V0227405	IOURNE VALANCE LE CERVICIAN		100	100		
X0327495	JOURNEYMAN ELECTRICIAN	HOUR	100	100		
X0327496	APPRENTICE ELECTRICIAN	HOUR	10	10		
X0327490	AFFRENTICE ELECTRICIAN	HOOK	10	10		
X0327497	PICK-UP TRUCK	HOUR	250	250		
X6327 137	TIEK OF THOOK	11001	230	230		
X0327498	BUCKET TRUCK (LENGTH LESS THAN 35 FEET)	HOUR	75	75		
X0327499	BUCKET TRUCK (LENGTH 35 TO 65 FEET)	HOUR	75	75		
V0227500	ADDOMIDOADD (TDAILED MOUNTED)	HOUR	2.5	25		
X0327500	ARROWBOARD (TRAILER MOUNTED)	HOUR	25	25		
X0327501	ATTENUATOR, CRASH (TRUCK MOUNTED)	HOUR	25	25		
7.0327301	ALIERON, GIVEN (MOCK HOUNTED)	113311	23	23		
X0327734	TRUCK CRANE	HOUR	25	25		
					· '	

5	KLINGNER	
, E	& ASSOCIATES, P.C.	
5	Engineers • Architects • Surveyors	1
:	616 N.24TH ST. QUINCY, ILLINOIS 62301 217 223 3670 STATE OF ILLINOIS DESIGN FIRM NO. 184-2738	1

DRAWN AMS REVISED -	
PLOT SCALE = 100,0000 / in. CHECKED EBB REVISED -	
PLOT DATE = 6/27/2024 DATE 4/22/2024 REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

							F.A.I. RTE	SEC.	COUNTY	TOTAL SHEETS	SHEET NO.				
	SUMMARY OF QUANTITIES						*	DIST 8 ELECT	RICAL 2	025-1	VARIOUS	3	3		
							* VA	RIOUS			CONTRAC	T NO.	76T72		
	SCALE: NONE	SHEET	1	OF	1	SHEETS	STA.	TO STA.		ILLINOIS FED. AID PROJECT			D PROJECT		

CONSTRUCTION CODE