CONTRACT NO. 72A90

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
685	115 BR-1	HANCOCK	44	15A
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

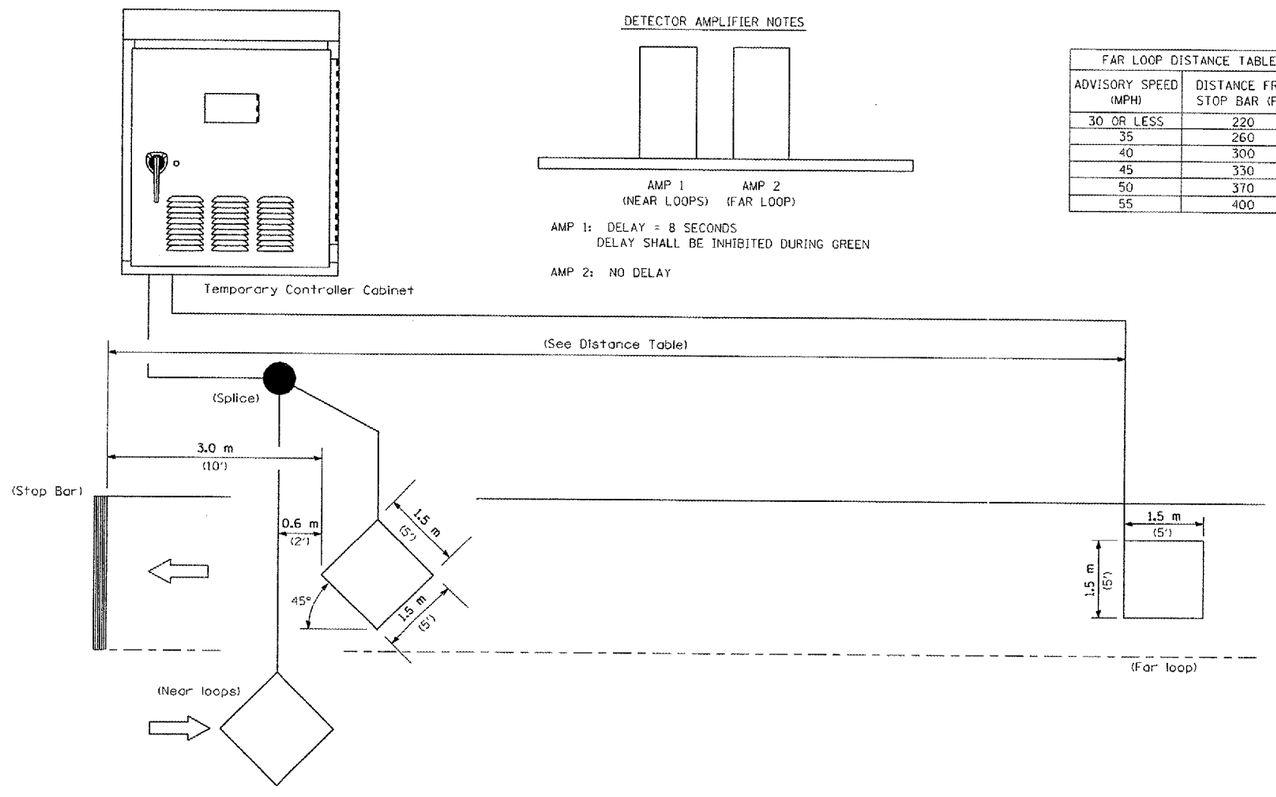

NOTE: All loops centered in lane.

DETECTOR AMPLIFIER NOTES

AMP 1: DELAY = 8 SECONDS
DELAY SHALL BE INHIBITED DURING GREEN

AMP 2: NO DELAY

FAR LOOP DISTANCE TABLE	
ADVISORY SPEED (MPH)	DISTANCE FROM STOP BAR (FT.)
30 OR LESS	220
35	260
40	300
45	330
50	370
55	400

INDUCTION LOOP DETECTOR

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL & PROTECTION

TEMPORARY BRIDGE TRAFFIC SIGNAL
LOOP PLACEMENT DETAIL SHEET

SCALE: VERT. HORIZ. NONE

DRAWN BY DIST. 6

DATE

CHECKED BY

PLOT DATE = Aug-13-2007 10:25:08AM
FILE NAME = c:\projects\65138?\loopdetail.dgn
PLOT SCALE = 125.8824 ' / IN.
USER NAME = bagshaw1