
FA-RTE SECTION COUNTY TOTAL SHEET NO 05-00026-01-MS MADISON 43 9 05-00026-01-MS MADISON

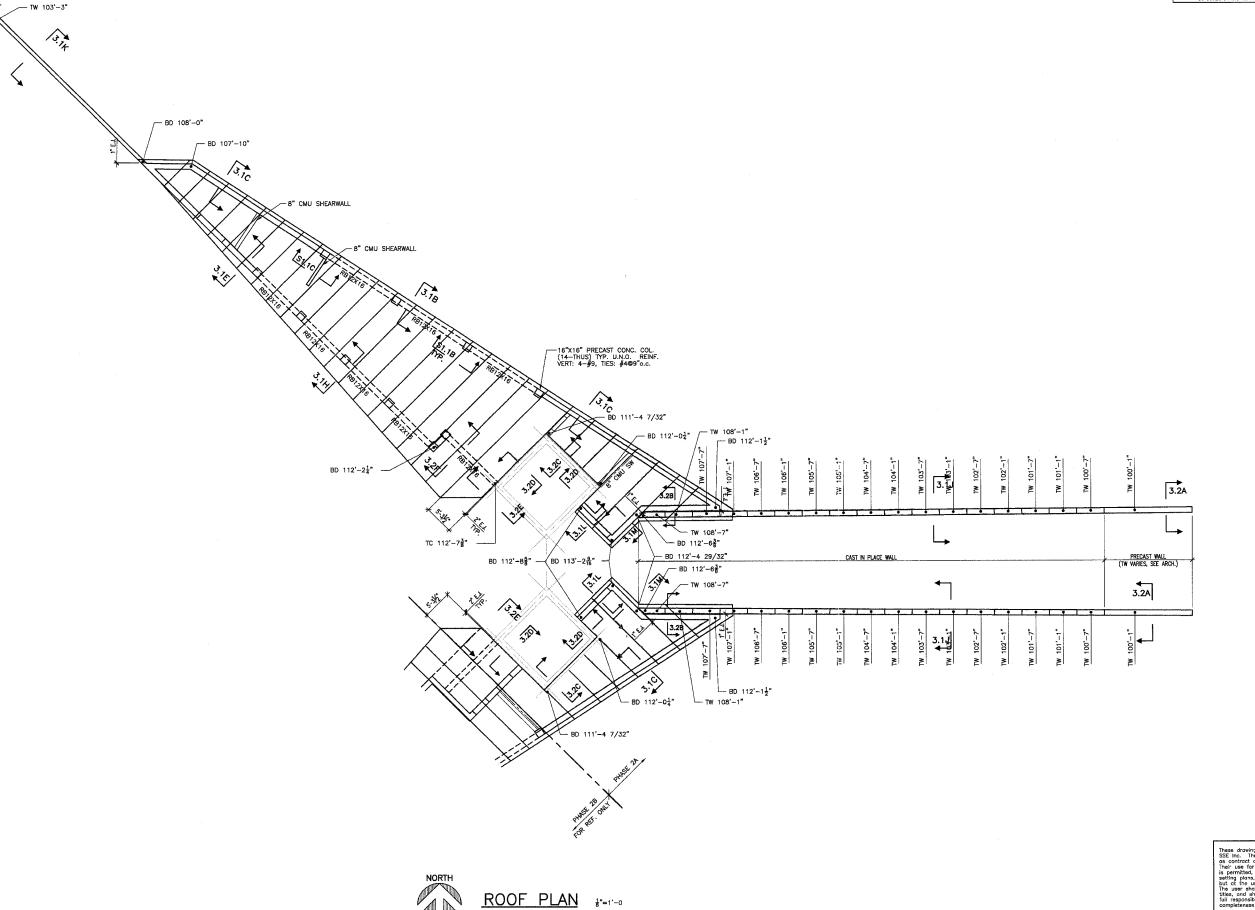

NOTES:

NOTES:

1. ROOF CONSTR: RIGID INSULATION ON 4'-0"X8" DP. (MAX.) PRESTRESSED HOLLOW CORE NORM. WT. CONC. SLAB. (TYPE 4HC8-66-5 OR APPROVAL EQUAL), TOP OF SLAB VARIES DESIGN CRITERIA: DL. = 20PSF

2. ALL EMBEDS ARE GALVANIZED WHERE EXPOSED.

3. PRECAST CONTRACTOR TO PROVIDE CONNECTION BETWEEN WALL PANEL TO WALL PANEL, WALL PANEL TO COL. FOR 200 Ibs/fit in BOTH OIRECTIONS.

4. PRECASTER IS RESPONSIBLE FOR COORDINATING FABRICATION OF CONCRETE PANELS WITH LOCATION OF ALL ELECTRICAL, NECHANICAL, AND PLUMBING DEVICES. PANELS SHOULD BE DESIGNED TO INCLUDE ALL KNOCKOUTS AND VOIDS REQUIRED FOR DUCTWORK AND JUNCTION BOXES. THEY SHOULD ALSO INCLUDE CONDUIT FOR THE WIRING OF ALL DEVICES.

These drawings are the property of SSE Inc. They are furnished os contract documents any. The property of the second or contract documents and the second or setting plans, if approved by the Engineer, but at the users risk. The second of th

The seal(s) and signature(s) apply only to the document to which they are affixed, an expressly disciolim any responsibility for all or other documents or instruments relating or intended to be used for any part or parts of the architectural or engineering project.

SHEET NO

SSE PROJECT NO: 02111 PHASE 2A

S2.2A

211 N. Broadway Suite 1900 St. Louis, MO 63102 (314) 241-8188 X (314) 241-0125

Memorial Tower

phase 2a Lewis and clark

VILLAGE OF HARTFORD, ILLINOIS Hartford, Illinois 62049

KENNEDY PROJECT NO KAIN 10-02048

PLAN

ROOF

BRUE DATE 03-JUNE-05