


STREET LIGHTING – BILL OF MATERIAL – THIS SHEET

NOTES:
 1. AN EXPANSION DEFLECTION COUPLING SHALL BE INSTALLED AT THIS LOCATION. COST FOR EXPANSION / DEFLECTION COUPLING SHALL BE INCIDENTAL TO "CONDUIT EMBEDDED IN STRUCTURE, 2" DIA., PVC."

PAY ITEM	UNIT	QTY
CONDUIT EMBEDDED IN STRUCTURE, 2" DIA., PVC	FOOT	1548
ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 6	FOOT	1444
ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 4	FOOT	2920
LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 400 WATT	EACH	12
LIGHT POLE FOUNDATION, SPECIAL	FOOT	30
LIGHT POLE, GALVANIZED STEEL, 50 FT. M.H., 12 FT. MAST TWIN	EACH	6

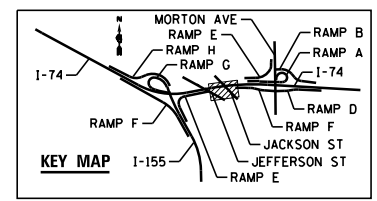

FILE NAME =	DESIGNED - BENESCH	REVISED -
...\\D468620-shd-1-74-light08.dgn	DRAWN - NLH	REVISED -
USER NAME = tblank	CHECKED - GHT	REVISED -
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -



**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**I-74
 LIGHTING PLANS**
 SCALE: 1"=50' SHEET NO. 10 OF 138 SHEETS STA. 561+00 TO STA. 576+00

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-114R(14HB-4,14,14HVB)BRJ	TAZEWELL	ILLINOIS	2433	1725
CONTRACT NO. 68620				
ILLINOIS FED. AID PROJECT				