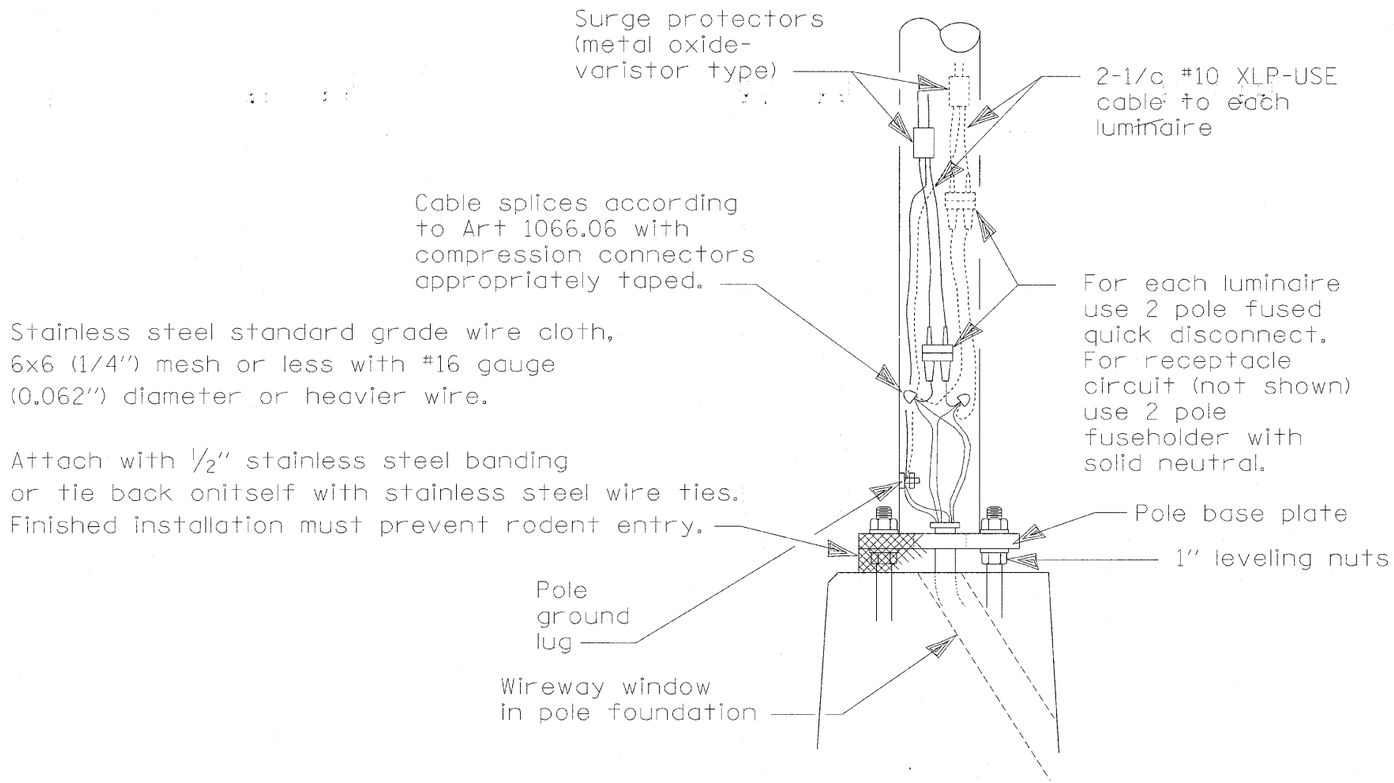

WIRING DETAIL

NO SCALE

GENERAL NOTES

All taped splices shall use 2 layers of electrical tape over 3 layers of rubber tape as required by the Standard Specifications. Coat the finished taped splice with bonding compound.

All cable splices shall be taped unless another method has been specifically approved by the Engineer.

For example purposes the pole is shown on an anchor base. If the pole is required to be set on a breakaway base, consult the Standard Specifications.

All dimensions are in millimeters (inches) unless otherwise shown.

POLE HANDHOLE WIRING

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - JM	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIDEWALK AND LANDSCAPE LIGHTING PLANS	F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - JB	REVISED -			1279	6R,B	LA SALLE	190	102
TENG TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT SCALE = $SCALE$	CHECKED - RS	REVISED -					CONTRACT NO. 66547		
	PLOT DATE = 8-24-2010	DATE - 08/10	REVISED -		SCALE: N/A / SHEET NO. OF SHEETS / STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

..\D366547-BORDER.DGN 8:24:2010, 14:38:24 BONDHUJO \\FS-0044\AMVVAULT.D-TRANS.07\2202\28477-001\CIVIL\CAD\66547\SHEET\D366547-SHT-ROADDET7.DGN