STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS

FOR INDEX OF SHEETS, SEE SHEET NO. 2

 \circ

 \circ


 \circ

 \circ

PROPOSED HIGHWAY PLANS

F.A.I. ROUTE 55 (I-55)
SECTION (57-7HB-2 & 57-7HB-1)BR
PROJECT ACBRI-055-4(172)156
MCLEAN COUNTY

C-95-041-06
BRIDGE REPLACEMENT
OVER I-74 (EB)& I-55 BUSINESS (SB)
SOUTHWEST OF BLOOMINGTON

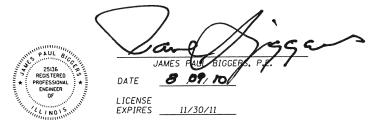

PLANS PREPARED BY:



6450 South Sixth Street Road, Suite B Springfield, Illinois 62712 Phone: (217) 529-4534 Fax: (217) 529-8278

EXISTING SN 057-0005 AT STA. 626+53.53

CARRYING F.A.I. 55 NB TRAFFIC OVER F.A.I. 74

EASTBOUND TO BE REMOVED AND REPLACED.

PROPOSED SN 057-0250 AT STA. 626+53.70

3-SPAN PLATE GIRDER BRIDGE 295'-0" BK-BK.

SKEW 59° 27' 54" LEFT FWD.

PROJECT ENDS

STA, 658+24

EXISTING SN 057-0004 AT STA. 644+38.15

CARRYING F.A.I. 55 NB TRAFFIC OVER BUSINESS F.A.I. 55

SOUTHBOUND TO BE REMOVED AND REPLACED.
PROPOSED SN 057-0249 AT STA. 644+36.37

3-SPAN PLATE GIRDER BRIDGE 200'-0" BK-BK.

SKEW 30° RIGHT FWD.

1"= 40'


50'
100'
- 1"= 30'
- 1"= 20'

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1–800–892–0123
OR 811 BLOOMINGTON TOWNSHIP

PROJECT ENGINEER: JASON STULTS (217)466-7364 PROJECT MANAGER: RUSTIN KEYS (217)466-7225

CONTRACT NO. 70520

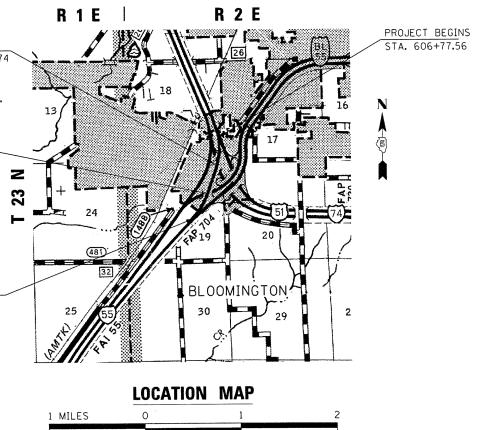

GROSS LENGTH = 5,146.44 FEET = 0.975 MILES

NET LENGTH = 5,146.44 FEET = 0.975 MILES

D-95-040-06



INTERSTATE
F.A.I. 55


ADT (2008) = 11,900

ADT (2028) = 16,600

PV = 65.3% SU = 4.4% MU = 30.3%

DESIGN SPEED = 70 MPH

DESIGN DESIGNATION: 14,955 INTERSTATE 29.26 (PCC-20)



PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS