

CONTROLLER

SERVICE INSTALLATION

SIGNAL HEAD

SIGNAL HEAD WITH BACKPLATE

SIGNAL HEAD, PEDESTRIAN

SIGNAL POST

MAST ARM ASSEMBLY AND POLE, STEEL

HANDHOLE

HEAVY DUTY HANDHOLE

DOUBLE HANDHOLE

G.S. CONDUIT IN TRENCH OR PUSHED

PEDESTRIAN PUSHBUTTON DETECTOR

EXISTING

PROPOSED

DETECTOR LOOP

CONCRETE JUNCTION BOX

CAST IRON JUNCTION BOX

COMMON TRENCH

MAST ARM ASSEMBLY AND POLE. ALUMINUM

EMERGENCY VEHICLE SYSTEM DETECTOR

SIGNAL HEAD OPTICALLY PROGRAMMED


CONDUIT SPLICE

WOOD POLE

RACEWAY FOR MAGNETIC DETECTOR. TYPE I
OR TYPE II

VEHICLE DETECTOR. NON-COMPENSATED
MAGNETIC TYPE

RAILROAD CONTROL CABINET

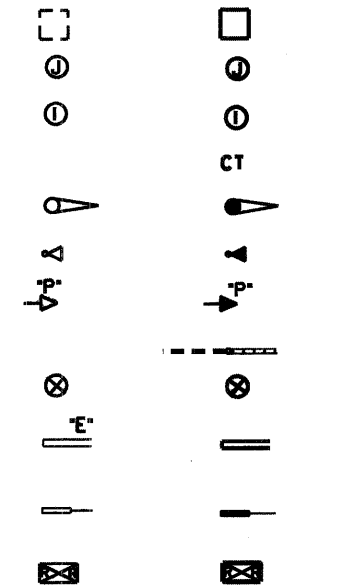

MCLEAN BLVD

SPRING STREET


REMOVE EXISTING PEDESTRIAN SIGNAL HEAD

SCHEDULE OF QUANTITIES

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
87301215	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 2C	FOOT	613
87301225	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C	FOOT	613
88800100	PEDESTRIAN PUSH-BUTTON	EACH	8
88102717	PEDESTRIAN SIGNAL HEAD, L.E.D., 1-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER	EACH	8
89502200	MODIFY EXISTING CONTROLLER	EACH	1
85000200	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION	EACH	1
X0325890	RE-OPTIMIZE TRAFFIC SIGNAL SYSTEM LEVEL 1	EACH	1
X8950307	REMOVE EXISTING PEDESTRIAN SIGNAL HEAD	EACH	4

CONTRACT NO. 63125

GRAPHIC SCALE



FILE NAME =	USER NAME = #USER#	DESIGNED - PH	REVISED -	KANE COUNTY DIVISION OF TRANSPORTATION	McLEAN BLVD / SPRING STREET SIGNAL MODIFICATIONS				F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
#FILE#		DRAWN - PSL	REVISED -						2509	08-00094-02-BT	KANE	33	7
	PLOT SCALE = #SCALE#	CHECKED - PH	REVISED -										
	PLOT DATE = #DATE#	DATE - 11/24/08	REVISED -										
					SCALE: 1"=20'	SHEET NO.	OF	SHEETS	STA.	TO STA.			
					STA. TO STA.								