



ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE)


SERVICE INSTALLATION POLE MOUNT (SHOWN)

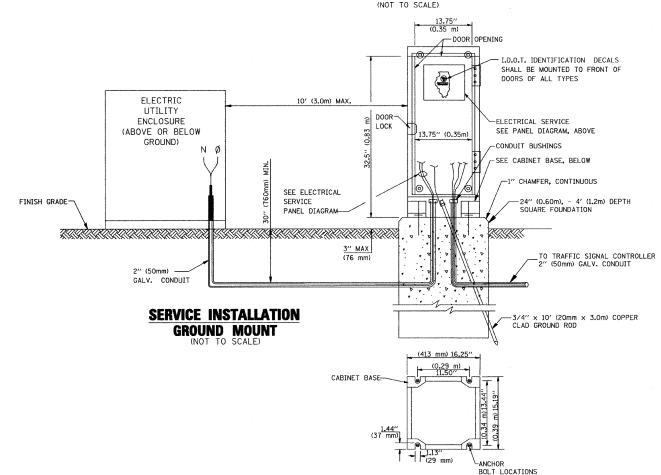


CABINET - BASE BOLT PATTERN

1. ELECTRIC SERVICE PANELS SHALL BE CONSTRUCTED TO U.L. STD 508,





DETAIL "B"

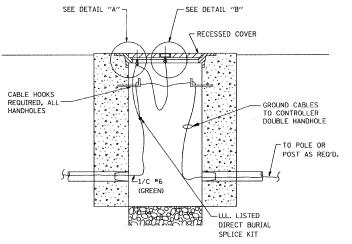

HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

(2) 1/2" \times 1 1/4" STAINLESS STEEL BOLT WITH SPLIT LOCK WASHER AND NYLON INSERT LOCKOUT WELDED TO $\overline{}$ FRAME AND TO COVER, (TYPICAL) HEAVY DUTY COPPER COMPRESSION GROUNDING TERMINAL. (TYPICAL) - GROUNDING CABLE (PAID FOR SEPARATELY) EXISTING HANDHOLE

EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL


(NOT TO SCALE)


NOTES:


GROUNDING SYSTEM



- 1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR TYPE XLP. NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN RACEWAYS, THE GROUNDING CABLE SHALL BE INSTALLED IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED. ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE (HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.). GROUND ROD SHALL BE 3/4" DIA. x 10'-0" (20mm x 3.0m) LONG, COPPER CLAD, ONE GROUND ROD SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS, CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS. THE RESIDENT ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC, ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT (847) 705-4139.
- 2. THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.
- 3. ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS IN THE CONTROLLER CABINET.
- 4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.








3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL)

• ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED. GROUND CABLE SHALL BE LOOPED OVER HOOKS IN THE HANDHOLES 6.5' (2.0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13' (4.0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES. 5' (1.4m) OF SLACK SHALL BE PROVIDED BETWEEN FRAME AND COVER.

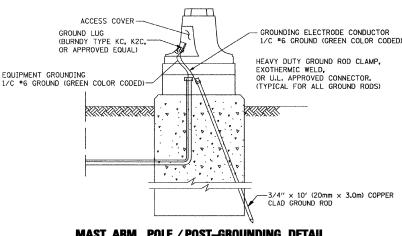

MAST ARM POLE / POST-GROUNDING DETAIL

REVISIONS	T	THEMOTO	DEDARTHENT OF T	FOANCOODTATION
	DATE	ILLINUIS	DEPARTMENT OF T	RANSPURTATION
CADD 5	5/30/00			
CADD	3/15/01		DISTRICT (ME
BUREAU OF TRAFFIC	1/01/02		510 / / / / /	
		STAN	DARD TRAFFI	[C SIGNAL
			DESIGN DET	ATIC
		DESIGN DETAILS		
		SCALE: NONE		DRAWN BY: RWP DESIGNED BY: DAD
				CHECKED BY: DAZ
1	f i			SHEET 3 OF 4

TS05