

Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

October 31, 2025

SUBJECT: FAU 5834 & FAU 5836 (19th St. & 27th St.)
Section 23-00291-00-BT (Moline)
Rock Island County
Contract No. 85785
Item 122
November 7, 2025 Letting
Addendum (B)

NOTICE TO PROSPECTIVE BIDDERS:

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

- 1. Revised Special Provisions Index**
- 2. Added pages 22A & 22B to the Special Provisions**

Prime contractors must utilize the enclosed material when preparing their bid and must include any changes to the Schedule of Prices in their bid.

Very truly yours,

A handwritten signature in black ink, appearing to read 'Jack A. Elston'.

Jack A. Elston, P.E.
Bureau Chief, Design and Environment

Index of Special Provisions

CONTRACT SPECIAL PROVISIONS	1
LOCATION OF WORK.....	1
DESCRIPTION OF WORK.....	1
CITY OF MOLINE SUPPLEMENTAL SPECIFICATIONS	1
COMPLETION DATE (PLUS WORKING DAYS)	1
TRAFFIC CONTROL PLAN	2
AGGREGATE FOR TEMPORARY ACCESS	4
STATUS OF UTILITIES/UTILITIES TO BE ADJUSTED	5
FIRE HYDRANTS TO BE RELOCATED	6
WATER VALVES TO BE ADJUSTED.....	6
COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24 (ABUTTING EXISTING PAVEMENT)	7
TEMPORARY TRAFFIC SIGNAL INSTALLATION	7
REMOVE EXISTING SERVICE INSTALLATION	8
REMOVE AND REINSTALL VIDEO DETECTION CAMERA	8
REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT	8
LED SIGNAL FACE, LENS COVER	9
EMERGENCY VEHICLE PRIORITY SYSTEM	9
EMERGENCY VEHICLE PRIORITY SYSTEM LINE SENSOR CABLE, NO. 20 3/C.....	10
VIDEO VEHICLE DETECTION SYSTEM	11
PREFORMED JOINT STRIP SEAL	17
STORM SEWER, (WATER MAIN QUALITY PIPE).....	17
ISLAND REMOVAL.....	19
ISLAND PAVEMENT REMOVAL AND REPLACEMENT	20
TREE, BETULA NIGRA HERITAGE (HERITAGE RIVER BIRCH), 12' HEIGHT, CLUMP FORM, BALLED AND BURLAPPED.....	20
REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES.....	20
RELOCATING NAME PLATES.....	21
WASHOUT BASIN.....	21
REMOVE EXISTING FLARED END SECTION.....	22
REMOVE SIGN COMPLETE	22
FORM LINER TEXTURED SURFACE	22A
STORMWATER POLLUTION PREVENTION PLAN (SWPPP)	23
SPECIAL PROVISION FOR INSURANCE LR 107-4.....	35
SPECIAL PROVISION FOR CONSTRUCTION AND MAINTENANCE SIGNS LR 702	36


FORM LINER TEXTURED SURFACE

Description:

This work shall consist of installing a form liner textured surface to the cast-in-place concrete wall in accordance with Section 503 of the Standard Specifications, the plans, the provisions herein and as directed by the Engineer.

Surface Pattern:

The aesthetics of exposed surface panels for the retaining wall shall be as follows:

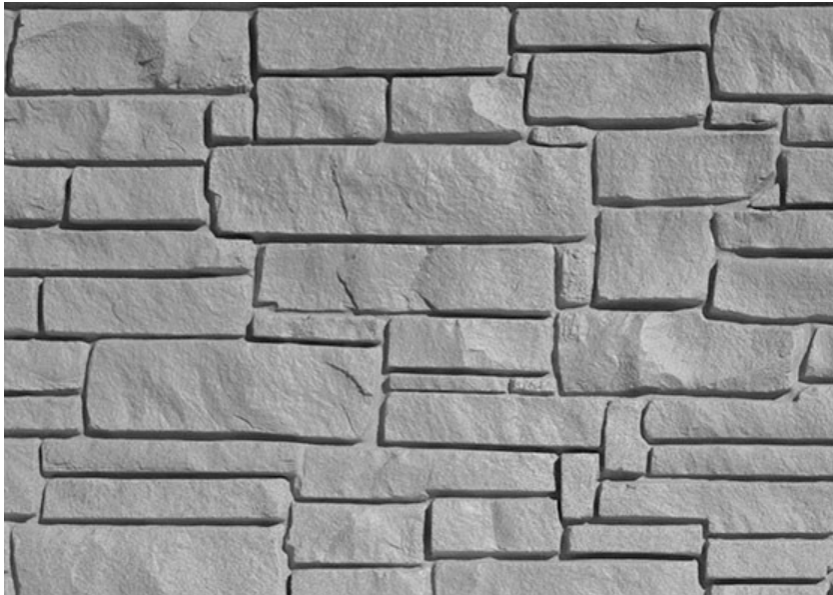

The pattern of the form liner shall appear natural and non-repeating. Seam lines or match lines caused from two or more molds coming together will not be apparent when viewing final wall. The molds shall be removable without causing deterioration of surface or underlying concrete.

The forms shall be properly braced or tied together to maintain position and shape. The forms shall be made sufficiently tight to prevent leakage of the mortar. The formwork shall have the strength and stability to ensure finished concrete dimensions within the tolerances specified herein.

The wall shall be constructed with a coursed stone rusticated surface with a 1" relief. The finish shall consist of a Random Ashlar Stone finish and shall have a minimum 0.75 in impression.

The Engineer has pre-approved the following form liner suppliers and patterns for the textured surface:

1. Sika Corporation, IL – Pattern #477 Meramec Drystack Stone. usa.sika.com
2. Scott System, CO – Pattern #189, Teton Drystack. www.scottsystem.com
3. Custom Rock, MN – Pattern #1208, Drystack. www.customrock.com

Any other similar form liner and its specifications must be submitted to the Resident Engineer for approval.

Any touch up and repair is at the Contractor's expense and shall be carried out according to the manufacturer's recommendations or as directed by the Engineer.

The Contractor shall submit a 2 ft x 2 ft sample of the textures and patterns proposed for use on the project for approval.

Basis of Payment:

This work shall be paid for at the contract unit price per SQUARE FOOT for FORM LINER TEXTURED SURFACE.