INDEX

36-38 CROSS SECTION SHEETS

0

0

0

0

COVER SHEET GENERAL NOTES & LOCATION SUMMARY OF QUANTITIES TYPICAL SECTIONS 10-11 SCHEDULES PLAN AND PROFILE SHEETS TRAFFIC CONTROL STAGE | AND | I TYPICAL SECTIONS TRAFFIC CONTROL STAGE I 16-17 TRAFFIC CONTROL STAGE II STRUCTURE REPAIR PLANS 29-32 EXISTING BRIDGE PLANS - FOR INFORMATION ONLY

LIST OF ILLINOIS DOT HIGHWAY STANDARDS


STANDARD SYMBOLS. ABBREVIATIONS AND PATTERNS AREAS OF REINFORCEMENT BARS 001001-02 DECIMAL OF AN INCH AND OF A FOOT 900100 280001-07 TEMPORARY EROSION CONTROL SYSTEMS HMA SHOULDER ADJACENT TO FLEXIBLE PAVEMENT 482001-02 HMA SHOULDER ADJACENT TO RIGID PAVEMENT 482006-03 482011-03 HMA SHOULDER STRIPS/SHOULDERS WITH RS OR WIDENING & RS PROJECTS 630001-10 STEEL PLATE BEAM GUARDRAIL 630201-06 PCC/HMA STABILIZATION AT STEEL PLATE BEAM GUARDRAIL 630301-06 SHOULDER WIDENING FOR TYPE I (SPECIAL) GUARDRAIL TERMINALS 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT REFLECTOR MARKER AND MOUNTING DETAILS 635011-02 642006 SHOULDER RUMBLE STRIPS, 8 INCH OFF-ROAD MOVING OPERATIONS 2L, 2W, DAY ONLY 701011-03 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS 701301-04 701306-03 LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS ≥ 45 MPH 701311-03 LANE CLOSURE. 2L, 2W, MOVING OPERATIONS - DAY ONLY 701321-13 LANE CLOSURE, 2L, 2W, BRIDGE REPAIR WITH BARRIER LANE CLOSURE, 2L. 2W, PAVEMENT WIDENING, FOR SPEEDS ≥ 45 MPH 701326-04 701901-02 TRAFFIC CONTROL DEVICES TEMPORARY CONCRETE BARRIER 704001-07 780001-03 TYPICAL PAVEMENT MARKINGS

TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

70/001-02 701006-04

781001-03

000001-06



FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES, IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E. JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION 1-800-892-0123 OR 811

PROJECT ENGINEER - CRAIG REED, P.E. UNIT CHIEF - PAT BRABOY, P.E. TOWNSHIP - MISSION

CONTRACT NO. 66B13

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS

PROPOSED HIGHWAY PLANS


FAP ROUTE 311 (IL 71) SECTION (4)BR-1

PROJECT : ACNHPP-0311(047)

TYPE of IMPROVEMENT: REPLACE STRUCTURE WITH BOX CULVERT

LASALLE COUNTY

C-93-019-13

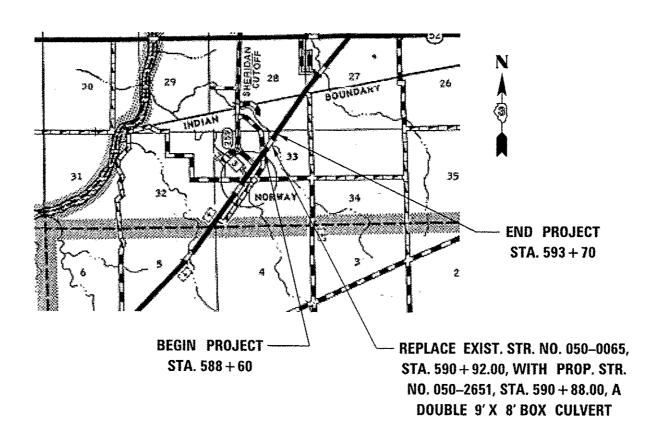

GROSS LENGTH = 510.0 FT. = 0.097 MILE NET LENGTH = 510.0 FT, = 0.097 MILE


SECTION LASALLE 38 1 (4)88-1 CONTRACT NO. 66813

D-93-020-13



FUNCTIONAL CLASSIFICATION OTHER PRINCIPAL ARTERIAL

2011 ADT = 4700 VPDPV = 89.3% SU = 4.3% MU = 6.4%



PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS