LEGEND FOR STORM WATER POLLUTION PREVENTION PLAN

SYMBOL AGGREGATE (EROSION CONTROL) [STONE DUMPED RIPRAP DITCH CHECKS: Height = 0.6m (2')] TEMPORARY DITCH CHECKS INLET PIPE PROTECTION (1&PP) EROSION CONTROL FENCE EARTH EXCAVATION FOR EROSION CONTROL (SEDIMENT BASINS) PRESERVE EXISTING TREES, WOODLANDS, AND UNDERSTORY (OUTSIDE CONSTRUCTION LIMITS) ITEM PLACED AT BEGINNING OF CONSTRUCTION (Requirement) ITEM PLACED AS DIRECTED BY ITEM ENGINEER (When required by situation) \Rightarrow DIRECTION OF OVERLAND FLOW


GENERAL NOTES:

The symbology on the STORM WATER POLLUTION PREVENTION PLAN sheets does not represent the size or quantity of bales, for number of bales refer to details and notes

shown on this sheet and/or as directed by the Engineer.

All items shall be constructed as shown on this sheet, on Standard 280001, and as directed by the Engineer.

THE CONTRACTOR SHALL INSTALL DITCH CHECKS AS DIRECTED BY THE ENGINEER. IF THE ENGINEER ELECTS TO UTILIZE FLUSH RIPRAP DITCH CHECKS IN LIEU OF TEMPORARY DITCH CHECKS AS SHOWN ON THE FOLLOWING PLAN SHEETS, THE SPACING SHOULD BE DOUBLED.

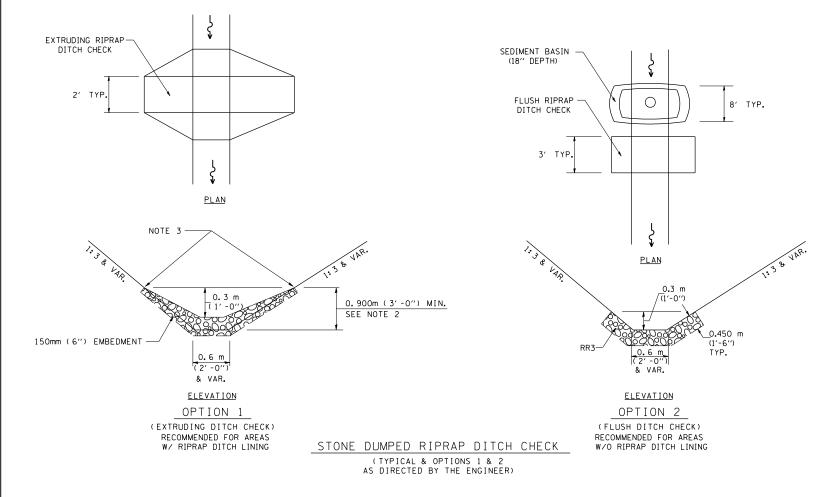

NOTE 1: BALES SHALL EXTEND FAR ENOUGH UP THE SLOPES TO ALLOW 0.3m (1') OVERTOPPING TO AVOID ERODING AROUND THE EDGES OF THE BALES.

NOTE 2: RIPRAP SHALL EXTEND FAR ENOUGH UP THE SLOPES TO ALLOW 0.3m (1') OVERTOPPING TO AVOID ERODING AROUND THE EDGES OF THE RIPRAP.

NOTE 3: ENDS SHALL BE TIED INTO SLOPES.

| NAME | DATE | CAD Symbol | 2AUG99 | JCN | MAR2004 | ST

ILLINOIS DEPARTMENT OF TRANSPORTATION

STORM WATER POLLUTION PREVENTION PLAN

SCALE: VERT. HORIZ. DATE: APRIL 5, 1999

DRAWN BY CADD CHECKED BY JCN