
F.A.I.	SECTION	1	COUN.	TY	TÖTAL SHEETS	SHEET NO.	
94/90	2003-028F		C00	K	419	308	
STA.		TO	STA.				
FED. ROA	AD DIST. NO.	ILLINOI	FED.	AID	PROJECT		


62580

BILL OF MATERIAL

ITEM DESCRIPTION	UNIT	TOTAL	SN 016-0137	SN 016-1110	SN 016-1111	SN 016-1112	SN 016-1113	SN 016-1114	SN 016-1115 3	SN 016-1116	SN 016-1117	SN 016-1118	SN 016-1047	SN 016-1059	SN 016-1070	SN 016-1140
ADJUSTING DRAINAGE SCUPPERS, TYPE A	EACH	107	10	8	11	26	3		8	8	27	2	2	-	-	2
ADJUSTING DRAINAGE SCUPPERS, TYPE B	EACH	26	-	-	-	1	2	10	3	_	7	3	-	-	-	-
ADJUSTING DRAINAGE SCUPPERS, TYPE C	EACH	109	11	11	12	12	12	-	20	8	-	16	1	-	4	2

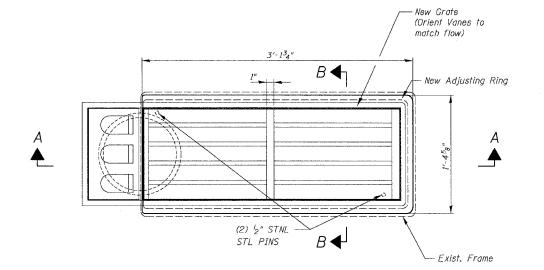

PLAN O TYPE C SCUPPER

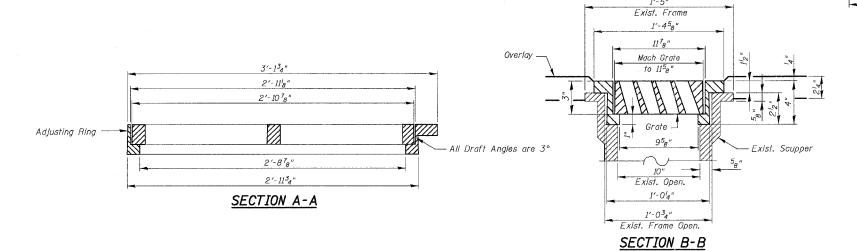

DRAINAGE SCUPPER DETAILS - TYPE C

Vane Grate 3943-0002 machined to fit

Seal gap with approved sealant as req'd.

New Adjusting Ring

New Adjusting Ring

New Vane Grate

Pydroscarification ½"

New Vane Grate

Exist. Scupper Frame

SECTION THRU TYPE C SCUPPER

-Exist. Parapet to remain

- Side Grate (see note 2)

Notes

- 1. For the scuppers marked on plan sheets SN 0.16-1111 (3 Req'd) as 🔄 , the contractor shall verify the exact location, type and dimensions before he orders the material. The quantitiy and pay item is included in "Adjust Drainage Scuppers, Type A".
- 2. At SN 016-1070 (Ramp D), scupper plates (side grates) at the side of the parapet are missing. The confractor shall verify location, type and dimensions for these side plates before ordering the material. The cost for furnishing and installing these grates shall be included in "Adjusting Drainage Scuppers" of the type specified. IEstimated No. Required: Three (3) Type CI.
- 3. For scupper locations, see Partial Deck Plan Sheets.

(Neenah 3943-0002)

4. A paint stripe shall be applied over the existing stripe to the face of the Concrete Barrier Wall at all drainage scupper locations. The stripe shall be 4" wide x 12" long and extend vertically at 90 degrees from the top edge of the barrier. The paint color shall be specified by the Engineer. Cost of the strip is to be included in "Adjusting Drainage Scuppers" of the type specified.

REVISIONS		THE THORE DEPARTMENT OF TRANSPORTATION								
NAME	DATE	ILLINOIS DEPARTMENT OF TRANSPORTATION								
		F.A.I. 94/90 (DAN RYAN EXPRESSWAY)								
		NB DAN RYAN ELEVATED BRIDGE								
		REPAIR FROM 15TH TO 28TH STREETS								
		ADJUSTING DRAINAGE SCUPPER								
		DETAILS								

SCALE: N/A DATE: 8/12/2005 DRAWN BY: BDC CHECKED BY: BLU

BOWMAN, BARRETT & ASSOCIATES INC.
CONSULTING ENGINEERS
Chicago, Illinois
312.228.0100
www.bbandainc.com