AVENUE A/2ND STREET
TYPICALS

ROCK FALLS APPLIES THIS TO THEIR PROJECT

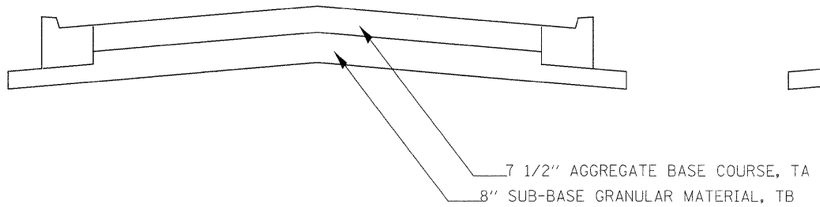

D2 INCLUDES THIS WITH THEIR PROJECT

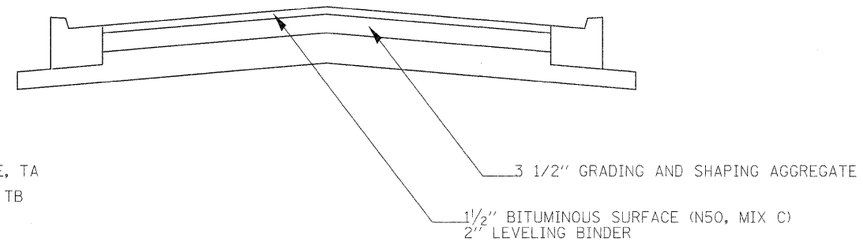

LOCAL ROAD REPAIR (COMMITMENT)	30103000 SHAPING AND GRADING ROADWAY	40600625 LEVELING BINDER (MACHINE METHOD), N50	40603310 HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	42400200 PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	42400800 DETECTABLE WARNINGS	44000155 HOT-MIX ASPHALT SURFACE REMOVAL, 1 1/2"	44000500 COMBINATION CURB AND GUTTER REMOVAL	44000600 SIDEWALK REMOVAL	60604400 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.18	78001110 PAINT PAVEMENT MARKING - LINE 4"	78001130 PAINT PAVEMENT MARKING - LINE 6"	78001180 PAINT PAVEMENT MARKING - LINE 24"
LOCATION	(UNIT)	(TON)	(TON)	(SQ FT)	(SQ FT)	(SQ YD)	(FOOT)	(SQ FT)	(FOOT)	(FOOT)	(FOOT)	(FOOT)
E 2ND TO AVE A	1	30	22	88	10	267	30	88	30	464	105	32
AVE A FROM E 2ND TO E 3RD	6	179	134			1600				80	101	21
TOTAL	**7**	**209**	**157**	**88**	**10**	**1867**	**30**	**88**	**30**	**544**	**206**	**53**

TEMPORARY EASMENT THROUGH RELIANT SITE	31100910 SUBBASE GRANULAR MATERIAL, TYPE A 12"	Z0028415 GEOTECHNICAL REINFORCEMENT
LOCATION	(SQ YD)	(SQ YD)
TEMP EASEMENT	1667	1667
TOTAL	**1667**	**1667**

LOCAL ROAD REPAIR (CONTINGENCY)	40600625 LEVELING BINDER (MACHINE METHOD), N50	40603310 HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	44000155 HOT-MIX ASPHALT SURFACE REMOVAL, 1 1/2"
LOCATION	(TON)	(TON)	(SQ YD)
E 3RD STREET	119	90	1067
W 2ND STREET	567	426	5067
5TH AVE	90	67	800
W 1ST STREET	567	426	5067
TOTAL	1344	1008	12000
20% OF TOTAL	**269**	**202**	**2400**

*CONTINGENCY ITEMS TO BE USED AS NEEDED

COMMITMENTS

NOTE: SUBBASE GRANULAR MATERIAL, TYPE A SHALL BE CA2.

UPON COMPLETION OF STAGE 1, WHEN THE TEMPORARY EASEMENT LOCATED THROUGH THE RELIANT SITE WILL NO LONGER BE NEEDED, THE CONTRACTOR SHALL IMMEDIATELY RESURFACE AVENUE A AND E 2ND STREET. AT THAT TIME THE CONTRACTOR SHALL ALSO REPLACE AFFECTED CURB AND GUTTER AND SIDEWALK SECTIONS.

CONTRACTOR SHALL NOT DRIVE, PARK TRUCKS OR STORE EQUIPMENT ON E 2ND STREET FROM STA. 10+00 TO 12+19.49 OR EAST OF STA. 13+39.92.

THE CONTRACTOR SHALL COORDINATE WITH THE CITY OF ROCK FALLS AND THE DISTRICT 2'S BORROW, USE AND WASTE COORDINATOR TO DETERMINE IF AND WHERE THE MATERIAL REMOVED FROM AVENUE A AND EAST 2ND STREET CAN BE RECYCLED.

FILE NAME = c:\pw_work\pwidot\hensonke\dms80258\D2848B2-sht-plan1.dgn	USER NAME = hensonke	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 20.0000 ' / in.	CHECKED -	REVISED -
	PLOT DATE = Tue Sep 27 14:09:14 2011	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

AVENUE A /2ND STREET

SCALE: | SHEET NO. OF SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
646	1B-2	WHITESIDE	257	79B
		CONTRACT NO.		
	ILLINOIS	FED. AID PROJECT		