

BETWEEN MEDIAN CROSSOVERS

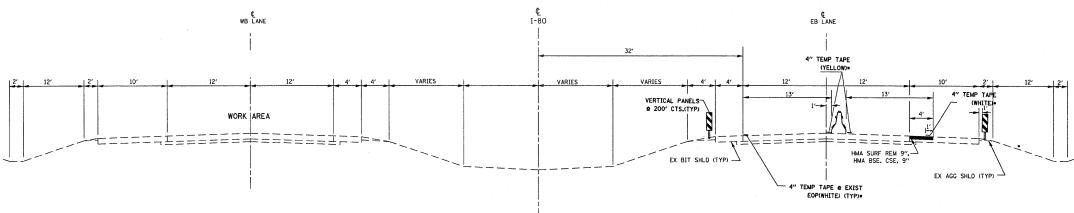

STAGE I **MAINLINE** STA 1184+12 TO 1334+89 (EXCEPT ACROSS BR AS SHOWN BELOW)

- 1. THE CONTRACTOR HAS THE OPTION OF USING EITHER THE LINE ON THE TEMPORARY CONCRETE BARRIER OR ON THE PAVEMENT.
- 2. THE COLOR OF THE REFLECTORS AND PAVEMENT/BARRIER MARKING LINE WILL VARY WITH STAGING AND SHALL MATCH THE EXISTING LINE IN THE WORK AREA.
- 3. THE COST OF THE REFLECTORS IS INCLUDED IN THE COST OF TEMPORARY CONCRETE BARRIER
- 4. FINAL SHOULDER RUMBLE STRIPS SHALL BE PLACED AFTER STAGE II COMPLETE

•WET TEMPORARY PAVEMENT MARKING TAPE TYPE III (REMOVE ALL EXIST PVT MK)

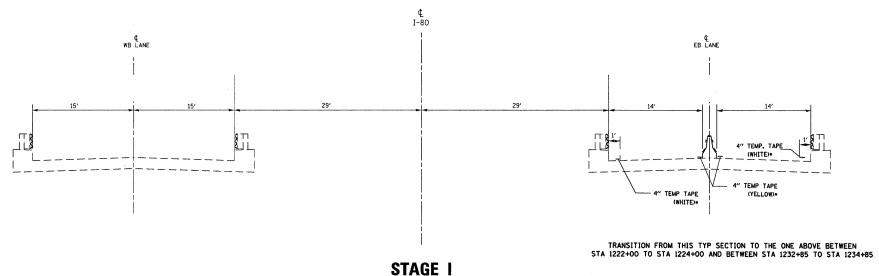

ACROSS SN 006-0022

NOTES:

- 1. THE CONTRACTOR HAS THE OPTION OF USING EITHER THE LINE ON THE TEMPORARY CONCRETE BARRIER OR ON THE PAVEMENT.
- THE COLOR OF THE REFLECTORS AND PAVEMENT/BARRIER MARKING LINE WILL VARY WITH STAGING AND SHALL MATCH THE EXISTING LINE IN THE WORK AREA.
- 3. THE COST OF THE REFLECTORS IS INCLUDED IN THE COST OF TEMPORARY
- 4. FINAL SHOULDER RUMBLE STRIPS SHALL BE PLACED AFTER STAGE II COMPLETE

•WET TEMPORARY PAVEMENT MARKING TAPE TYPE III (REMOVE ALL EXIST PVT MK)

FILE NAME =	USER NAME = braboypc	DESIGNED	REVISED			RTE SECTION COUNTY TOTAL SHEET
c:\pw_work\pwidot\braboypc\dØ212731\D36	686-sht-cover.dgn	DRAWN	REVISED	STATE OF ILLINOIS	STAGE I, TYPICAL SECTIONS	80 [(06-5)HBR-1,VBR:(06-6)]RS-3&I BUREAU 249 48
	PLOT SCALE = 55.0055 '/ in.	CHECKED	REVISED	DEPARTMENT OF TRANSPORTATION		CONTRACT NO. 66686
· ·	PLOT DATE = 9/21/2011	DATE	REVISED		SCALE; SHEET NO OF SHEETS STA TO STA	ILLINOIS FED. AID PROJECT