



GENERAL NOTES


1. THE GENERAL NOTES FOR STANDARD 606301 SHALL APPLY.
2. SECTION G-G SHALL BE THE SAME AS SHOWN ON STANDARD 606301.
3. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE FOOT (m²) FOR CONCRETE MEDIAN, TYPE SM (SPECIAL), INCLUDING THE COST OF FURNISHING AND INSTALLING THE DOWEL BARS, MORTAR FILLING, PAVEMENT FABRIC AND THE REMOVAL AND DISPOSAL OF THE EXISTING PAVEMENT FOR THE 14" x 14" (350 x 350) OPENING, IF REQUIRED, AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.
4. OPENINGS FOR SIGNS IN MEDIANS AND ISLANDS SHALL BE AS SHOWN OR AS DIRECTED BY THE ENGINEER.

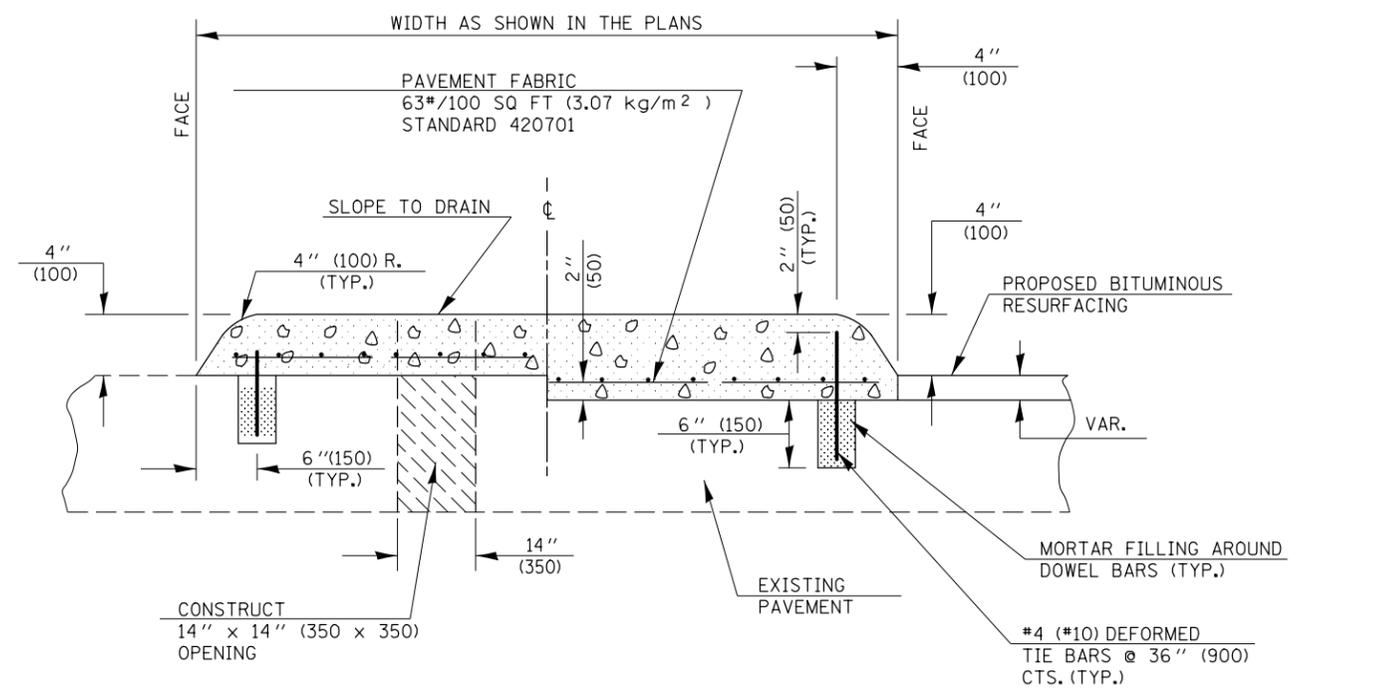

SECTION A-A

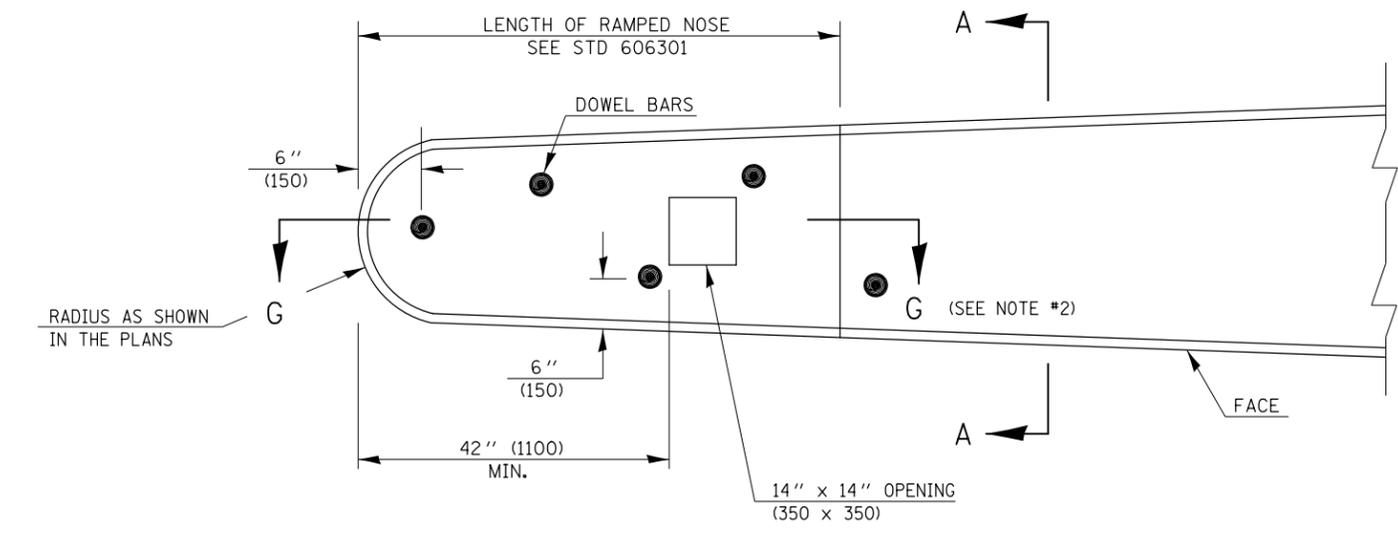

PLAN OF MEDIAN

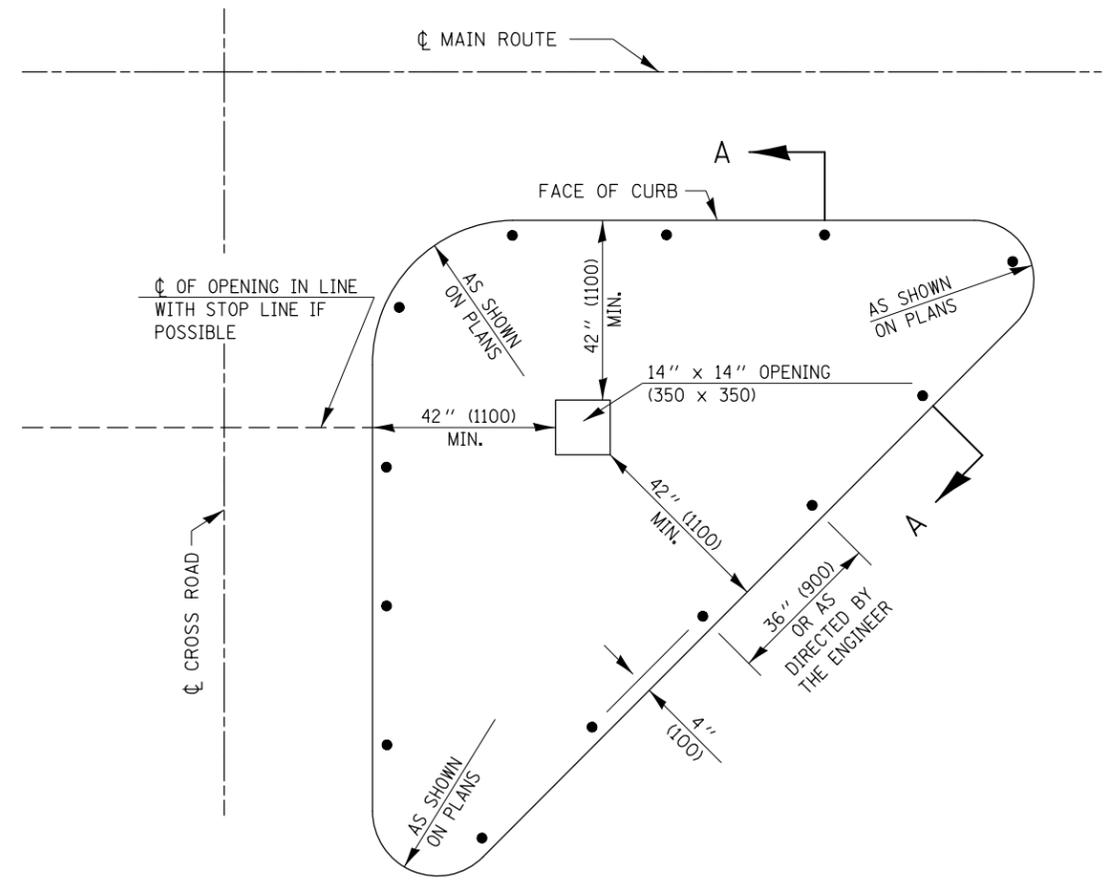

PLAN OF CORNER ISLAND

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = ppersonbr	DESIGNED -	REVISED - 11/06	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	CONCRETE MEDIAN, TYPE SM (SPECIAL)			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
ci:\pw\work\p\dot\personbr\d0184863\0570648-sh1-details.dgn		DRAWN -	REVISED -		SCALE:	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.	74	(57-23,57-24)RS-1	MCLEAN	175	167
		CHECKED -	REVISED -					CONTRACT NO. 70648					
		DATE -	REVISED -										
												FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT