



TEMPORARY HOT-MIX ASPHALT TRANSITIONS

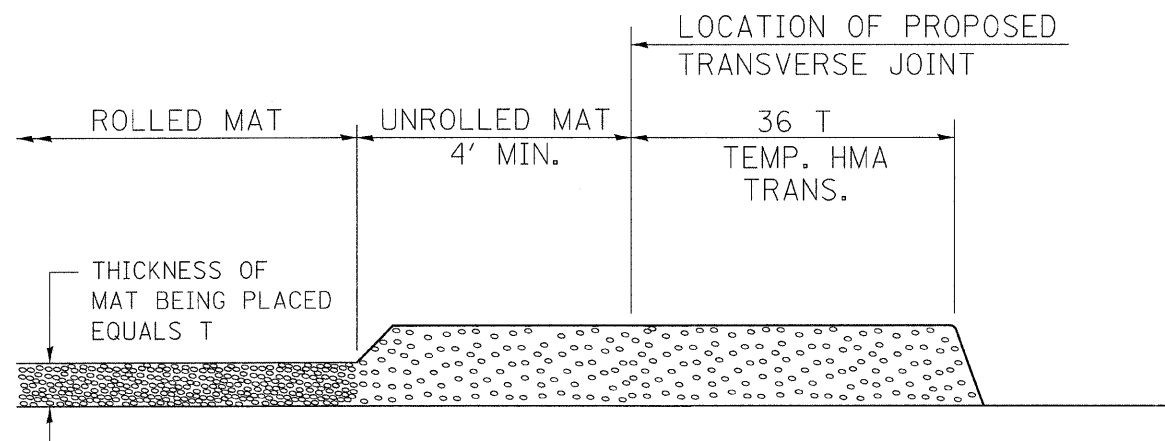


STEP I

1. PLACE HOT-MIX ASPHALT MAT, LENGTH 36 TIMES THE THICKNESS OF THE MAT BEING PLACED PAST THE PROPOSED TRANSVERSE JOINT LOCATION USING NORMAL OPERATING PROCEDURES.
2. EXTREME CARE SHOULD BE TAKEN TO MAINTAIN ENOUGH MATERIAL IN FRONT OF THE SCREED TO MAINTAIN REQUIRED PAVING DEPTH.

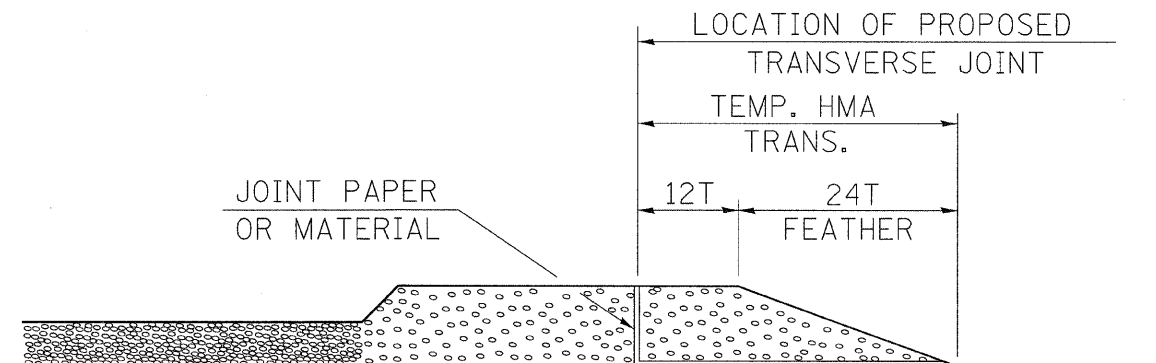


STEP III

1. JOINT PAPER OR OTHER PRESELECTED JOINT MATERIAL IS THEN PLACED IN THE CLEARED AREA AND THE EXCESS ASPHALT USED TO HAND FORM A TRANSITION TO THE DIMENSIONS SHOWN ABOVE.
2. NOTE THAT IN CONSTRUCTING THE TRANSITION, THE MAT DEPTH IS CONTINUED AS PART OF THE TRANSITION BEFORE FORMING THE FEATHER.

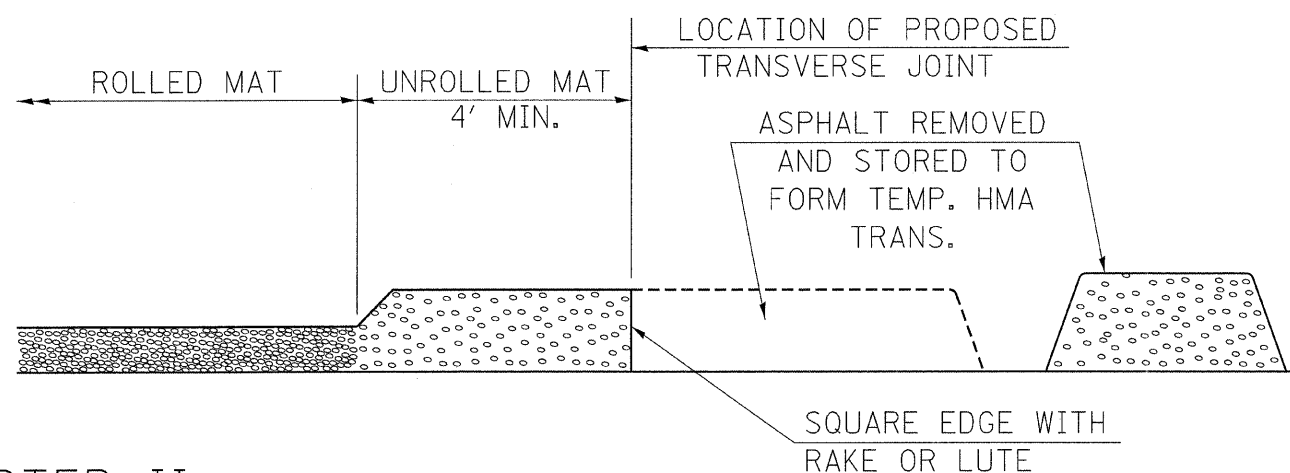

STEP II

1. MOVE THE PAVER OUT OF THE WAY AND REMOVE THE ASPHALT FROM THE AREA OF THE PROPOSED TEMPORARY HOT-MIX ASPHALT TRANSITION.
2. SQUARE UP THE END OF THE MAT WITH A RAKE OR LUTE.
3. NOTE THAT THE MAT WITHIN 4' OF THE END OF JOINT IS NOT TO BE ROLLED AT THIS TIME.

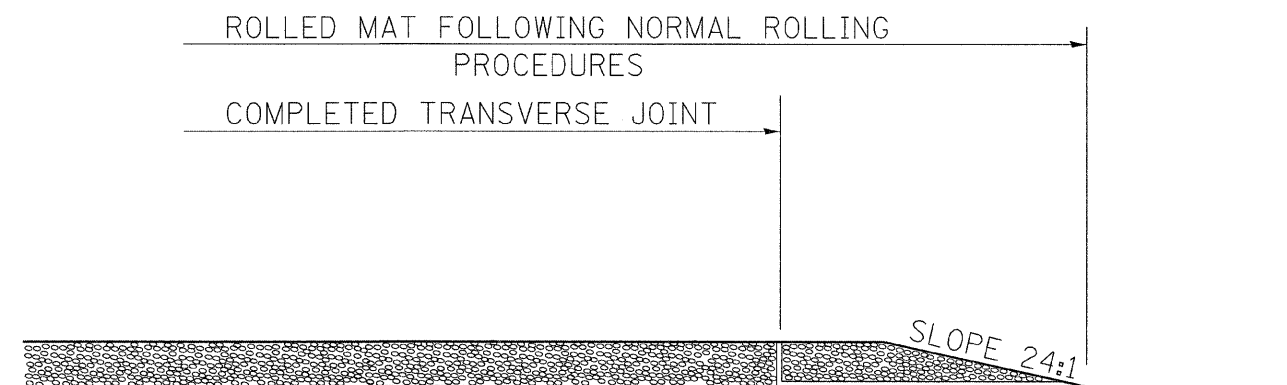

STEP IV

1. COMPLETE TEMPORARY TRANSITION BY ROLLING.
2. TO RESUME PAVING, AT THE JOINT, REMOVE TEMPORARY TRANSITION AND DISPOSE OF THE MATERIAL ACCORDING TO ART. 202.03 OF THE STD. SPECS. (COST INCLUDED IN THE CONTRACT).
3. CONSTRUCTING THE TEMPORARY TRANSITIONS WILL NOT BE PAID FOR SEPARATELY IN ACCORDANCE WITH ARTICLE 406.14 OF THE STANDARD SPECIFICATIONS.

REVISIONS	
REDRAWN	2-15-89
REVISED	8-16-94
REVISED	01-09-07
RESIZED	05-8-08

STD. 9-26

FILE NAME = 290148-slt-standards-d9.dgn	USER NAME =	DESIGNED - L.F.S.	REVISED -
HAMPTON, LENZINI AND RENWICK, INC.		DRAWN - T.W.K.	REVISED -
3085 STEVENSON DRIVE, SUITE 201		CHECKED - J.W.F.	REVISED -
SPRINGFIELD, ILLINOIS 62703	PLOT SCALE =	DATE - 04/05/11	REVISED -
ILLINOIS PROFESSIONAL DESIGN FIRM	PLOT DATE = 7/13/2011		
LS / PE / SE CORP. 184.000989			

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

STANDARD DETAILS DISTRICT 9
US ROUTE 45

SCALE: SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
328	105B-1	WHITE	54	21
CONTRACT NO. 78161				
ILLINOIS FED. AID PROJECT				