


SEEDING & MULCHING

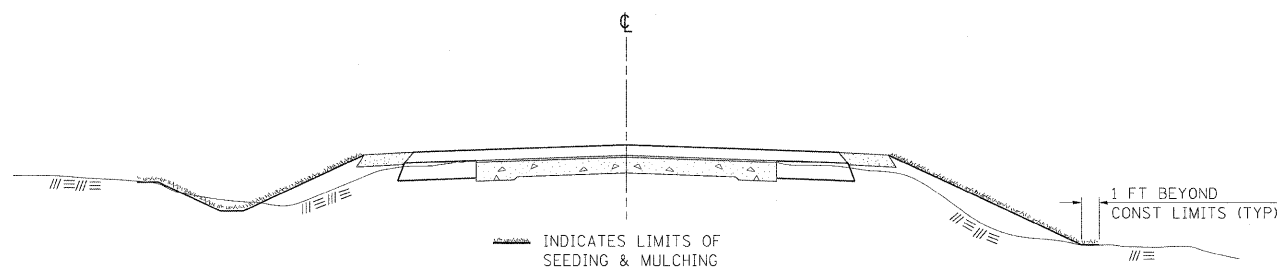

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CONSTRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.


THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIMESTONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

STD. 9-12

REVISIONS	
REDRAWN	2-15-89
REVISED	8-15-94
REVISED	6-3-99
REVISED	

TYPICAL CROSS SECTION SHOWING STEP CONSTRUCTION ON EXISTING FILL

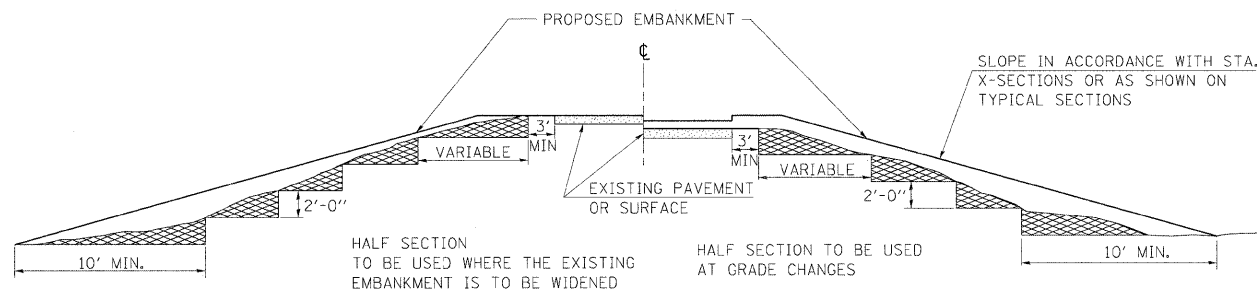


MATERIAL TO BE REMOVED AND REPLACED IN THE EMBANKMENT IN ACCORDANCE WITH ART. 205.04 OF THE STANDARD SPECIFICATION. COST TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED BECAUSE OF THIS WORK.

STD. 9-16

REVISIONS	
REDRAWN	2-15-89
REVISED	8-15-94
CHECKED	6-3-99
REVISED	

BUTT JOINT

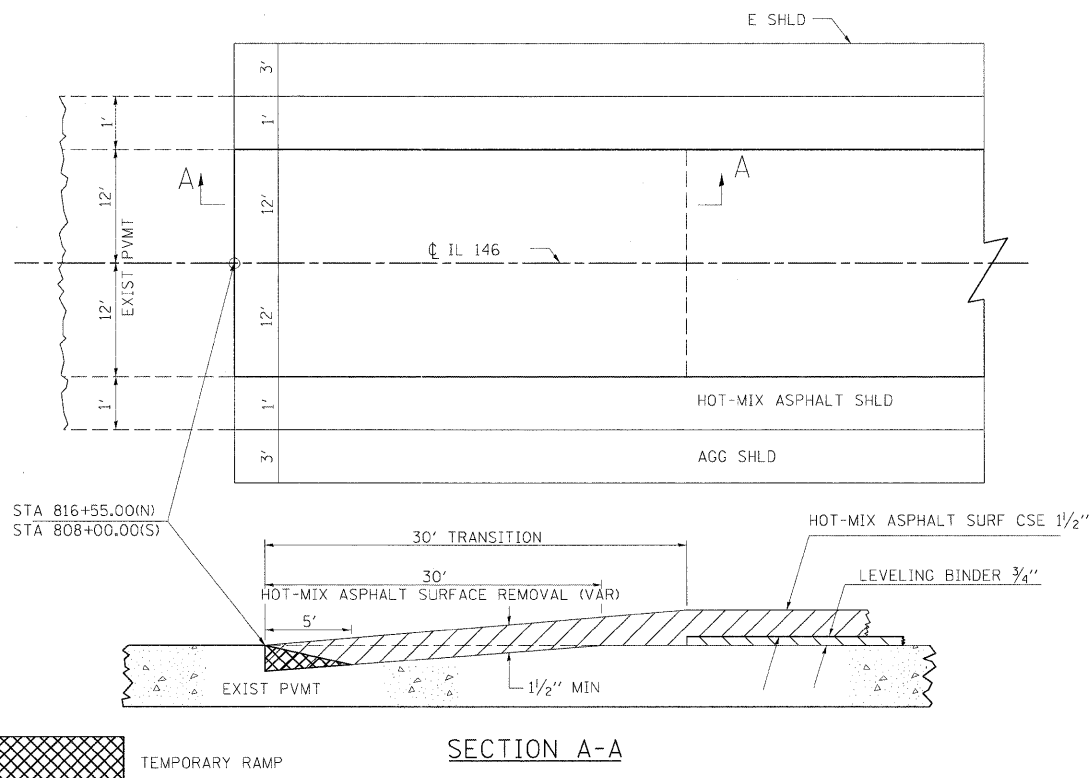

REVISIONS	
DRAWN	10-17-90
REVISED	01-11-07
REVISED	
REVISED	

STD. 9-86

LAYOUT	BKC	2/7/11
DRAWN	BKC	2/7/11
REVIEWED	MH	1/28/11

FILE NAME =	USER NAME = cox01203	DESIGNED - BKC	REVISED -
ca:\working\cox01203\dms24019\0978164-sh-standards.dgn		DRAWN - BKC	REVISED -
MODEL = Standards - 1	PLOT SCALE = 1,0000' / in.	CHECKED - MH	REVISED -
	PLOT DATE = 06/30/2011	DATE - 04/29/11	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

IL-145 (OVER BAY CREEK DITCH) STANDARDS

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
132	103BR-1	POPE	38	13
CONTRACT NO. 78164				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				