


SEEDING & MULCHING

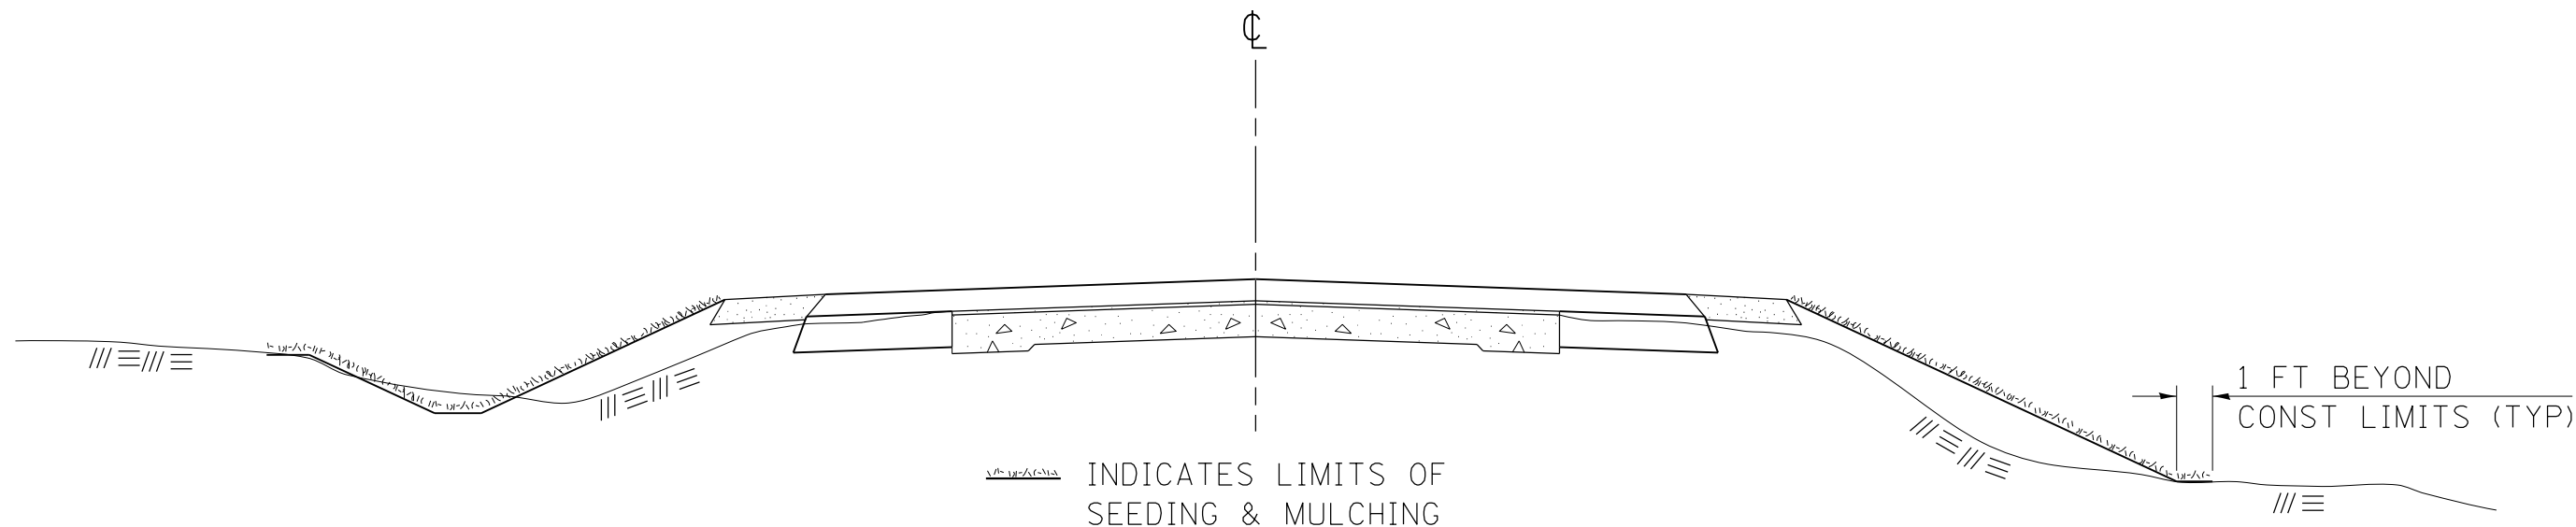

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CONSTRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIMESTONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

| REVISIONS | |
|-----------|---------|
| REDRAWN | 2-15-89 |
| REVISED | 8-15-94 |
| REVISED | 6-3-99 |
| REVISED | 3-27-08 |

STD. 9-12

FILE NAME = D978210-sht-detail.dgn
 MODEL = Default
 PLOT DRIVER = IODT_PDF.plt



| | | |
|------------------------------------|------------|-----------|
| USER NAME = twalker | DESIGNED - | REVISED - |
| FILE NAME = D978210-sht-detail.dgn | DRAWN - | REVISED - |
| PLOT SCALE = 40.00000' / in. | CHECKED - | REVISED - |
| PLOT DATE = 5/29/2014 | DATE - | REVISED - |

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SEEDING AND MULCHING DETAIL

SCALE: N.T.S. SHEET NO. 1 OF 1 SHEETS STA. TO STA.

| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---------------------------|---------|-----------|--------------|-----------|
| 849 | 113B-1 | JEFFERSON | 36 | 20 |
| CONTRACT NO. 78210 | | | | |
| ILLINOIS FED. AID PROJECT | | | | |