

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 RTR 2026	VARIOUS	2	1
		ILLINOIS	CONTRACT NO. 64U94	


01-16-2026 LETTING ITEM 041

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

PROPOSED  
HIGHWAY PLANS


VARIOUS ROUTES  
SECTION D2 RTR 2026  
ROADSIDE TURF REPAIR  
VARIOUS COUNTIES

C-92-119-25

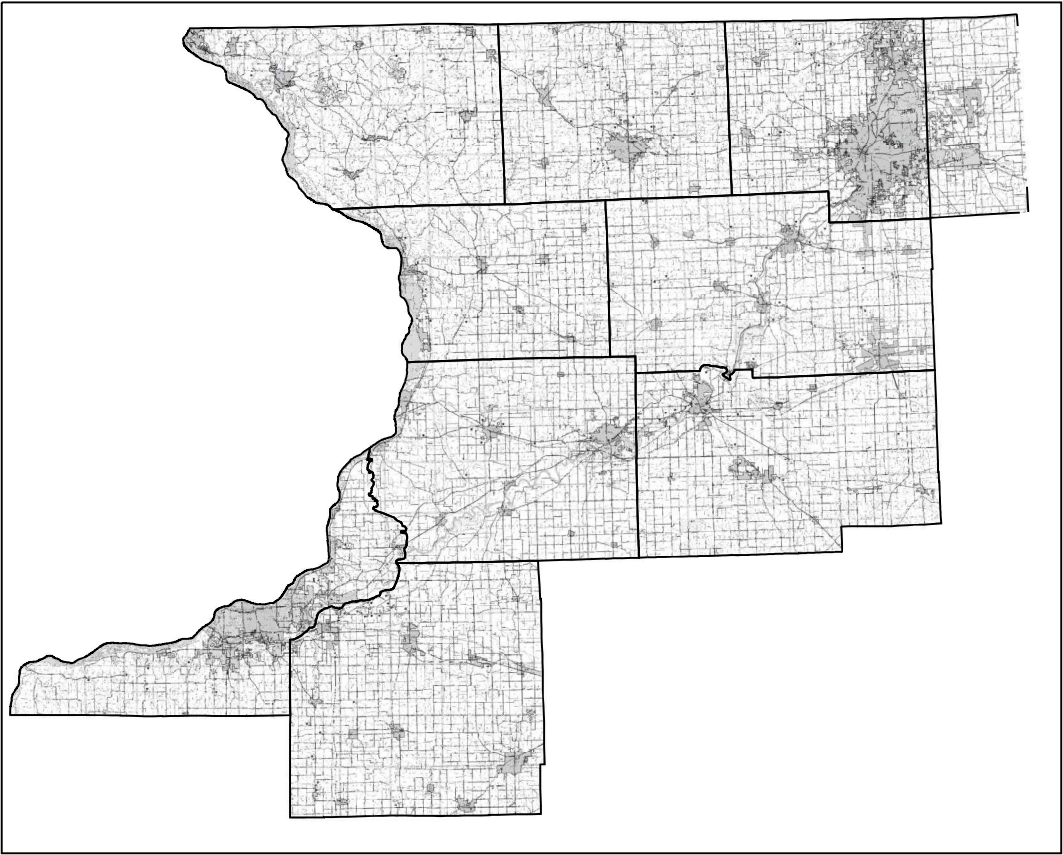

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

CONTRACT NO. 64U94

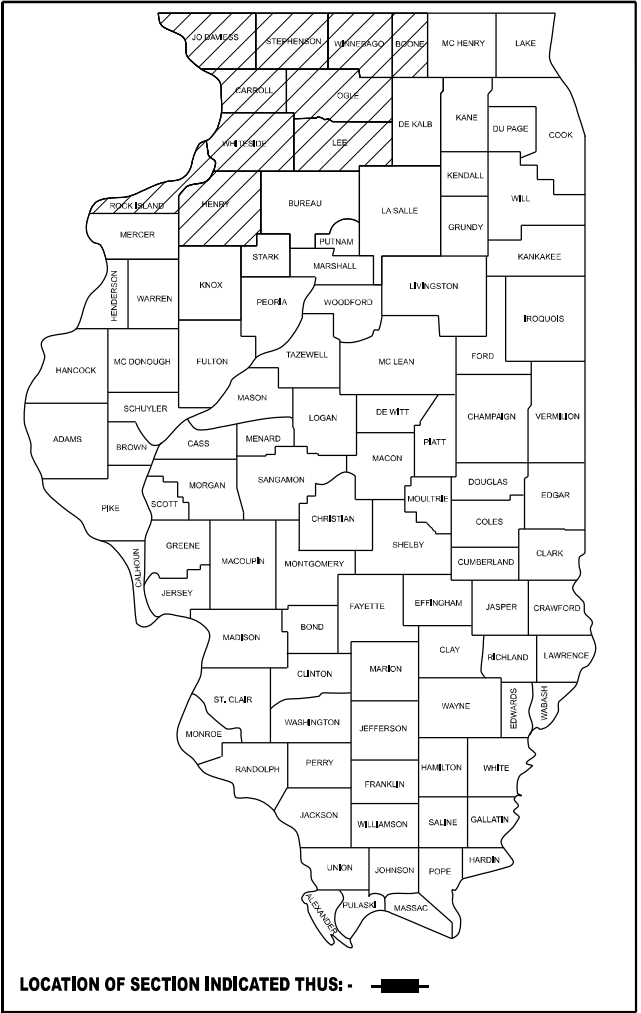

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED    October 9    20 25

*Julia Thompson*  
REGIONAL ENGINEER

December 5    20 25

*Scott A. [Signature]*  
ENGINEER OF DESIGN AND ENVIRONMENT

December 5    20 25

*[Signature]*  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

- 1COVER SHEET
- 2INDEX OF SHEETS, GENERAL NOTES, SUMMARY OF QUANTITIES

GENERAL NOTES

THE PURPOSE OF THIS CONTRACT IS TO REPAIR MOTORIST CAUSED TURF DAMAGE AT VARIOUS LOCATIONS THROUGHOUT THE COUNTIES. THESE INDIVIDUAL REPAIR LOCATIONS MAY VARY IN SIZE FROM APPROXIMATELY 40 TO 1,000 SQUARE YARDS. ALL LABOR EQUIPMENT, AND MATERIALS REQUIRED TO MAKE THESE TURF REPAIRS WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER ACRE FOR SEEDING (SPECIAL).

THE FINAL TOP 4 INCHES OF SOIL IN ANY RIGHT-OF-WAY AREA DISTRIBUTED BY THE CONTRACTOR MUST BE A COHESIVE SOIL CAPABLE OF SUPPORTING VEGETATION.

IDOT IS NOT A MEMBER OF JULIE, IF YOU ARE NEAR ANY OVERHEAD LIGHTING, INTERSECTION LIGHTING OR TRAFFIC SIGNALS, CONTACT THE IDOT TRAFFIC OFFICE AT 815-284-5469 AT LEAST 48 HOURS PRIOR TO WORK.

ALL TRAFFIC CONTROL REQUIRED FOR THE ROADSIDE RESTORATION SHALL BE CONSIDERED INCLUDED IN THE CONTRACT UNIT PRICE PER ACRE FOR SEEDING (SPECIAL).

HIGHWAY STANDARDS

- 701006-05OFF-ROAD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
- 701101-05OFF-ROAD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
- 701201-05LANE CLOSURE, 2L, 2W DAY ONLY, FOR SPEEDS ≥ 45 MPH
- 701301-04LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701426-09LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS, FOR SPEEDS ≥ 45 MPH
- 701901-11TRAFFIC CONTROL DEVICES

SUMMARY OF QUANTITIES				CONSTRUCTION CODE	
				100% STATE	100% STATE
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	SAFETY	SAFETY
				0021	0021
				MCHD	CONTR. MAINT.
67100100	MOBILIZATION	L SUM	1	0.67	0.33
K1005421	SEEDING (SPECIAL)	ACRE	4	2.5	1.5

MODEL D2 SHI INDEX  
FILE NAME: p:\1005\pr-bnley\con\PW\DOT\Documents\IDOT Office\Bids\bid 210RD Project\Operations\Maintenance Section\Office\21MCHD\Operations\Contract Maintenance\FY 2026\64U94 - Turf Repair\CAD Sheets\64U94 - 1002 - Index Sheet & SOO.dgn