

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	VARIOUS	ST. CLAIR	18	1
		ILLINOIS	CONTRACT NO. 76U46	

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED
HIGHWAY PLANS

VARIOUS ROUTES
SECTION DIST 8 BDS 2026-1
BRIDGE DECK SEALING
ST. CLAIR COUNTY

C-98-104-25

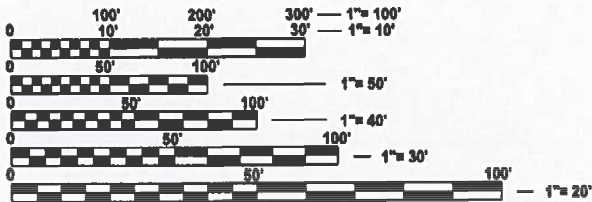


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER : CHERYL KEPLAR
PROJECT MANAGER : BRANDON HUMPHREYS

CONTRACT NO. 76U46

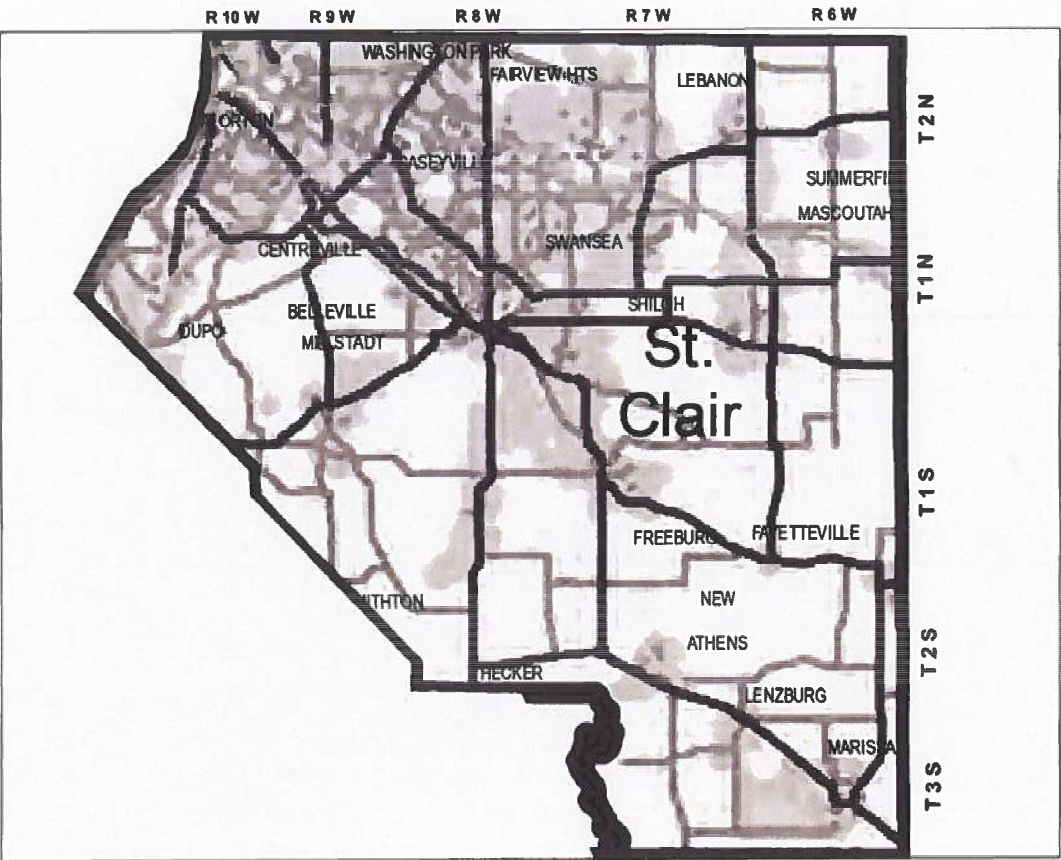

NOT TO SCALE



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Dec 23 2025 [Signature]
REGIONAL ENGINEER

December 5, 2025
[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

December 5, 2025
[Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

1. COVER SHEET
2. INDEX OF SHEETS, STANDARDS, GENERAL NOTES, AND COMMITMENTS
3. SUMMARY OF QUANTITIES
4. ADT SCHDULE
- 5-8. SCHEDULE OF QUANTITIES
- 9-18. LOCTION MAPS

GENERAL NOTES

1. NO SURVEY WAS PERFORMED FOR THIS PROJECT AND THE PLANS WERE CREATED USING MICROFILM AND FIELD MEASUREMENTS.
2. THE RESIDENT ENGINEER SHALL VERIFY THE EXISTENCE OF HIGHWAY LIGHTING, INTELLIGENT TRANSPORTATION SYSTEMS (I.T.S.) UTILITIES, AND/OR ELECTRICAL CABLES ASSOCIATED WITH TRAFFIC SIGNALS WITHIN THE PROJECT LIMITS. IF ANY OF THESE EXIST WITHIN THE PROJECT LIMITS, AND IF THESE ITEMS REQUIRE LOCATING, THE CONTRACTOR SHALL BE DIRECTED TO DO SO ACCORDING TO SECTION 803 OF THE STANDARD SPECIFICATIONS. THIS WORK SHALL BE PAID FOR ACCORDING TO ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS.
3. THE DEPARTMENT STRONGLY ENCOURAGES THE PRIME CONTRACTOR AND THEIR APPROVED SUB-CONTRACTORS TO HIRE MINORITY, WOMEN AND DISADVANTAGED INDIVIDUALS FROM ITS FEDERALLY FUNDED HIGHWAY CONSTRUCTION CAREERS TRAINING PROGRAM (HCCTP) TO HELP MEET WORKFORCE AND TRAINEE GOALS. THIS PROGRAM IS TRAINING MINORITIES, WOMEN AND DISADVANTAGED INDIVIDUALS IN HIGHWAY CONSTRUCTION-RELATED SKILLS, E.G., MATH FOR THE TRADES, JOB READINESS, TECHNICAL SKILLS COURSEWORK (CARPENTRY, CONCRETE FLATWORK, BLUEPRINT READING, SITE PLANS, SITE WORK, TOOLS USE, ETC.) AND OSHA 10 HOUR CERTIFICATION, TO PREPARE THEM FOR A CAREER IN THE HIGHWAY CONSTRUCTION TRADES. GRADUATES ARE WELL-TRAINED AND READY TO BECOME PRODUCTIVE ENTRY-LEVEL CONSTRUCTION WORKERS. CONTACT THE DISTRICT 8 EEO OFFICE AT 618-346-3360 AND/OR THE HCCTP COORDINATOR AT 618-874-6528 TO LEARN MORE ABOUT THE PROGRAM AND FOR ASSISTANCE IN MEETING WORKFORCE AND TRAINEE GOALS.
4. ALL TURF AREAS DISTURBED BY THE CONTRACTOR SHALL BE SEEDED WITH THE APPROPRIATE EROSION CONTROL, AS DIRECTED BY THE ENGINEER, AT THE CONTRACTOR'S EXPENSE.
5. COVERING OF EXISTING PAVEMENT MARKINGS AS NOTED IN THE BRIDGE DECK CONCRETE SEALER SPECIAL PROVISION SHALL INCLUDE RAISED REFLECTIVE PAVEMENT MARKERS.
6. SOME OF THE HIGHWAY STANDARDS LISTED ON THIS SHEET MAY NOT BE REFERENCED IN THE PLAN SCHEDULES. HOWEVER, THESE STANDARDS MAY BE UTILIZED AS NECESSARY TO MEET THE TRAFFIC CONTROL PLANS AS DIRECTED BY THE ENGINEER. COST SHALL BE INCLUDED IN TRAFFIC CONTROL AND PROTECTION (SPECIAL).
7. PEAK HOURS SHALL BE FOLLOWED WHEN WORKING ON STRUCTURES BELOW, SEE SPECIALPROVISION FOR PEAK HOURS.

082-0041	082-0043	082-0044
082-0047	082-0048	082-0087
082-0088	082-0287	082-0288
082-0297	082-0298	082-0312
082-0313	082-0318	082-0319
082-0322	082-0324	

HIGHWAY STANDARDS

000001-09	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
701201-05	LANE CLOSURE, 2L 2W, DAY ONLY, FOR SPEEDS > 45 MPH
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701411-09	LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS > 45 MPH
701421-08	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS > 45 MPH TO 55 MPH
701428-01	TRAFFIC CONTROL SETUP AND REMOVAL FREEWAY/EXPRESSWAY
701446-11	TWO LANE CLOSURE, FREEWAY/EXPRESSWAY
701451-05	RAMP CLOSURE FREEWAY/EXPRESSWAY
701456-05	PARTIAL EXIT RAMP CLOSURE, FREEWAY/EXPRESSWAY
701501-06	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
701601-09	URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NO TRAVERSABLE MEDIAN
701602-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT
701606-10	URBAN SINGLE LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701701-10	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701801-06	SIDEWALK, CORNER OR CROSSWALK CLOSURE
701901-11	TRAFFIC CONTROL DEVICES

COMMITMENTS

NONE

REV - MS

MODEL: General Note [Sheet]
FILE NAME: c:\pw_workspace\dlar\ee\jrd\091761\0876\U46-shh-gemnote.dgn

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS GENERAL NOTES, & COMMITMENTS			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	VARIOUS	ST. CLAIR	18	2
		CHECKED -	REVISED -					CONTRACT NO. 76U46				
	PLOT DATE = 10/17/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

MODEL: SOQ (Sheet)
FILE NAME: c:\p\work\pwt\illinois\m\1091761\0876\46-shit-SOQ.dgn

100% STATE					
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	BRIDGE	BRIDGE
				0047	0047
				RURAL	URBAN
67100100	MOBILIZATION	L SUM	1	0.15	0.85
X5870015	BRIDGE DECK CONCRETE SEALER	SQ FT	2479979	129956	2350023
X7010218	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	EACH	114	9	105

REV - MS

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	VARIOUS	ST. CLAIR	9	3
		CHECKED -	REVISED -					CONTRACT NO. 76U46				
	PLOT DATE = 10/15/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 1 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

MODEL - Traffic Data [Sheet]
FILE NAME - c:\pvt_work\pwt\tds\mainm\td1091761\0816\46-shit-traffic data.dgn

SN	2025 ADT	2045 ADT	MU	SU
082-0014	2100	2300	2.90%	3.40%
082-0033	11900	13500	1.50%	1.90%
082-0037	9600	11000	2.90%	7.80%
082-0038	9700	10700	6.80%	4.20%
082-0041	29000	32700	3.70%	4.00%
082-0043	11100	12500	4.10%	6.40%
082-0044	10600	12000	4.30%	4.80%
082-0047	10700	12200	4.80%	4.00%
082-0048	10100	11700	4.00%	4.50%
082-0049	6400	7300	5.60%	6.70%
082-0050	6300	7200	4.80%	4.80%
082-0053	6400	7300	5.60%	6.70%
082-0054	6300	7200	4.80%	4.80%
082-0072	3950	4550	4.90%	2.80%
082-0090	11700	13200	1.70%	9.10%
082-0091	14900	17100	0.50%	2.20%
082-0094	5000	5800	3.60%	5.10%
082-0095	5000	5800	3.60%	5.10%
082-0096	7500	8600	0.90%	2.00%
082-0097	7500	8600	0.90%	2.00%
082-0102	7700	8900	2.30%	1.10%
082-0103	7700	8900	1.10%	2.30%
082-0104	3200	3900	1.60%	4.40%
082-0109	8900	10000	2.00%	4.00%
082-0114	3300	3700	1.50%	4.90%
082-0115	7450	8400	1.10%	3.10%
082-0116	11700	13200	1.70%	9.10%
082-0117	6300	7200	4.80%	4.80%
082-0118	6400	7300	5.60%	6.70%
082-0119	6300	7200	4.80%	4.80%
082-0120	6400	7300	5.60%	6.70%
082-0135	10	10	0.00%	3.00%
082-0140	14800	16300	10.90%	2.60%
081-0141	3600	4000	3.50%	2.80%
082-0144	24400	27000	3.10%	4.10%
082-0146	850	950	7.10%	8.90%
082-0152	38300	41500	9.70%	2.90%
082-0154	38100	41300	10.60%	3.20%
082-0155	38300	41500	9.70%	2.90%
082-0156	38100	41300	10.60%	3.20%
082-0157	38300	41500	9.70%	2.90%
082-0158	38100	41300	10.60%	3.20%
082-0159	38300	41500	9.70%	2.90%
082-0160	38300	44100	3.10%	10.40%
082-0161	38500	44300	2.90%	9.60%
082-0162	73600	81300	10.40%	2.70%
082-0163	73600	81300	10.40%	2.70%
082-0164	73600	81300	10.40%	2.70%
082-0165	73600	81300	10.40%	2.70%
082-0169	33400	37600	10.60%	2.70%
082-0170	33400	37600	11.80%	2.90%
082-0182	5400	6200	1.50%	2.10%
082-0183	21200	24400	4.40%	3.60%
082-0184	21200	24400	4.40%	3.60%
082-0191	600	700	3.50%	8.70%
082-0199	4050	4700	10.00%	5.60%
082-0208	20800	23900	2.20%	1.40%
082-0212	6100	6800	1.30%	4.30%

SN	2025 ADT	2045 ADT	MU	SU
082-0213	3400	3900	4.70%	2.40%
082-0214	3400	3900	4.70%	2.40%
082-0232	44800	50500	13.10%	3.30%
082-0237	22800	25700	13.80%	3.30%
082-0238	22400	25200	12.20%	3.40%
082-0246	21300	23500	11.60%	2.80%
082-0249	22600	25000	12.50%	2.90%
082-0250	21300	23500	11.60%	2.80%
082-0254	18300	20200	10.70%	2.50%
082-0256	2300	2550	2.60%	3.90%
082-0259	14000	15700	4.50%	4.00%
082-0265	11600	13300	1.10%	2.40%
082-0272	5700	6500	2.30%	3.60%
082-0273	1400	1500	0.70%	5.20%
082-0278	19900	22900	0.50%	1.90%
082-0279	11400	12600	2.90%	2.90%
082-0280	14700	16900	5.30%	3.10%
082-0285	1600	1850	1.10%	6.30%
082-0286	11400	12600	2.90%	2.90%
082-0287	2700	3100	6.50%	10.00%
082-0288	900	1000	2.20%	5.60%
082-0290	7700	8900	1.10%	2.30%
082-0291	7300	8400	1.30%	2.80%
082-0293	1600	1800	27.40%	5.80%
082-0294	2450	2800	10.40%	7.10%
082-0296	7900	9100	3.80%	4.20%
082-0297	10600	12000	4.00%	4.80%
082-0298	10100	11400	4.50%	4.00%
082-0299	5900	6800	5.20%	7.30%
082-0300	6100	7100	12.40%	7.00%
082-0301	6100	7100	12.40%	7.00%
082-0303	10600	11800	1.90%	4.70%
082-0305	3600	4350	2.60%	6.60%
082-0312	14000	15100	13.30%	5.00%
082-0313	20000	21600	10.00%	5.30%
082-0314	1000	1300	30.00%	12.50%
082-0315	1600	2050	15.60%	9.40%
082-0318	14100	16200	5.00%	13.10%
082-0319	20200	23200	5.20%	9.90%
082-0322	14000	15100	13.30%	5.00%
082-0324	13500	14600	16.80%	3.20%
082-0326	4100	4500	10.90%	10.40%
082-0328	3000	3500	15.80%	18.30%
082-0329	3000	3500	15.80%	18.30%
082-0334	1000	1300	30.00%	12.50%
082-0335	1600	2050	15.60%	9.40%
082-0345	9300	10700	0.90%	2.50%
082-0349	2700	3000	10.40%	6.60%
082-0371	8000	9000	4.10%	1.10%
082-0374	3300	3600	2.20%	5.60%
082-0377	950	1050	5.30%	10.50%
082-0378	1250	1350	6.50%	7.30%
082-0385	1600	1800	6.90%	12.10%
082-0386	1600	1800	6.90%	12.10%
082-0387	1150	1300	4.30%	2.60%
082-0398	7900	9100	1.70%	2.40%
082-0399	9700	11100	2.40%	3.10%

STRUCTURE NO.	701201	701400	701406	701411	701421	701428	701446	701451	701456	701501	701601	701602	701606	701701	701801	701901	TC&P(SPECIAL) RURAL	TC&P(SPECIAL) URBAN
082-0014																		
082-0033					X													1
082-0037	X																	1
082-0038					X													1
082-0041					X													1
082-0043					X													1
082-0044					X													1
082-0047					X													1
082-0048					X													1
082-0049					X													1
082-0050					X													1
082-0053					X													1
082-0054					X													1
082-0072					X													1
082-0090					X				X									1
082-0091					X													1
082-0094	X																	1
082-0095	X																	1
082-0096											X							1
082-0097											X							1
082-0102					X													1
082-0103					X													1
082-0104	X																	1
082-0109	X																	1
082-0114	X																	1
082-0115									X									1
082-0116																		1
082-0117				X				X	X									1
082-0118				X				X	X									1
082-0119				X				X	X									1
082-0120				X				X	X									1
082-0135				X				X	X									1
082-0140		X	X			X		X										1
081-0141																		1
082-0144																		1
082-0146																		1
082-0152			X	X	X		X	X										1
082-0154		X	X			X	X											1
082-0155		X	X			X	X											1
082-0156		X	X			X	X											1
082-0157		X	X			X	X	X										1
082-0158		X	X			X	X											1
082-0159		X	X			X	X											1
082-0160		X	X	X		X	X											1
082-0161		X	X			X	X											1
082-0162		X	X	X		X	X											1
082-0163		X	X	X		X	X											1
082-0164		X	X			X	X											1
082-0165		X	X			X	X											1
082-0169		X	X			X	X	X										1
082-0170		X	X	X		X	X											1
082-0182										X								1
082-0183				X														1
082-0184				X														1
082-0191	X																	
																SUB TOTAL A	1	53

FILE NAME:	USER NAME = priyusha.ujoodha	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	VARIOUS	ST. CLAIR	18	5
		CHECKED -	REVISED -										
	PLOT DATE = 10/21/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 4 SHEETS	STA.	TO STA.	CONTRACT NO. 76U46			
											ILLINOIS	FED. AID PROJECT	

[illegible]

USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -	REVISED -						VAR	VARIOUS	ST. CLAIR	18	6
	CHECKED -	REVISED -		CONTRACT NO. 76U46								
PLOT DATE = 10/21/2025	DATE -	REVISED -		SCALE:	SHEET 2	OF 4	SHEETS	STA.	TO STA.			
				ILLINOIS FED. AID PROJECT								

MODEL: Schedule-1 (Sheet)
FILE NAME: c:\p\work\pilot\slm\m\1091761\08761\46-sh1-schedule.dgn

STRUCTURE NO.	BRIDGE RAIL TYPE	DECK			LEFT PARAPET			RIGHT PARAPET			MEDIAN	TOTAL AREA	
		LENGTH	WIDTH	AREA	LENGTH	WIDTH	AREA	LENGTH	WIDTH	AREA	PARAPET/CURB/SIDEWALK	URBAN	RURAL
		FOOT	FOOT	SQ FT	FOOT	FOOT	SQ FT	FOOT	FOOT	SQ FT	SQ FT	SQ FT	SQ FT
082-0014	CONCRETE PARAPET	75.6	57.5	4347	75.6	3.7	276.9	75.6	3.7	276.9		4900.8	
082-0033	CONCRETE PARAPET	51.8	33	1709.4	51.8	3.7	189.7	51.8	3.7	189.7		2088.8	
082-0037	CONCRETE PARAPET	147.2	35.7	5255.04	147.2	3.7	539.1	147.2	3.7	539.1		6333.3	
082-0038	CONCRETE PARAPET	990	59.2	58608	990.0	3.7	3625.9	990.0	3.7	3625.9		65859.8	
082-0041	CONCRETE PARAPET	320	71.1	22752	320.0	3.7	1172.0	320.0	3.7	1172.0	2344.00	27440.0	
082-0043	CONCRETE PARAPET	192.8	43.2	8328.96	192.8	3.7	706.1	192.8	3.7	706.1		9741.2	
082-0044	CONCRETE PARAPET	192.8	43.2	8328.96	192.8	3.7	706.1	192.8	3.7	706.1		9741.2	
082-0047	CONCRETE PARAPET	472	36	16992	472.0	3.7	1728.7	472.0	3.7	1728.7		20449.4	
082-0048	CONCRETE PARAPET	472	36	16992	472.0	3.7	1728.7	472.0	3.7	1728.7		20449.4	
082-0049	CONCRETE PARAPET	346	35.8	12386.8	346.0	3.7	1267.2	346.0	3.7	1267.2		14921.3	
082-0050	CONCRETE PARAPET	343	36	12348	343.0	3.7	1256.2	343.0	3.7	1256.2		14860.5	
082-0053	CONCRETE PARAPET	34	43.1	1465.4	34.0	3.7	124.5	34.0	3.7	124.5		1714.5	
082-0054	CONCRETE PARAPET	34	43.1	1465.4	34.0	3.7	124.5	34.0	3.5	119.0		1708.9	
082-0072	BRIDGE RAIL W/ CONCRETE CURB	98	36.7	3596.6	0.0	0.0	0.0	0.0	0.0	0.0			3596.6
082-0090	CONCRETE PARAPET	211	33.8	7131.8	211.0	3.7	772.8	211.0	3.7	772.8		8677.4	
082-0091	Sidewalk and Parapet with Fencing	184.6	85.6	15801.76	184.6	3.7	676.1	184.6	3.7	676.1	184.60	17338.6	
082-0094	CONCRETE PARAPET	125.8	35.2	4428.16	125.8	3.7	460.7	125.8	3.7	460.7		5349.6	
082-0095	CONCRETE PARAPET	311.4	35	10899	311.4	3.7	1140.5	311.4	3.7	1140.5		13180.0	
082-0096	GUARDRAIL	32	44.4	1420.8	0.0	0.0	0.0	0.0	0.0	0.0		1420.8	
082-0097	GUARDRAIL	32	44.4	1420.8	0.0	0.0	0.0	0.0	0.0	0.0		1420.8	
082-0102	CONCRETE PARAPET	127.1	43.1	5478.01	127.1	3.7	465.5	124.3	3.5	435.1		6378.6	
082-0103	CONCRETE PARAPET	127.1	43.1	5478.01	127.1	3.7	465.5	127.1	3.7	465.5		6409.0	
082-0104	CONCRETE PARAPET	118	35.2	4153.6	118.0	3.7	432.2	118.0	3.7	432.2			5018.0
082-0109	CONCRETE PARAPET	302	36	10872	302.0	3.7	1106.1	302.0	3.7	1106.1		13084.2	
082-0114	GUARDRAIL	32	32.7	1046.4	32.0	3.7	117.2	32.0	3.7	117.2		1280.8	
082-0115	CONCRETE PARAPET	230.7	55.8	12873.06	230.7	3.7	844.9	230.7	3.7	844.9		14562.9	
082-0116	CONCRETE PARAPET	181.7	31.8	5778.06	181.7	3.7	672.3	181.7	3.7	672.3		7122.6	
082-0117	CONCRETE PARAPET	351.7	43.2	15193.44	351.7	3.7	1288.1	351.7	3.7	1288.1		17769.6	
082-0118	CONCRETE PARAPET	351.7	43.2	15193.44	351.7	3.7	1288.1	351.7	3.7	1288.1		17769.6	
082-0119	CONCRETE PARAPET	130.4	43.2	5633.28	130.4	3.7	477.6	130.4	3.7	477.6		6588.5	
082-0120	CONCRETE PARAPET	130.4	43.2	5633.28	130.4	3.7	477.6	130.4	3.7	477.6		6588.5	
082-0135	BRIDGE RAIL W/ CONCRETE CURB	139	59	8201	0.0	0.0	0.0	0.0	0.0	0.0	139.00	8340.0	
082-0140	CONCRETE PARAPET	180.5	62.7	11317.35	180.5	3.7	661.1	180.5	3.7	661.1		12639.5	
081-0141	CONCRETE PARAPET	4531	36	163116	4531.0	3.7	16594.8	4531.0	3.7	16594.8		196305.6	
082-0144	CONCRETE PARAPET	4444	36	159984	4444.0	3.7	16276.2	4444.0	3.7	16276.2		192536.3	
082-0146	CONCRETE PARAPET	567.9	132.6	75303.54	132.6	3.7	485.6	132.6	3.7	485.6		76274.8	
082-0152	CONCRETE PARAPET	140.4	61.3	8606.52	140.4	3.7	514.2	140.4	3.7	514.2		9635.0	
082-0154	CONCRETE PARAPET	176	49.3	8676.8	176.0	3.7	644.6	176.0	3.7	644.6		9966.0	
082-0155	CONCRETE PARAPET	176	49.5	8712	176.0	3.7	644.6	176.0	3.7	644.6		10001.2	
082-0156	CONCRETE PARAPET	272	48	13056	272.0	3.7	996.2	272.0	3.7	996.2		15048.4	
082-0157	CONCRETE PARAPET	272	50.8	13817.6	272.0	3.7	996.2	272.0	3.7	996.2		15810.0	
082-0158	CONCRETE PARAPET	176	48	8448	176.0	3.7	644.6	176.0	3.7	644.6		9737.2	
082-0159	CONCRETE PARAPET	176	48	8448	176.0	3.7	644.6	176.0	3.7	644.6		9737.2	
082-0160	CONCRETE PARAPET	183	54	9882	183.0	3.7	677.1	183.0	3.7	677.1		11236.2	
082-0161	CONCRETE PARAPET	178	54	9612	178.0	3.7	658.6	178.0	3.7	658.6		10929.2	
082-0162	CONCRETE PARAPET	486	49.3	23959.8	486.0	3.7	1780.0	486.0	3.7	1780.0		27519.8	
082-0163	CONCRETE PARAPET	486	42.5	20655	486.0	3.7	1780.0	486.0	3.7	1780.0		24215.0	
082-0164	CONCRETE PARAPET	109	56.4	6147.6	109.0	3.7	399.2	109.0	3.7	399.2		6946.0	
082-0165	CONCRETE PARAPET	109	56.4	6147.6	109.0	3.7	399.2	109.0	3.7	399.2		6946.0	
082-0169	CONCRETE PARAPET	111.3	137.6	15314.88	111.3	3.7	407.6	111.3	3.7	407.6	815.27	16945.4	
082-0170	CONCRETE PARAPET	111.3	104.6	11641.98	118.7	3.7	434.7	118.7	3.7	434.7		12511.5	
082-0182	CONCRETE PARAPET	197.2	46	9071.2	197.2	3.7	722.2	197.2	3.7	722.2		10515.7	
082-0183	CONCRETE PARAPET	177.4	54	9579.6	177.4	3.7	649.7	177.4	3.7	649.7		10879.1	
082-0184	CONCRETE PARAPET	177.4	54.0	9579.6	177.4	3.7	649.7	177.4	3.7	649.7		10879.1	
082-0191	CONCRETE PARAPET	180.2	38.0	6847.6	180.2	3.7	660.0	180.2	3.7	660.0			8167.6
082-0199	CONCRETE PARAPET	378.9	42.5	16103.25	378.9	3.7	1401.9	378.9	3.7	1401.9			18907.1
												1060704.5	35689.2
											SUBTOTAL (A)	1060704.5	35689.2

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 10/21/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULE OF QUANTITIES

SCALE: SHEET 3 OF 4 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	VARIOUS	ST. CLAIR	18	7
CONTRACT NO. 76U46				
ILLINOIS		FED. AID PROJECT		



I-255 AND I-64 AREA BRIDGES			
SN-082-0170	SN-082-0169	SN-082-0238	SN-082-0237
SN-082-0033	SN-082-0170	SN-082-0169	



IL 15 AND I-255 AREA BRIDGES	
SN-082-0259	SN-082-0232
SN-082-0212	SN-082-0114
SN-082-0041	



IL 163 SOUTH AREA BRIDGES	
SN-082-0104	SN-082-0305



MODEL: 0152 [Sheet]
FILE NAME: c:\p\p\work\p\work\slm\m\109176\10876\46-shl-locationmap.dgn

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 10/21/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LOCATION MAP CONTINUED

SCALE: SHEET 3 OF 10 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	VARIOUS	ST. CLAIR	18	11
CONTRACT NO. 76U46				
ILLINOIS FED. AID PROJECT				



IL 15 WEST BELLEVILLE	
SN- 082-0090	SN- 082-0115
SN- 082-0116	SN- 082-0109

MODEL: 0090 [Sheet]
FILE NAME: c:\p\work\p\work\slm\m\1091761\0876146-sht-locationmap.dgn

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 10/21/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LOCATION MAP CONTINUED LOCATION MAP			
SCALE:	SHEET 5	OF 10 SHEETS	STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	VARIOUS	ST. CLAIR	18	13
CONTRACT NO. 76U46				
ILLINOIS FED. AID PROJECT				

