

GENERAL NOTES

THE HMA SURFACE OF ALL MAILBOX TURNOUTS, PRIVATE ENTRANCES, COMMERCIAL ENTRANCES, AND SIDE ROADS SHALL BE MADE NEATLY, IN A WORKMANLIKE MANNER AND SHALL ACCURATELY CONFORM TO THE SHAPES AND DIMENSIONS SHOWN ON THE PLAN DETAILS. IF REQUIRED BY THE ENGINEER, THE CONTRACTOR SHALL SAW CUT THE HMA SURFACE TO CONFORM TO THE SHAPES AND DIMENSIONS SHOWN ON THE PLAN DETAILS. THIS WORK WILL BE INCLUDED IN THE COST OF THE HMA SURFACE.

THE ENGINEER WILL BE THE SOLE JUDGE CONCERNING CURING TIME FOR THE VARIOUS HMA LIFTS.

ON EXISTING PAVEMENT WHICH MAY BE SUPERELEVATED, THE NEW HOT-MIX ASPHALT PAVEMENT SHALL BE BUILT WITH THE SAME SUPERELEVATION UNLESS NEW SUPERELEVATION RATES ARE GIVEN ON THE PLANS.

THE FOLLOWING RATES OF APPLICATION HAVE BEEN USED IN CALCULATING QUANTITIES.

GRANULAR MATERIALS	2.05	TONS / CU YD
HMA RESURFACING	112	LBS / SQ YD / IN

COMMITMENTS

HOT-MIX ASPHALT MIXTURE REQUIREMENT TABLE			
LOCATION(S):	ENTIRE PROJECT MAINLINE	ENTIRE PROJECT SIDE RD'S / ENTRANCES	ENTIRE PROJECT MAINLINE
MIXTURE USE(S):	HMA BINDER LIFT 2¾"	INCIDENTAL HMA SURFACE VARIABLE LIFT	POLYMER HMA SURFACE 1½" LIFT
BINDER GRADE (PG):	PG64-22	SBS PG70-28	SBS PG70-28
DESIGN AIR VOIDS:	4.0% @ N50	4.0% @ N50	4.0% @ N50
MIXTURE COMPOSITION: (MIXTRURE GRADATION)	IL-19.0	IL-9.5	IL-9.5
FRICTION AGGREGATE:		MIX "C"	MIX "C"
MIXTURE WEIGHT:	112.0 LB/SY/IN	112.0 LB/SY/IN	112.0 LB/SY/IN
QUALITY MANAGEMENT PROGRAM:	QC/QA	QC/QA	QC/QA
SUBLOT SIZE:	N/A	N/A	N/A
DENSITY TEST METHOD:	NUCLEAR / CORES	SATISFACTION OF THE ENGINEER	NUCLEAR / CORES
MATERIAL TRANSFER DEVICE (REQUIRED)	NO	NO	NO

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE
AS BUILT INFORMATION

SUPERVISING CONSTRUCTION FIELD ENGINEER

RESIDENT ENGINEER / TECHNICIAN

START & END DATES
OF CONSTRUCTION:

INSPECTORS:

MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\dd1120960\0366r83.dgn

	USER NAME: Donald Woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -					80	(06, 50-8)RS-3	LAS / BUR	11	2
		CHECKED - JS	REVISED -					CONTRACT NO. 66T13				
	PLOT DATE: 8/4/2025	DATE - 6/10/2025	REVISED -		SCALE:	SHEET 1 OF 1 SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT				

MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\rd1120960\0366f83.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
				80%/20% FED/ST BUREAU COUNTY	80%/20% FED/ST LASALLE COUNTY
				ROADWAY	ROADWAY
				0005 URBAN	0005 URBAN
20200100	EARTH EXCAVATION	CU YD	110		110
35102400	AGGREGATE BASE COURSE, TYPE B 12"	SQ YD	170		170
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	78	9	69
40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	4154	2340	1814
40600990	TEMPORARY RAMP	SQ YD	785	51	734
40603080	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	TON	2743	1570	1173
40604150	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX "C", N50	TON	1496	856	640
40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	102	32	70
44000166	HOT-MIX ASPHALT SURFACE REMOVAL, 4 1/4"	SQ YD	7352		7352
48102100	AGGREGATE WEDGE SHOULDER, TYPE B	TON	30		30
67100100	MOBILIZATION	L SUM	1	0.5	0.5
70100460	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	L SUM	1	0.5	0.5
* 78001130	PAINT PAVEMENT MARKING - LINE 6"	FOOT	1810	1050	760
X4400104	SURFACE REMOVAL (SPECIAL)	SQ YD	10411	10249	162


*SPECIALITY ITEMS

	USER NAME	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES		F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	Wood,Woodshank	DRAWN - RW	REVISED -				80	(06, 50-8)RS-3	LAS / BUR	11	3
		CHECKED - JS	REVISED -				CONTRACT NO. 66T13				
	PLOT DATE 8/4/2025	DATE - 6/10/2025	REVISED -				SCALE:	SHEET 1 OF 1 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT


MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\rd1120860\0366f83.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
				80%/20% FED/ST BUREAU COUNTY	80%/20% FED/ST LASALLE COUNTY
				ROADWAY	ROADWAY
				0005	0005
				URBAN	URBAN
X7200061	TEMPORARY INFORMATION SIGNING	SQ FT	21		21


	USER NAME: Wood,woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -					80	(06, 50-8)RS-3	LAS / BUR	11	4
		CHECKED - JS	REVISED -					CONTRACT NO. 66T13				
	PLOT DATE 8/4/2025	DATE - 6/10/2025	REVISED -		SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

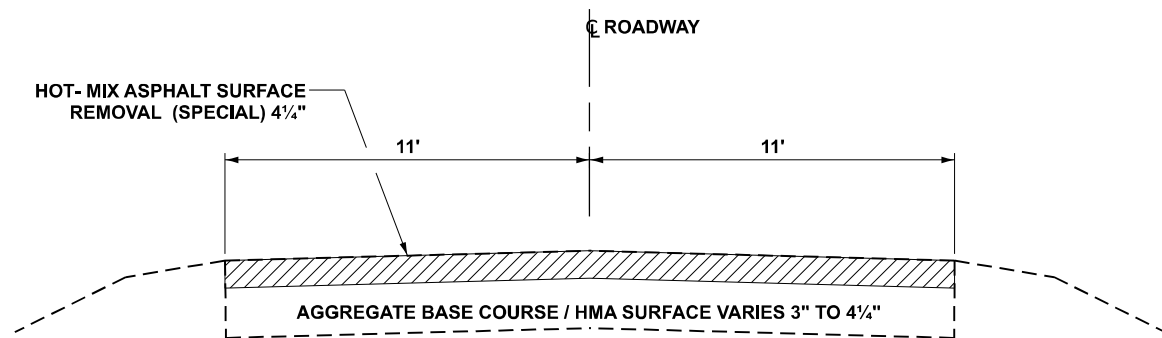


EXISTING TYPICAL SECTION 1
L. M. 0.00 TO L.M. 0.79
BUREAU COUNTY

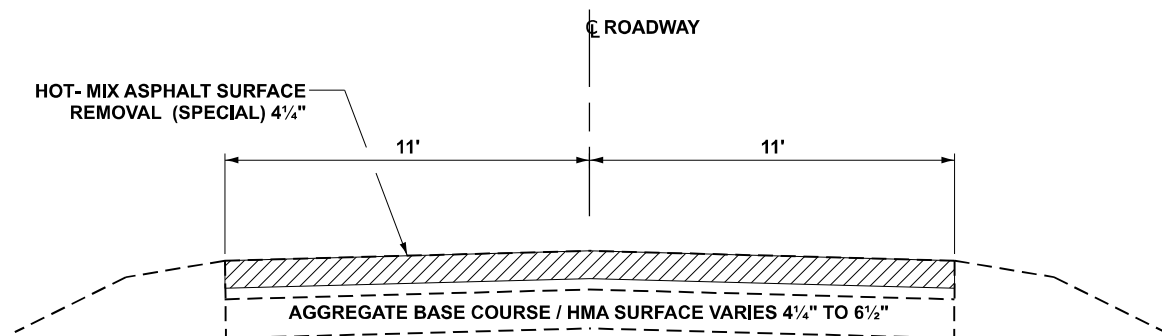


EXISTING TYPICAL SECTION 2
L. M. 0.79 TO L.M. 1.12
LASALLE COUNTY

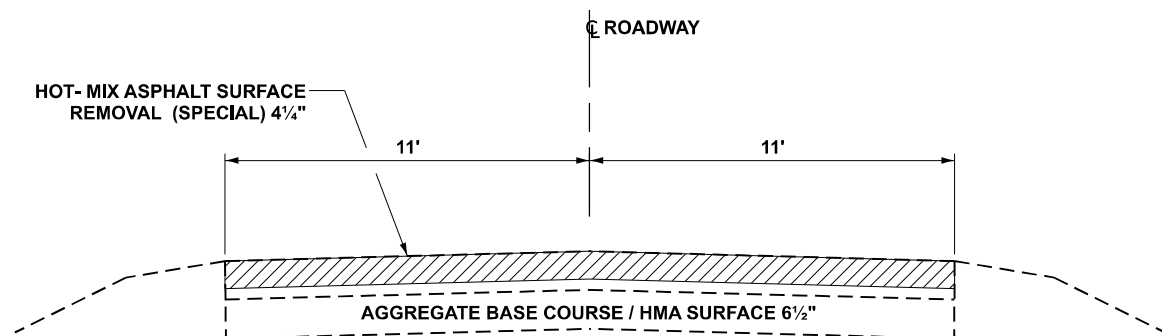


EXISTING TYPICAL SECTION 3
L. M. 1.12 TO L.M. 1.25
LASALLE COUNTY

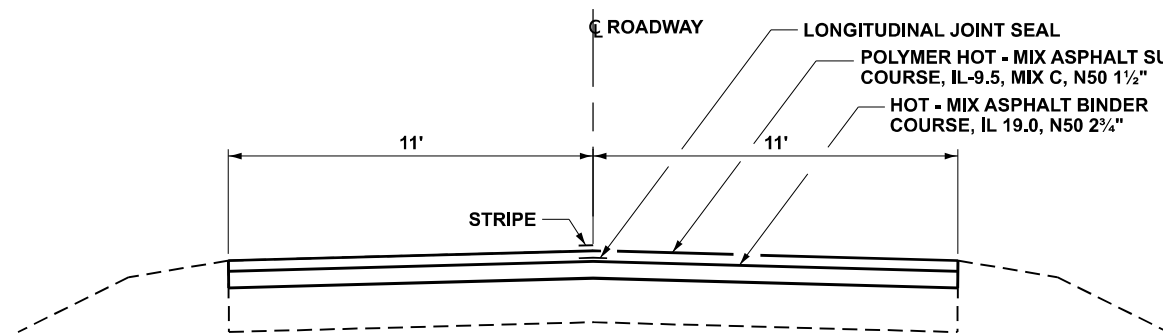

PROPOSED TYPICAL SECTION 1
L. M. 0.00 TO L.M. 0.79
BUREAU COUNTY

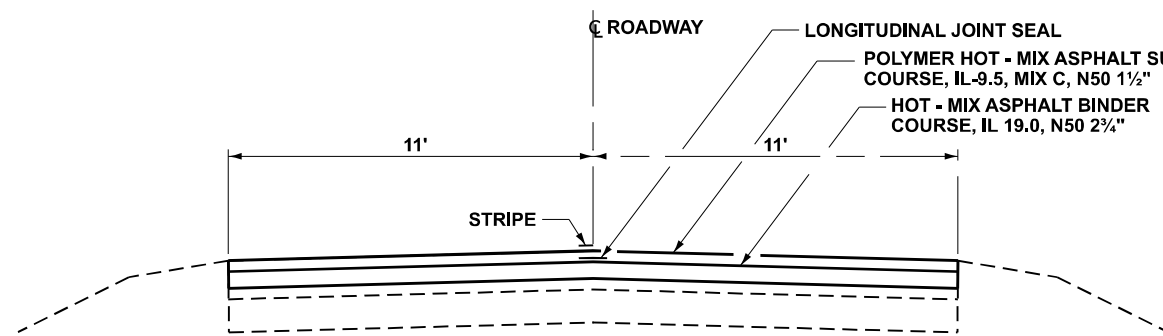

PROPOSED TYPICAL SECTION 2
L. M. 0.79 TO L.M. 1.12
LASALLE COUNTY

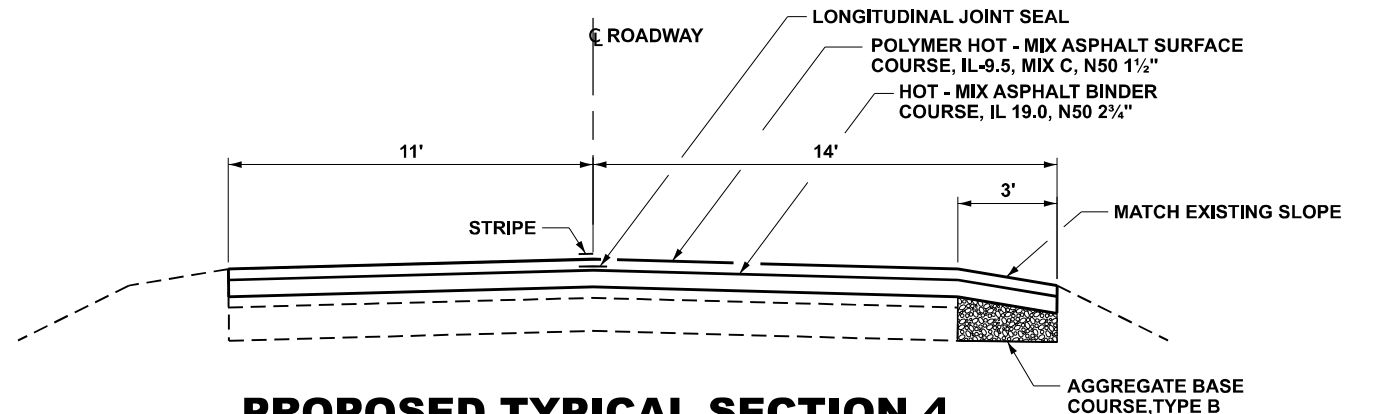

PROPOSED TYPICAL SECTION 4
L. M. 1.12 TO L.M. 1.25
LASALLE COUNTY

MODEL: Default
FILE NAME: c:\pw_work\pwidollwoodshank\1150608\0386T13.dgn


USER NAME: Donald Woodshank	DESIGNED - RW	REVISED -
	DRAWN - RW	REVISED -
	CHECKED - JS	REVISED -
PLOT DATE: 8/22/2025	DATE - 6/10/2025	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


TYPICAL SECTIONS

SCALE: SHEET 1 OF 2 SHEETS STA. TO STA.


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	(06, 50-8)RS-3	LAS / BUR	11	5
CONTRACT NO. 66T13				
ILLINOIS FED. AID PROJECT				

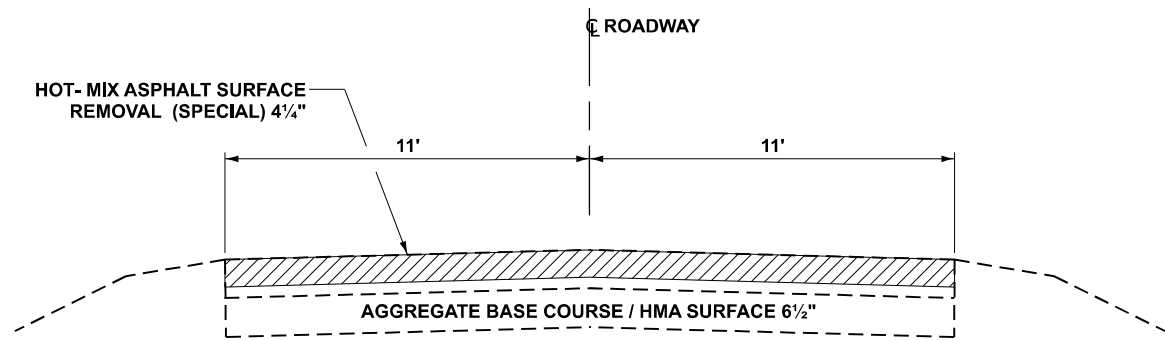


EXISTING TYPICAL SECTION 5
L. M. 1.25 TO L.M. 1.355
LASALLE COUNTY

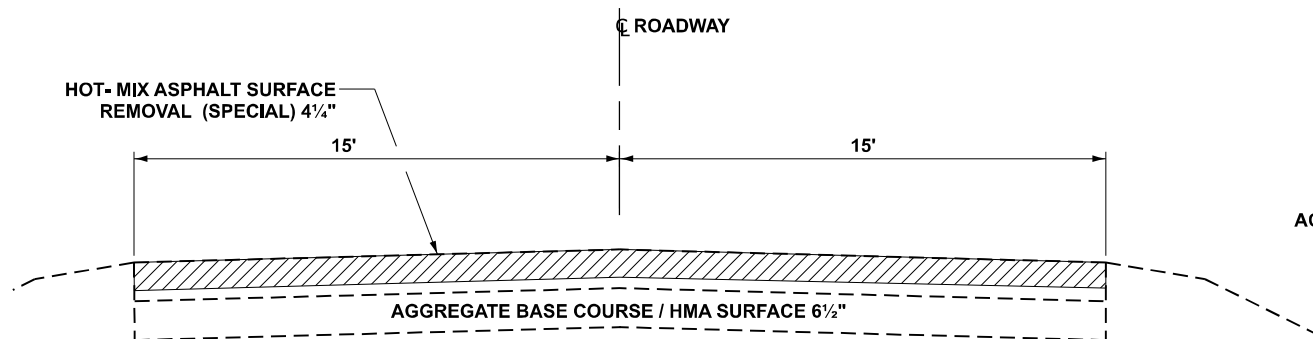

EXISTING TYPICAL SECTION 6
L. M. 1.355 TO L.M. 1.36
LASALLE COUNTY

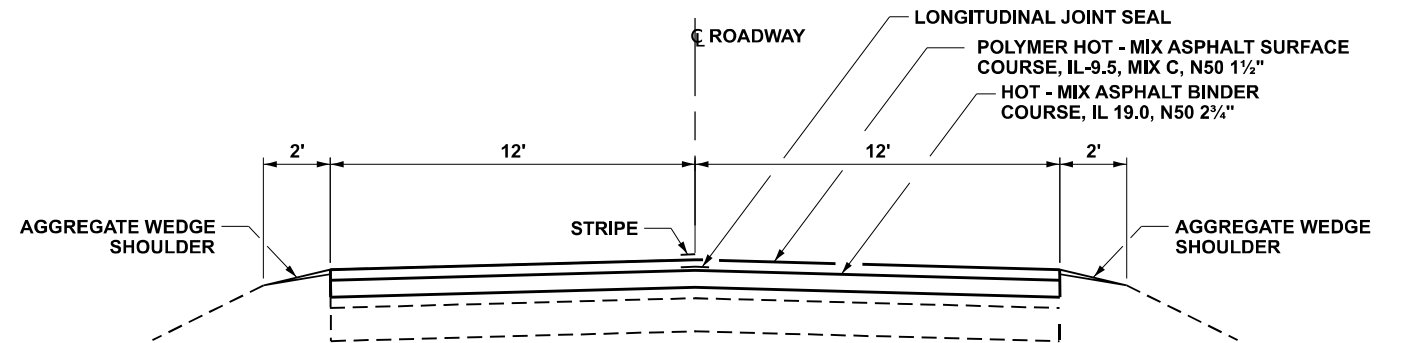

PROPOSED TYPICAL SECTION 5
L. M. 1.25 TO L.M. 1.355
LASALLE COUNTY

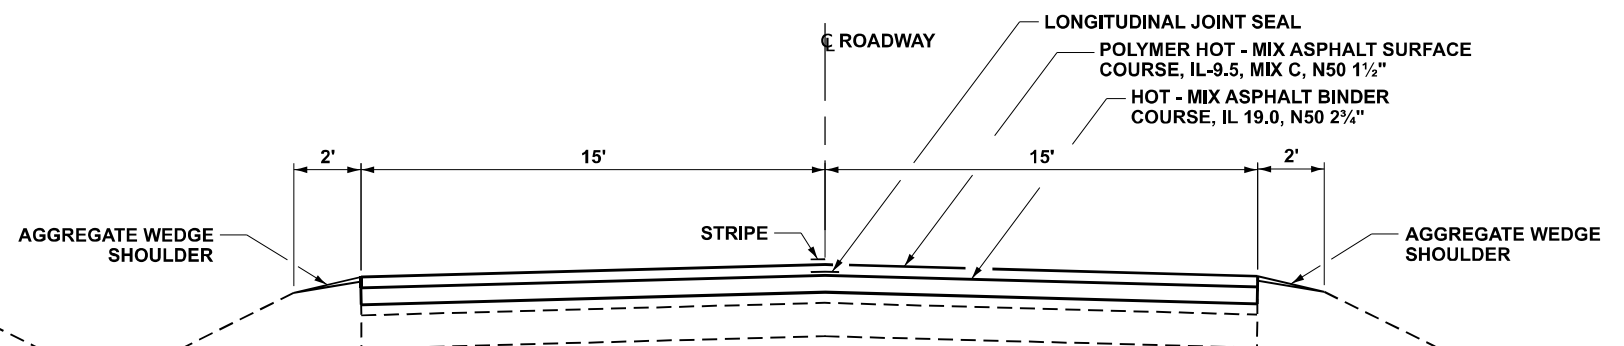

PROPOSED SECTION 6
L. M. 1.355 TO L.M. 1.36
LASALLE COUNTY

MODEL: Default
FILE NAME: c:\pw_work\pw\lidl\woodshank\lidl150608\0366T13.dgn

PLOT DATE 8/22/2025	USER NAME: Ronald Woodshank	DESIGNED - RW	REVISED -
		DRAWN - RW	REVISED -
		CHECKED - JS	REVISED -
		DATE - 6/10/2025	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

SCALE: SHEET 2 OF 2 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	(06, 50-8)RS-3	LAS / BUR	11	6
CONTRACT NO. 66T13				
ILLINOIS FED. AID PROJECT				

MAINLINE SCHEDULE - BUREAU COUNTY

LOCATION		LENGTH	WIDTH		AREA		SURFACE REMOVAL (SPECIAL)	HOT-MIX ASPHALT BINDER COURSE IL - 19.0 N 50	POLYMER HOT-MIX ASPHALT SURFACE COURSE IL - 9.5 MIX C N50	BITUMINOUS MATERIAL TACK COAT					
L.M.	L.M.	FOOT	FOOT	FOOT	RT.	SQ FT	LT.	RT.	LT.	RT.	LT.	RT.	LT.	RT.	
0.00	0.79	4171	11	11	45881	45881	5098	5098	785	785	428	428	1147	1147	
TOTALS								10196		1570		856		2294	

MODEL: Default
FILE NAME: c:\pw_work\pwidol\woodshank\120960\0366R83.dgn

MAINLINE SCHEDULE - LASALLE COUNTY

LOCATION		LENGTH	EARTH EXCAVATION WIDENING		AGGREGATE BASE COURSE TYPE B 12"		HOT-MIX ASPHALT SURFACE REMOVAL 4¼"		HOT-MIX ASPHALT BINDER COURSE IL - 19.0 N50		POLYMER HOT-MIX ASPHALT SURFACE COURSE IL - 9.5 MIX C N50		BITUMINOUS MATERIAL TACK COAT		AGGREGATE WEDGE SHOULDER TYPE B	
			LT.	RT.	LT.	RT.	LT.	RT.	LT.	RT.	LT.	RT.	LT.	RT.	LT.	RT.
			FOOT		CU YD		TON		SQ YD		TON		TON		POUND	
L.M.	L.M.															
0.79	1.12	1742							2129	2129	328	328	179	179	479	479
1.12	1.25	686		110		170			838	838	129	141	70	77	189	206
1.25	1.355	554							677	677	104	133	57	72	152	194
1.355	1.36	26							32	32	5	5	3	3	8	8
SUBTOTALS			0	110	0	170			3676	3676	566	607	309	331	828	887
TOTALS			110		170				7352		1173		640		1715	

SCHEDULE
PAVEMENT MARKING
LASALLE COUNTY

LOCATION		PAINT PAVEMENT MARKING LINE 6"	
		FOOT	
		YELLOW / SKIP DASH	
L.M.	L.M.		
LASALLE COUNTY - N. 30th RD.			
0.79	1.36	760	
TOTALS		760	

QUANTITY BASED ON 2 APPLICATIONS

ENTRANCE SCHEDULE - LASALLE COUNTY

LOCATION	TYPE	SIDE	EXISTING SURFACE MATERIAL	LENGTH	WIDTH		SURFACE REMOVAL (SPECIAL)	INCIDENTAL HOT-MIX ASPHALT SURFACE	BITUMINOUS MATERIAL TACK COAT	AGGREGATE SURFACE COURSE TYPE B
					FRONT	BACK				
					FOOT	FOOT				
L.M.							SQ YD	TON	POUND	TON
0.85	FE	LT	AGGREGATE	10	26	12	8	3	5	1
0.96	CE	LT	HOT-MIX ASPHALT	10	40	20	13	5	8	
1.01	PE	LT	HOT-MIX ASPHALT	10	20	12	7	3	4	
1.10	SR	LT	HOT-MIX ASPHALT	20	40	20	13	11	15	
1.15	CE	LT	CONCRETE				0			
1.16	CE	LT	AGGREGATE	10	40	35	17	7	9	7
1.25	CE	LT	HOT-MIX ASPHALT	10	100	60	36	14	20	
1.32	CE	LT	AGGREGATE	10	115	100	48	19	27	61
1.34	CE	LT	HOT-MIX ASPHALT	10	54	36	20	8	11	
TOTALS							162	70	99	69

SCHEDULE
TEMPORARY RAMP
LASALLE COUNTY

LOCATION	TEMPORARY RAMP	
	MILLING	BINDER
	SQ YD	
L.M.		
0.96	31	11
1.01	19	7
1.10	31	11
1.15	157	56
1.25	94	33
1.34	57	20
1.36	153	54
SUBTOTAL	542	192
TOTALS	734	

PLOT DATE 8/4/2025	USER NAME Ronald Woodshank	DESIGNED - RW	REVISED -
		DRAWN - RW	REVISED -
		CHECKED - JS	REVISED -
		DATE - 6/10/2025	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES
N. 30th RD. LASALLE COUNTY

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	(06, 50-8)RS-3	LAS / BUR	11	8
CONTRACT NO. 66T13				
ILLINOIS FED. AID PROJECT				



IMPROVEMENT BEGINS
DEAD END ON 1500 N. AVE.
L.M. 0.00

BUREAU / LASALLE COUNTY LINE
L.M. 0.79


IMPROVEMENT END
EXISTING CONSTRUCTION JOINT
±85' WEST OF PLANK RD.
ON N. 30th RD.
L.M. 1.36



ROADWAY PLAN

MODEL: Default
FILE NAME: c:\pw_work\pwidolwoodshank\120960\0366r83.dgn

	USER NAME Ronald Woodshank	DESIGNED - RW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	ROADWAY PLAN			F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - RW	REVISED -					80	(06, 50-8)RS-3	LAS / BUR	11	9
		CHECKED - JS	REVISED -					CONTRACT NO. 66T13				
	PLOT DATE 8/4/2025	DATE - 6/10/2025	REVISED -		SCALE:	SHEET 1	OF 1 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		


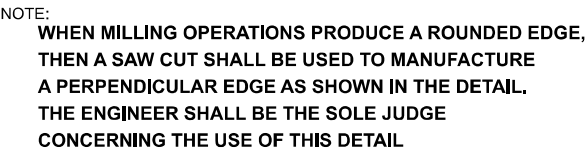


(DO NOT RESURFACE FIELD ENTRANCES)

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MISCELLANEOUS DETAILS

8)RS-3	LAS / BUR	11	10
--------	-----------	----	----

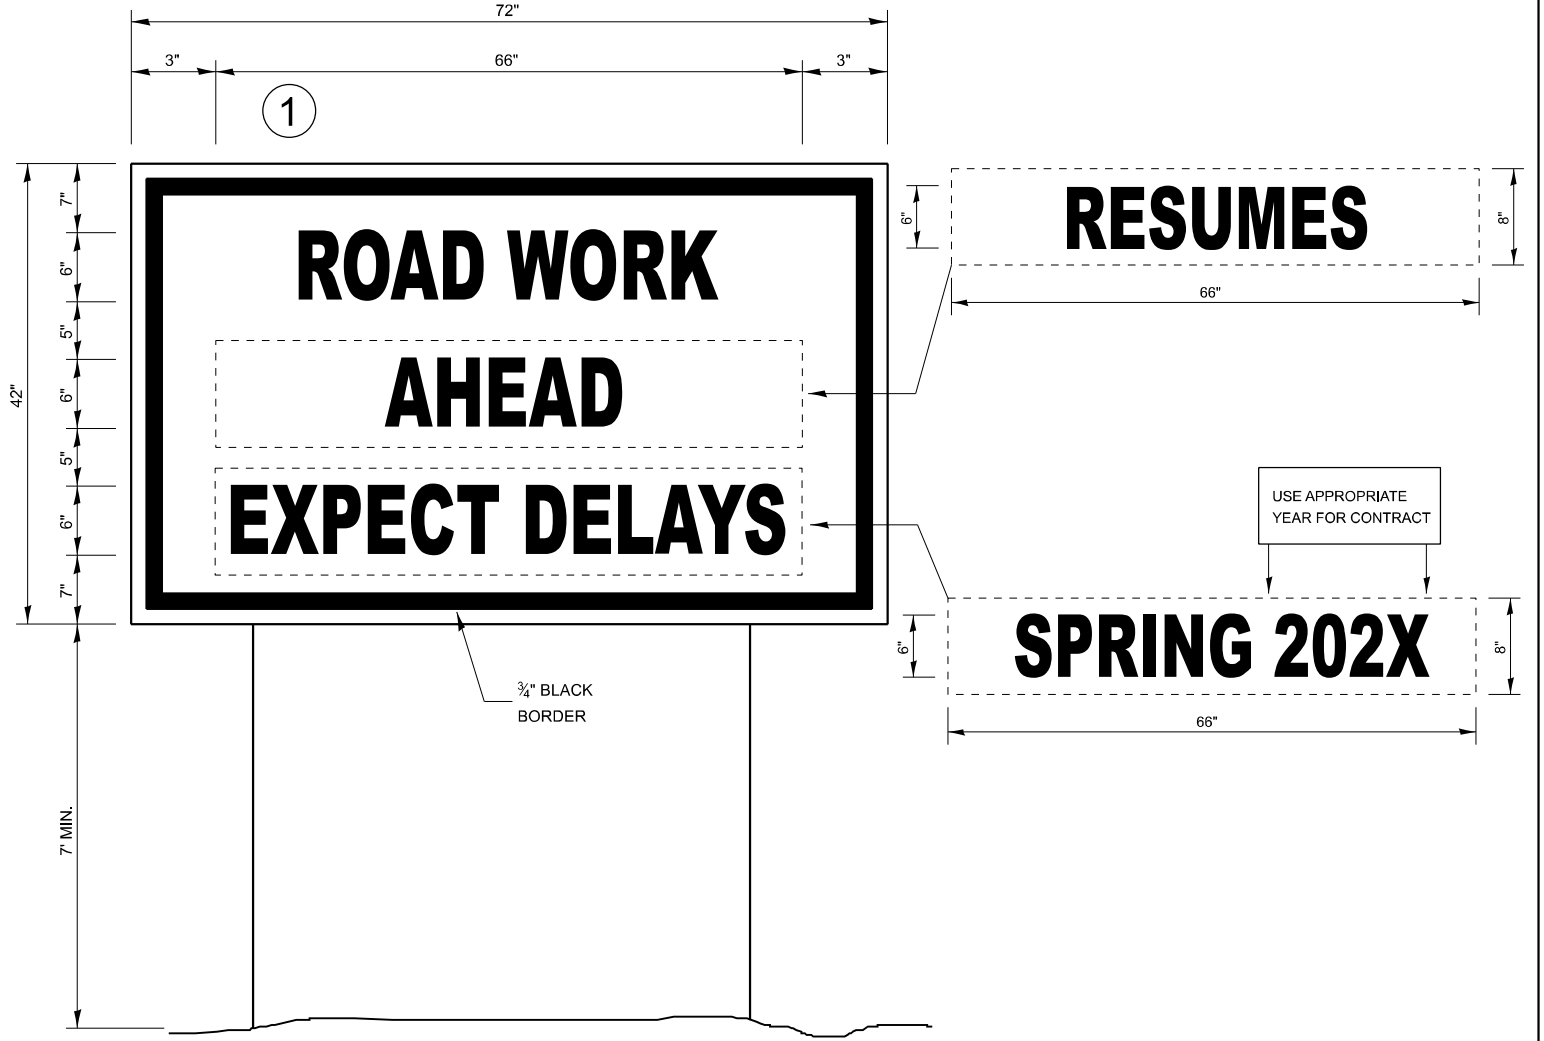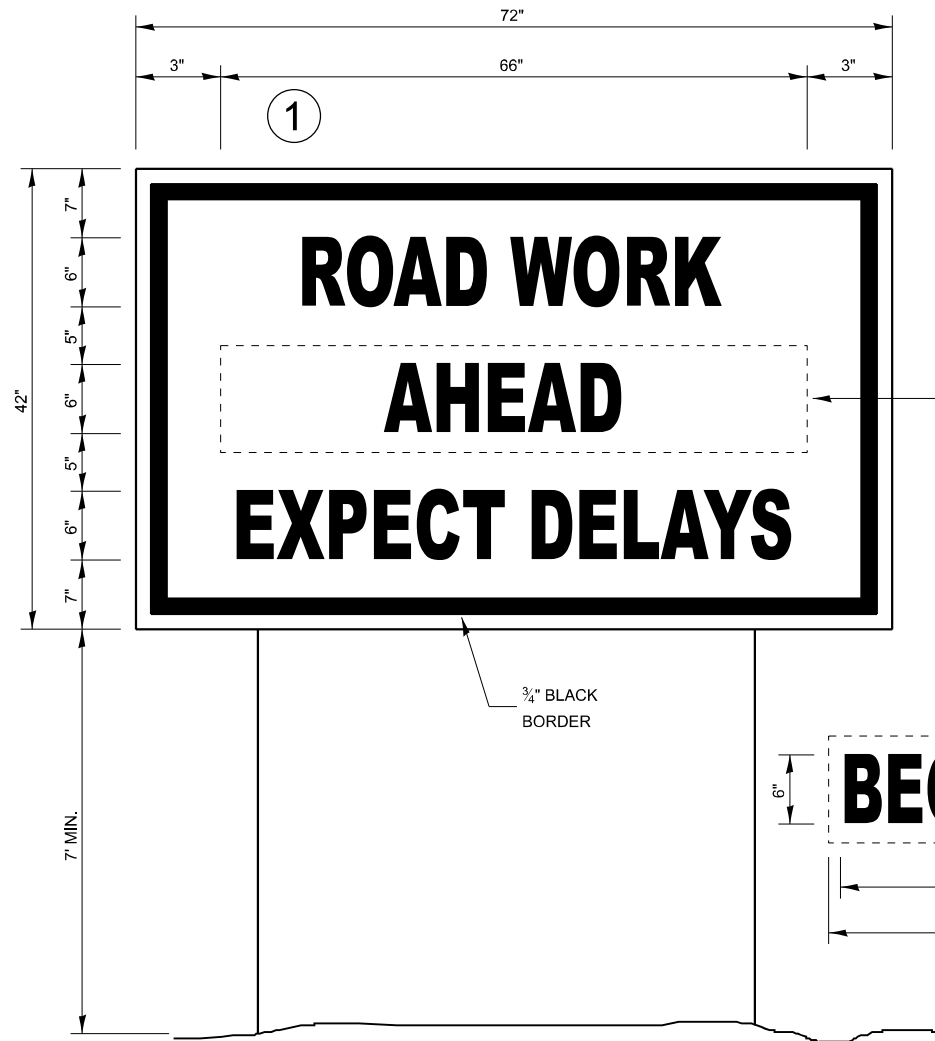

TEMPORARY INFORMATION SIGNING

NOTES:

- USE 6" D BLACK LETTERING ON FLOURESENT ORANGE BACKGROUND.
- ERECT SIGNS AT LOCATIONS IN ADVANCE OF THE "ROAD CONSTRUCTION AHEAD" SIGNS AS DIRECTED BY THE ENGINEER.
- ERECT SIGN①WITH INSTALLED PANEL②A MINIMUM OF ONE WEEK PRIOR TO THE START OF THE LANE CLOSURE.
- REMOVE PANEL②ON THAT DATE.
- SEE SPECIAL PROVISION "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
- WILL BE PAID FOR PER SQ FT AS "TEMPORARY INFORMATION SIGNING". EACH SIGN = 21 SQ FT

WINTER SHUT DOWN SIGNING

MODEL: Default
FILE NAME: c:\pw_work\pwid\woodshank\fd1120960\0366r83.dgn

USER NAME: Donald Woodshank	DESIGNED - RW	REVISED -
	DRAWN - RW	REVISED -
	CHECKED - JS	REVISED -
PLOT DATE: 8/4/2025	DATE - 6/10/2025	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY INFORMATION SIGNING

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	(06, 50-8)RS-3	LAS / BUR	11	11
CONTRACT NO. 66T13				
ILLINOIS FED. AID PROJECT				