


INDEX OF SHEETS

1. COVER SHEET
2. GENERAL NOTES, STANDARDS & COMMITMENTS
3. SUMMARY OF QUANTITIES
4. SCHEDULES
- 5.-7. LOCATION MAPS

BRIDGE STRUCTURE NUMBERS AND COUNTIES

CALHOUN	GREENE	JERSEY
0070019	0310003	0420001
0070020	0310005	0420003
0070021	0310006	0420004
0070022	0310012	0420013
0070023	0310015	0420023
0070024	0310016	0420024
0070025	0310032	0420025
0070026	0310033	0420026
0070027	0310034	0420027
0070028	0310035	0420041
	0310036	
	0310037	
	0310038	
	0310039	
	0310040	
	0310041	
	0310042	
	0310043	
	0310044	
	0310045	

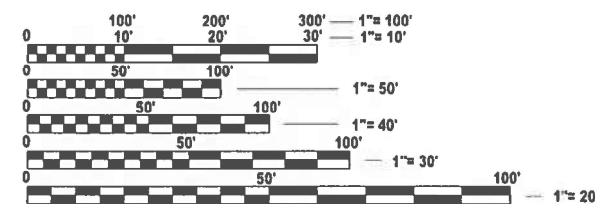

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER-CHERYL KEPLAR
PROJECT MANAGER-BRANDON HUMPHREYS

CONTRACT NO. 76U47

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROPOSED
HIGHWAY PLANS

VARIOUS ROUTES
SECTION DIST 8 BDS 2026-2

BRIDGE DECK SEALING
VARIOUS COUNTIES

C-98-105-25



GROSS LENGTH = x.xx FT. = x.xxx MILE
NET LENGTH = x.xx FT. = x.xxx MILE

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 BDS 2026-2	VARIOUS	7	1
ILLINOIS		CONTRACT NO. 76U47		

D-98-042-25



LOCATION OF SECTION INDICATED THUS: - [shaded area]

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Aug 21 2025
[Signature] REGIONAL ENGINEER
October 3 2025
[Signature] ENGINEER OF DESIGN AND ENVIRONMENT
October 3 2025
[Signature] DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

MODEL: General Notes [Sheet]
FILE NAME: c:\p\work\p\wid\ed\lewis\kald100317\087676\47-sh-gennote.dgn

- GENERAL NOTES
1.

THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS IN THE FIELD PRIOR TO CONSTRUCTION AND ORDERING OF MATERIALS.
2.

EXISTING PAVEMENT MARKINGS AND RPM'S SHALL BE TEMPORARILY COVERED PRIOR TO APPLICATION OF THE DECK SURFACE TREATMENT, TO PREVENT THE MATERIAL FROM BEING APPLIED TO THE MARKINGS AND TO PROTECT THE REFLECTIVE PROPERTIES OF THE MARKINGS. THE TEMPORARY COVERING MATERIAL USED SHALL BE SUCH THAT IT WILL NOT AFFECT THE MARKING'S REFLECTIVITY WHEN REMOVED AFTER APPLICATION OF THE DECK SURFACE TREATMENT AND PRIOR TO OPENING TO TRAFFIC. COST IS INCLUDED WITH THE (CONCRETE SEALER) DECK SURF ACE TREATMENT SPECIFIED
3.

NO OVERNIGHT LANE CLOSURES SHALL BE ALLOWED.
4.

ALL TURF AREAS DISTURBED BY THE CONTRACTOR SHALL BE SEEDED WITH THE APPROPRIATE EROSION CONTROL, AS DIRECTED BY THE ENGINEER, AT THE CONTRACTOR'S EXPENSE.

STANDARDS
701201-05
701400-12
701426-09
701901-10

COMMITMENTS
NONE

STRUCTURE #	FACILITY CARRIED	FEATURE CROSSED	LOCATION DESCRIPTION	CURRENT ADT	ADT YR
007-0019	IL 100	PANTHER CREEK	5 MI N KAMPSVILLE	450	2023
007-0020	IL 100	SILVER CREEK	1.8 MI N ILL 96	500	2023
007-0021	IL 96	BELLEVIEW HOLLOW CREEK	BELLEVIEW	550	2023
007-0022	IL 100	MICHAEL CREEK	IN MICHAEL M.P. 5.3	1350	2023
007-0023	IL 96	HOWELL HOLLOW CREEK	8.6 MI N MOZIER	700	2023
007-0024	IL 96	WILDCAT HOLLOW CREEK	6.1 MI N MOZIER	675	2023
007-0025	IL 96	WEST PANTHER CREEK	2.7 MI N MOZIER	550	2023
007-0026	PARK ST IN HARDIN	GESKE HOLLOW CREEK	S OF JOE PAGE BRIDGE	3250	2022
007-0027	IL 100	CRAWFORD CREEK	8.1 MI N HARDIN	1250	2023
007-0028	IL 96	FOX CREEK	5MI W KAMPSVILLE	400	2023
031-0003	ELDRED HILLVIEW RD	BUCKS BRANC	3.6 MI N HILLVIEW	350	2022
031-0005	ELDRED HILLVIEW RD	TRIMLEY CREEK	2 MI N HILLVIEW	350	2022
031-0006	ELDRED HILLVIEW RD	GR RR & HURRICANE RR	WEST LIMIT HILLVIEW	300	2022
031-0012	ELDRED HILLVIEW RD	HURRICANE CREEK	0.2 MI S JCT 108	625	2022
031-0015	IL 267	APPLE CREEK	8.6 M N GREENFIELD	2150	2023
031-0016	IL 267	LICK CREEK	6.6 MI N GREENFIELD	2150	2023
031-0032	ELDRED HILLVIEW RD	SCOTT HOLLOW CREEK	1.7 MI S MORGAN CO LINE	300	2022
031-0033	ELDRED HILLVIEW RD	DOUGAL HOLLOW CREEK	8 MI N ILL 108	300	2022
031-0034	IL 267	LICK CREEK	0.78 MI S MORAGN CO LINE	2250	2023
031-0035	IL 106	SEMINARY CREEK	1 MI N WHITEHALL	1200	2023
031-0036	ELDRED HILLVIEW RD	APPLE CREEK	4.5 MI S HILLVIEW	300	2022
031-0037	ELDRED HILLVIEW RD	APPLE CREEK OVERFLOW	4.6 MI S HILLVIEW	300	2022
031-0038	IL 108	HURRICANE CREEK	1.1 MI W FAS 739	375	2023
031-0039	ELDRED HILLVIEW RD	STREAM	4.5 MI N JCT 108	400	2022
031-0040	ELDRED HILLVIEW RD	STREAM	4.1 MI N JCT 108	400	2022
031-0041	ELDRED HILLVIEW RD	COLE CREEK	2.2 M S JCT 108	550	2022
031-0042	IL 108	EAST TAYLOR CREEK BRANCH	9.4 MI E CARROLTON	1000	2023
031-0043	IL 267	TAYLOR CREEK	0.1 MI N ROCKBRIDGE	2400	2023
031-0044	IL 267	BEAR CREEK	3.5 MI N GREENFIELD	2500	2023
031-0045	IL 108	WEST TAYLOR CREEK BRANCH	8.5 MI E CARROLTON	1000	2023
042-0001	US 67	BE ARCY CREEK	1.7 MI N JERSEYVILLE	5300	2023
042-0003	IL 16 & 100	AUTEN DITCH	1.6 MI SC CALHOUN CO LINE	2250	2023
042-0004	IL 16 & 100	SHAW HOLLOW	2 MI W ILL 100	2550	2023
042-0013	IL 100	CHATAQUA CREEK	AT CHATAQUA	3150	2023
042-0023	IL 100 (NB)	PIASA CREEK	0.7 MI N CLIFTON TERR	2575	2023
042-0024	IL 100 (SB)	PIASA CREEK	0.7 MI N CLIFTON TERR	2575	2023
042-0025	IL 109	TRIB TO OTTER CREEK	2.5 MI S JERSEYVILLE	3950	2023
042-0026	US 67 SB	PIASA CREEK	7.6 MI S JERSEYVILLE	6050	2023
042-0027	US 67 NB	PIASA CREEK	7.6 MI S JERSEYVILLE	6050	2023
042-0041	IL 16 & 100	BAUM BRANCH CREEK	0.1 MI E JCT RT. 100	2400	2023

MODEL: SQQ [Sheet]
FILE NAME: c:\pw\work\pvtol\lewis\kd1100317\0876\17-ajt-SQQ.dgn


				100% STATE		
				CONSTRUCTION CODE		
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	BRIDGE	BRIDGE	BRIDGE
				0047	0047	0047
				RURAL	RURAL	RURAL
				CALHOUN	GREENE	JERSEY
67100100	MOBILIZATION	L SUM	1	0.33	0.34	0.33
X5870015	BRIDGE DECK CONCRETE SEALER	SQ FT	213828	44962	100662	68204
X7010218	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	EACH	40	10	20	10

MODEL: Schedule [Sheet]
FILE NAME: c:\p\work\pwl\lewis\ald1100317\0876\U47-sht-schedule.dgn

CALHOUN COUNTY			
STRUCTURE#	BRIDGE DECK CONCRETE SEALER	TC&P (SPECIAL)	TC&P STANDARD 701201
	SQ FT	EACH	
007-0019	6402	1	X
007-0020	4477	1	X
007-0021	4714	1	X
007-0022	2951	1	X
007-0023	2931	1	X
007-0024	4307	1	X
007-0025	5098	1	X
007-0026	3661	1	X
007-0027	4761	1	X
007-0028	5660	1	X
TOTAL	44962	10	

GREENE COUNTY			
STRUCTURE#	BRIDGE DECK CONCRETE SEALER	TC&P (SPECIAL)	TC&P STANDARD 701201
	SQ FT	EACH	
031-0003	5149	1	X
031-0005	1259	1	X
031-0006	20165	1	X
031-0012	3832	1	X
031-0015	3467	1	X
031-0016	6127	1	X
031-0032	758	1	X
031-0033	858	1	X
031-0034	4085	1	X
031-0035	3984	1	X
031-0036	16185	1	X
031-0037	7651	1	X
031-0038	3283	1	X
031-0039	2768	1	X
031-0040	2175	1	X
031-0041	2985	1	X
031-0042	3440	1	X
031-0043	6243	1	X
031-0044	3559	1	X
031-0045	2689	1	X
TOTAL	100662	20	


JERSEY COUNTY				
STRUCTURE#	BRIDGE DECK CONCRETE SEALER	TC&P (SPECIAL)	TC&P STANDARD 701201	TC&P STANDARD 701426
	SQ FT	EACH		
042-0001	1992	1	X	
042-0003	3707	1	X	
042-0004	3060	1	X	
042-0013	8759	1		X
042-0023	12359	1		X
042-0024	12359	1		X
042-0025	2807	1	X	
042-0026	10736	1		X
042-0027	12994	1		X
042-0041	2491	1	X	
TOTAL	71264	10		

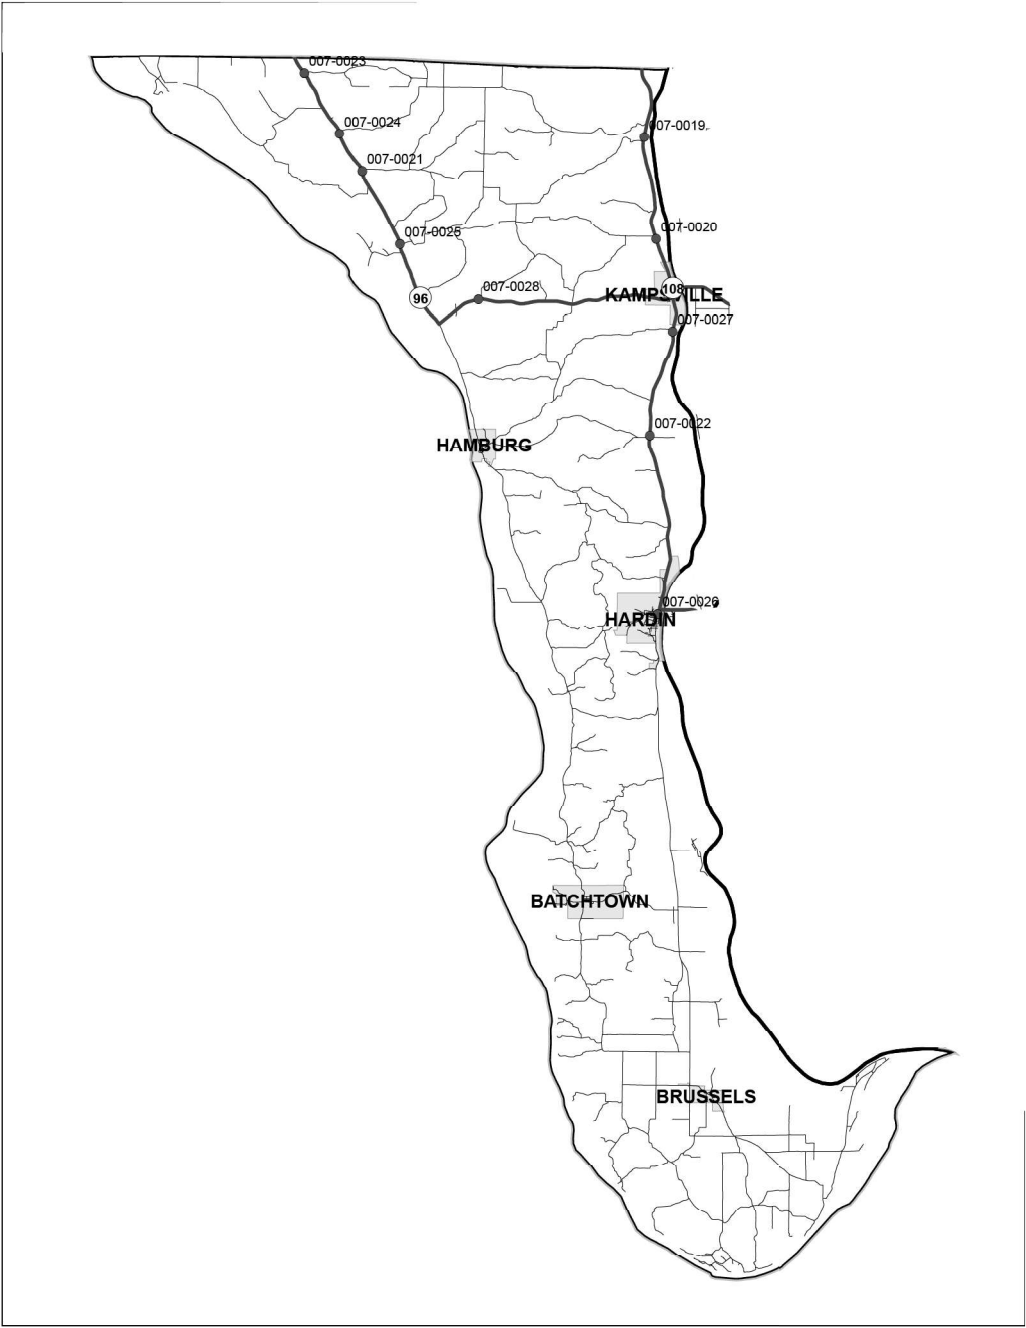

STRUCTURE #	LATITUDE	LONGITUDE	ADT	LOCATION DESCRIPTION
007-0019	39°21'57.06" N	90°37'34.43" W	450	5 MI N KAMPSVILLE
007-0020	39°19'17.40" N	90°37'09.30" W	500	1.8 MI N ILL 96
007-0021	39°50'59.56" N	90°47'02.58" W	550	BELLEVIEW
007-0022	39°14'09.24" N	90°37'20.23" W	1350	IN MICHAEL M.P. 5.3
007-0023	39°23'33.38" N	90°48'59.79" W	700	8.6 MI N MOZIER
007-0024	39°21'59.62" N	90°47'48.64" W	675	6.1 MI N MOZIER
007-0025	39°19'06.37" N	90°45'45.84" W	550	2.7 MI N MOZIER
007-0026	39°09'29.78" N	90°37'02.55" W	3250	S OF JOE PAGE BRIDGE
007-0027	39°16'52.60" N	90°36'35.05" W	1250	8.1 MI N HARDIN
007-0028	39°17'41.46" N	90°43'06.53" W	400	5MI W KAMPSVILLE

MODEL: Location map (Sheet)
FILE NAME: c:\p\work\p\work\lewis\kald1100317\B876\U47-sht-location.dgn

	USER NAME = Kevin.Lewis	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	CALHOUN COUNTY LOCATION MAP			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	DIST 8 BDS 2026-2	VARIOUS	7	5
		CHECKED -	REVISED -					CONTRACT NO. 76U47				
	PLOT DATE = 8/21/2025	DATE -	REVISED -		SCALE:	SHEET 1	OF 3 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

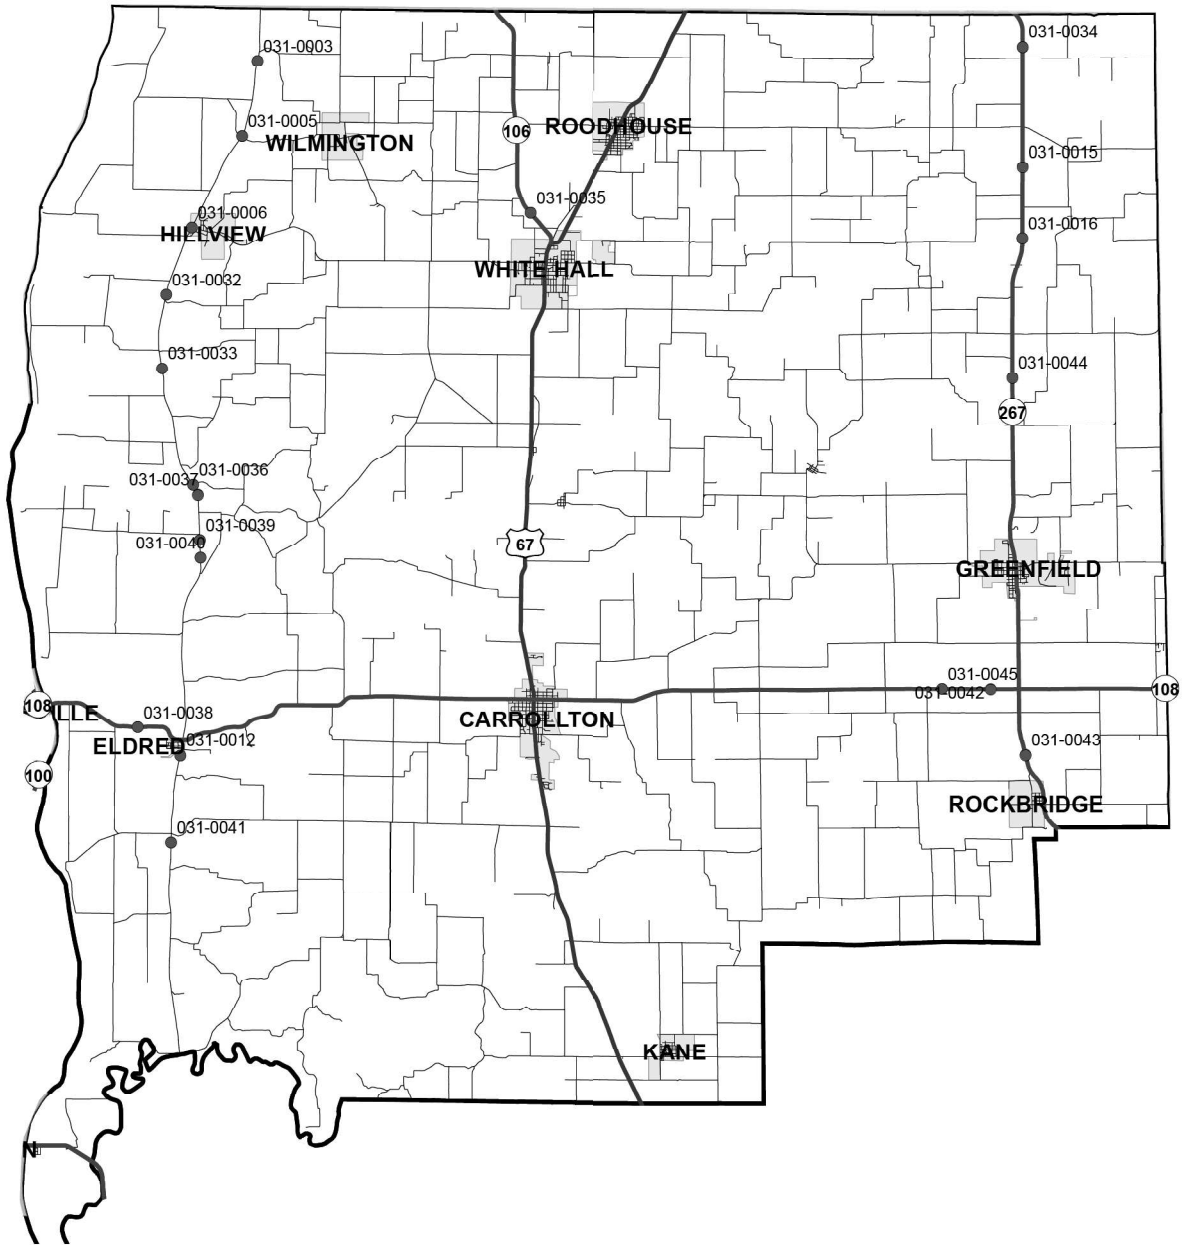

STRUCTURE #	LATITUDE	LONGITUDE	ADT	LOCATION DESCRIPTION
031-0003	39°30'12.62" N	90°31'17.23" W	350	3.6 MI N HILLVIEW
031-0005	39°28'50.21" N	90°31'38.49" W	350	2 MI N HILLVIEW
031-0006	39°27'04.52" N	90°32'52.47" W	300	WEST LIMIT HILLVIEW
031-0012	39°17'07.27" N	90°33'04.39" W	625	0.2 MI S JCT 108
031-0015	39°47'12.66" N	90°20'83.14" W	2150	8.6 M N GREENFIELD
031-0016	39°26'54.40" N	90°12'30.12" W	2150	6.6 MI N GREENFIELD
031-0032	39°25'41.00" N	90°33'31.39" W	300	1.7 MI S MORGAN CO LINE
031-0033	39°24'12.68" N	90°33'32.65" W	300	8 MI N ILL 108
031-0034	39°30'34.06" N	90°12'29.87" W	2250	0.78 MI S MORAGN CO LINE
031-0035	39°27'23.00" N	90°24'33.71" W	1200	1 MI N WHITEHALL
031-0036	39°22'10.62" N	90°32'47.40" W	300	4.5 MI S HILLVIEW
031-0037	39°21'59.68" N	90°32'41.16" W	300	4.6 MI S HILLVIEW
031-0038	39°17'33.85" N	90°34'08.51" W	375	1.1 MI W FAS 739
031-0039	39°21'08.96" N	90°32'38.21" W	400	4.5 MI N JCT 108
031-0040	39°20'48.67" N	90°32'37.15" W	400	4.1 MI N JCT 108
031-0041	39°15'23.40" N	90°33'18.51" W	550	9.4 MI E CARROLTON
031-0042	39°18'19.93" N	90°13'16.23" W	1000	0.1 MI N GREENFIELD
031-0043	39°17'03.81" N	90°12'24.71" W	2400	0.1 MI N ROCKBRIDGE
031-0044	39°24'15.44" N	90°12'44.83" W	2500	3.5 MI N GREENFIELD
031-0045	39°18'20.08" N	90°14'26.94" W	1000	8.5 MI E CARROLTON

MODEL: Location map-2 [Sheet]
FILE NAME: c:\p\work\pwl\louis\kald100317\0876\047-sht-location.dgn


USER NAME = Kevin.Lewis	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 8/21/2025	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GREENE COUNTY LOCATION MAP

SCALE: SHEET 2 OF 3 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 BDS 2026-2	VARIOUS	7	6
CONTRACT NO. 76U47				
ILLINOIS FED. AID PROJECT				

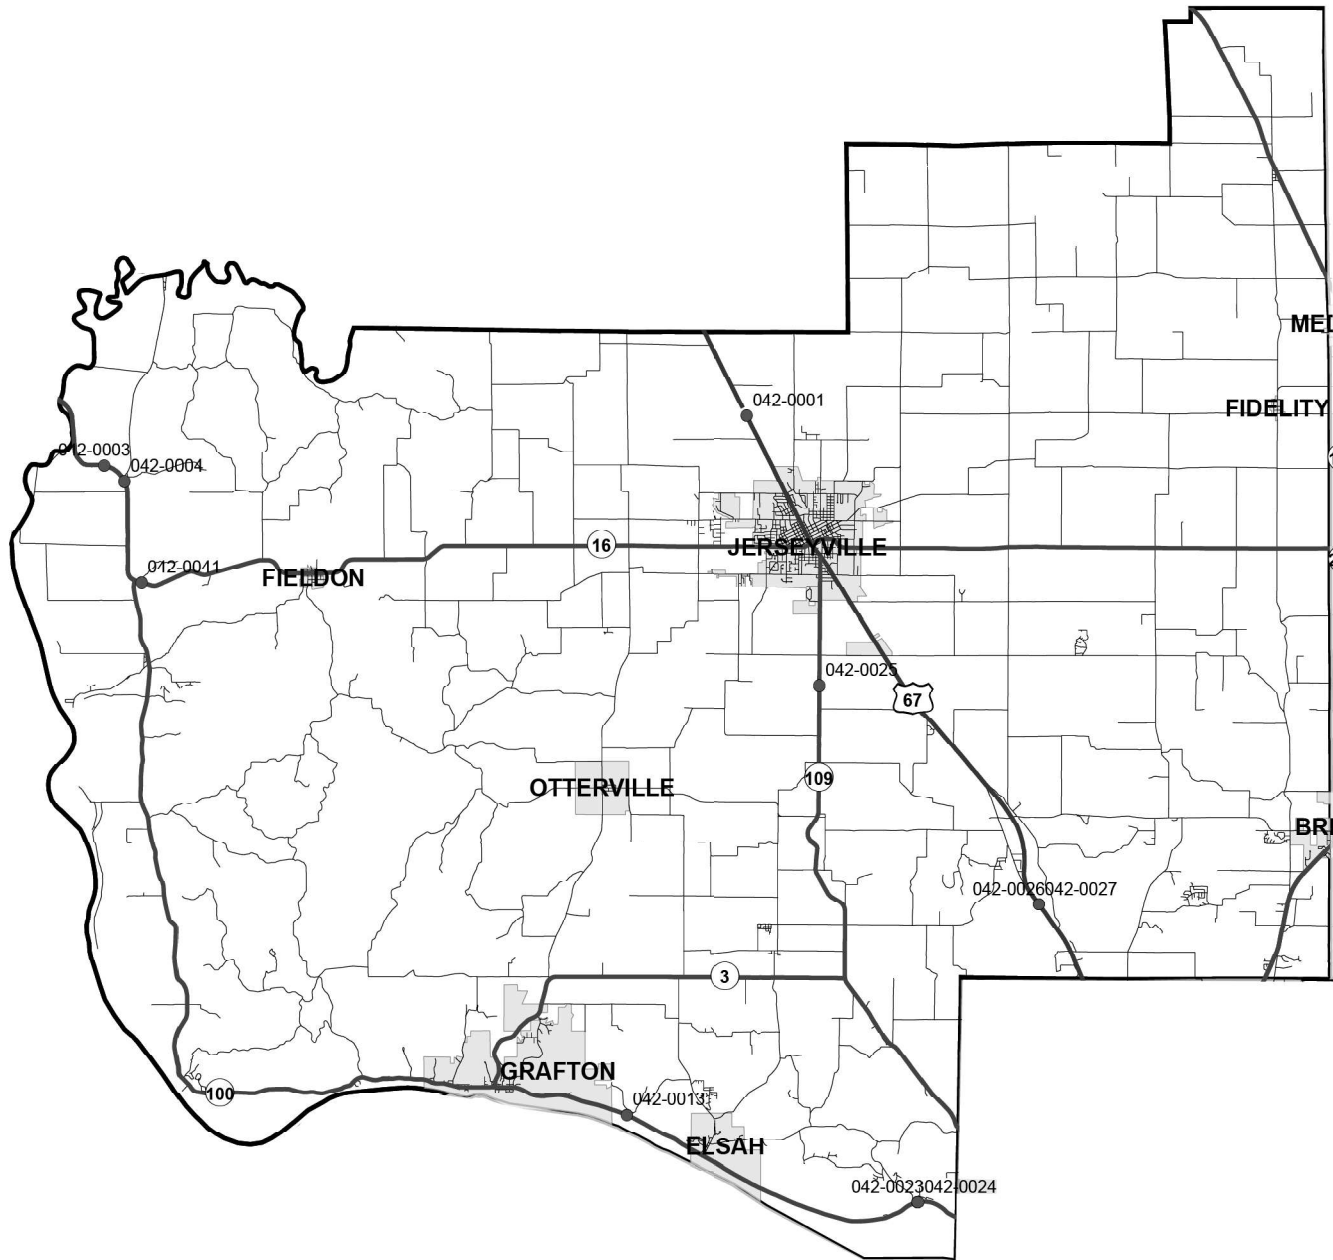

STRUCTURE #	LATITUDE	LONGITUDE	ADT	LOCATION DESCRIPTION
042-0001	39°09'02.28" N	90°20'52.31" W	5300	1.7 MI N JERSEYVILLE
042-0003	39°08'15.33" N	90°34'16.57" W	2250	1.6 MI SC CALHOUN CO LINE
042-0004	39°08'00.36" N	93°33'51.58" W	2550	2 MI W ILL 100
042-0013	38°57'44.55" N	90°23'22.07" W	3150	AT CHATAQUA
042-0023	38°56'21.42" N	90°17'18.84" W	2575	0.7 MI N CLIFTON TERR
042-0024	38°56'20.73" N	90°17'18.74" W	2575	0.7 MI N CLIFTON TERR
042-0025	39°04'43.61" N	90°19'22.87" W	3950	2.5 MI S JERSEYVILLE
042-0026	39°01'10.01" N	90°14'50.09" W	6050	7.6 MI S JERSEYVILLE
042-0027	39°01'10.37" N	90°14'49.24" W	6050	7.6 MI S JERSEYVILLE
042-0041	39°06'21.55" N	90°33'29.40" W	2400	0.1 MI E JCT RT. 100

MODEL: Location map-3 [Sheet]
FILE NAME: c:\p\work\pwl\otd\lewiskald100317\B876\J47-sht-location.dgn

USER NAME	= Kevin.Lewis	DESIGNED	-	REVISED	-
		DRAWN	-	REVISED	-
		CHECKED	-	REVISED	-
PLOT DATE	= 8/21/2025	DATE	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

JERSEY COUNTY LOCATION MAP

SCALE: SHEET 3 OF 3 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	DIST 8 BDS 2026-2	VARIOUS	7	7
CONTRACT NO. 76U47				
ILLINOIS FED. AID PROJECT				