

SUMMARY OF QUANTITIES
(CONSTRUCTION TYPE CODE: 0010)

PAY CODE	PAY ITEM	UNIT	QUANTITY
	NAME		
+ 20100110	TREE REMOVAL (6 TO 15 UNITS DIAMETER)	UNIT	110
+ 20100210	TREE REMOVAL (OVER 15 UNITS DIAMETER)	UNIT	18
+ 20100500	TREE REMOVAL, ACRES	ACRE	2.87 2.79
20201200	REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL	CU YD	50
20300100	CHANNEL EXCAVATION	CU YD	18,201
20800150	TRENCH BACKFILL	CU YD	60
+ 25000310	SEEDING, CLASS 4	ACRE	2.00
+ 25100630	EROSION CONTROL BLANKET	SQ YD	26,077
+ 28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	546
+ 28000305	TEMPORARY DITCH CHECKS	FOOT	24
+ 28000400	PERIMETER EROSION BARRIER	FOOT	4,508
28000500	INLET AND PIPE PROTECTION	EACH	5
28100109	STONE RIPRAP, CLASS A5	SQ YD	879
28200200	FILTER FABRIC	SQ YD	879

+ DENOTES SPECIALTY ITEM

PAY CODE	PAY ITEM	UNIT	QUANTITY
	NAME		
30300011	AGGREGATE SUBGRADE IMPROVEMENT	TON	4,211
31101400	SUBBASE GRANULAR MATERIAL, TYPE B 6"	SQ YD	688
31102300	SUBBASE GRANULAR MATERIAL, TYPE C 6"	SQ YD	688
35101400	AGGREGATE BASE COURSE, TYPE B	TON	151
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	297
40600275	BITUMINOUS MATERIALS (PRIME COAT)	POUND	12,247
40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	1,226
40603080	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	TON	887
40604050	HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX "C", N50	TON	592
40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	54
42001300	PROTECTIVE COAT	SQ YD	50
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	33
48101200	AGGREGATE SHOULDERS, TYPE B	TON	432
48203100	HOT-MIX ASPHALT SHOULDERS	TON	163

+ DENOTES SPECIALTY ITEM

REVISION	DATE	BY	REMARKS	DESIGNED
△	12/19/2025	LGN	REVISED TREE REMOVAL QUANTITY	GFS
				DRAWN DLB
				REVIEWED GFS
				APPROVED GFS

CITY OF MORRISON/WHITESIDE COUNTY
M.S. 2300 (GENESEE CT.) OVER ROCK CREEK
STA. 20+00



WILLETT HOFMANN
& ASSOCIATES, INC.
ENGINEERING ARCHITECTURE LAND SURVEYING
1515 FIFTH AVENUE, SUITE 102, MOLINE, IL 61265
T: 309-517-1119 DESIGN FIRM: # 184-000918

SUMMARY OF QUANTITIES

SHEET 1 OF 3 SHEETS

M.S.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2300	18-00237-00-BR	WHITESIDE	<u>119</u>	<u>3</u>
WHA# 1518D18		CONTRACT NO. 85786		
ILLINOIS FED. AID PROJECT HHN6(619)				

SCHEDULE OF QUANTITIES

TREE REMOVAL (6 TO 15 UNITS DIAMETER)		
STATION	UNIT	REMARKS
GENESEE COURT		
18+51 RT 63'	6	
18+51 RT 63'	7	
18+51 RT 63'	8	
18+51 RT 63'	8	
20+40 LT 58'	6	
20+40 LT 58'	6	
20+40 LT 58'	8	
20+40 LT 58'	8	
20+40 LT 58'	8	
20+67 LT 31'	6	
20+67 LT 31'	6	
20+70 LT 35'	6	
20+70 LT 35'	6	
20+70 LT 35'	6	
21+11 LT 51'	15	
PROJECT TOTAL		
20100110		

TREE REMOVAL (OVER 15 UNITS DIAMETER)		
STATION	UNIT	REMARKS
GENESEE COURT		
21+90 RT 19'	18	
PROJECT TOTAL		
20100210		

TREE REMOVAL, ACRES		
STATION	ACRE	REMARKS
GENESEE COURT		
RT 10+79 - 16+28	0.18	SOUTH EDGE ALONG TEMP. EASEMENT
RT 10+79 - 16+29	0.40	NORTH EDGE ALONG TEMP. EASEMENT
LISTER ROAD		
44+98 - 49+48	1.41	BOTH SIDES OF ROADWAY
ROCK CREEK		
LT 30+71 - 39+61	0.58	WEST CREEK BANK
LT 41+21 - 44+66	0.22	WEST CREEK BANK
PROJECT TOTAL		
20100500		

REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL		
STATION	CU YD	REMARKS
GENESEE COURT		
	50	
PROJECT TOTAL		
20201200		

TRENCH BACKFILL		
STATION	CU YD	REMARKS
GENESEE COURT		
LT 13+85 - 14+38	7	15" PIPE CULVERT
LT 16+84 - 17+39	14	15" PIPE CULVERT
SUB TOTAL:		
LISTER ROAD		
45+75	7	15" PIPE CULVERT
LT 44+00 - 44+50	7	15" PIPE CULVERT
49+44	25	18" PIPE CULVERT
SUB TOTAL:		
PROJECT TOTAL		
20800150		

EROSION CONTROL BLANKET		
STATION	SQ YD	REMARKS
GENESEE COURT		
LT 10+44 - 14+00	1,321	
LT 14+24 - 17+00	1,228	
LT 17+23 - 19+12	916	
LT 20+87 - 21+25	119	
LT 21+37 - 22+00	144	
RT 10+45 - 16+91	2,556	
RT 17+34 - 19+12	348	
RT 20+62 - 21+06	473	
RT 21+41 - 22+00	118	
SUB TOTAL:		
LISTER ROAD		
LT 40+65 - 49+19	1,319	
RT 40+65 - 49+27	1,814	
SUB TOTAL:		
ROCK CREEK		
LT 30+82 - 39+71	9,907	
LT 40+45 - 45+19	3,974	
RT 40+58 - 45+19	1,840	
SUB TOTAL:		
PROJECT TOTAL		
25100630		

REVISION	DATE	BY	REMARKS
△	12/19/2025	LGN	REVISED TREE REMOVAL SCHEDULE

DESIGNED	GFS
DRAWN	DLB
REVIEWED	GFS
APPROVED	GFS

CITY OF MORRISON/WHITESIDE COUNTY
M.S. 2300 (GENESEE CT.) OVER ROCK CREEK
STA. 20+00


WILLET HOFMANN
& ASSOCIATES INC

ENGINEERING ARCHITECTURE LAND SURVEYING
1515 FIFTH AVENUE, SUITE 102, MOLINE, IL 61265
T: 309-517-1119 DESIGN FIRM: # 184-000918

SCHEDULE OF QUANTITIES

SHEET 1 OF 5 SHEETS

M.S.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2300	18-00237-00-BR	WHITESIDE	<u>119</u>	<u>10</u>
WHA# 1518D18		CONTRACT NO. 85786		
ILLINOIS		FED. AID PROJECT HHN6(619)		

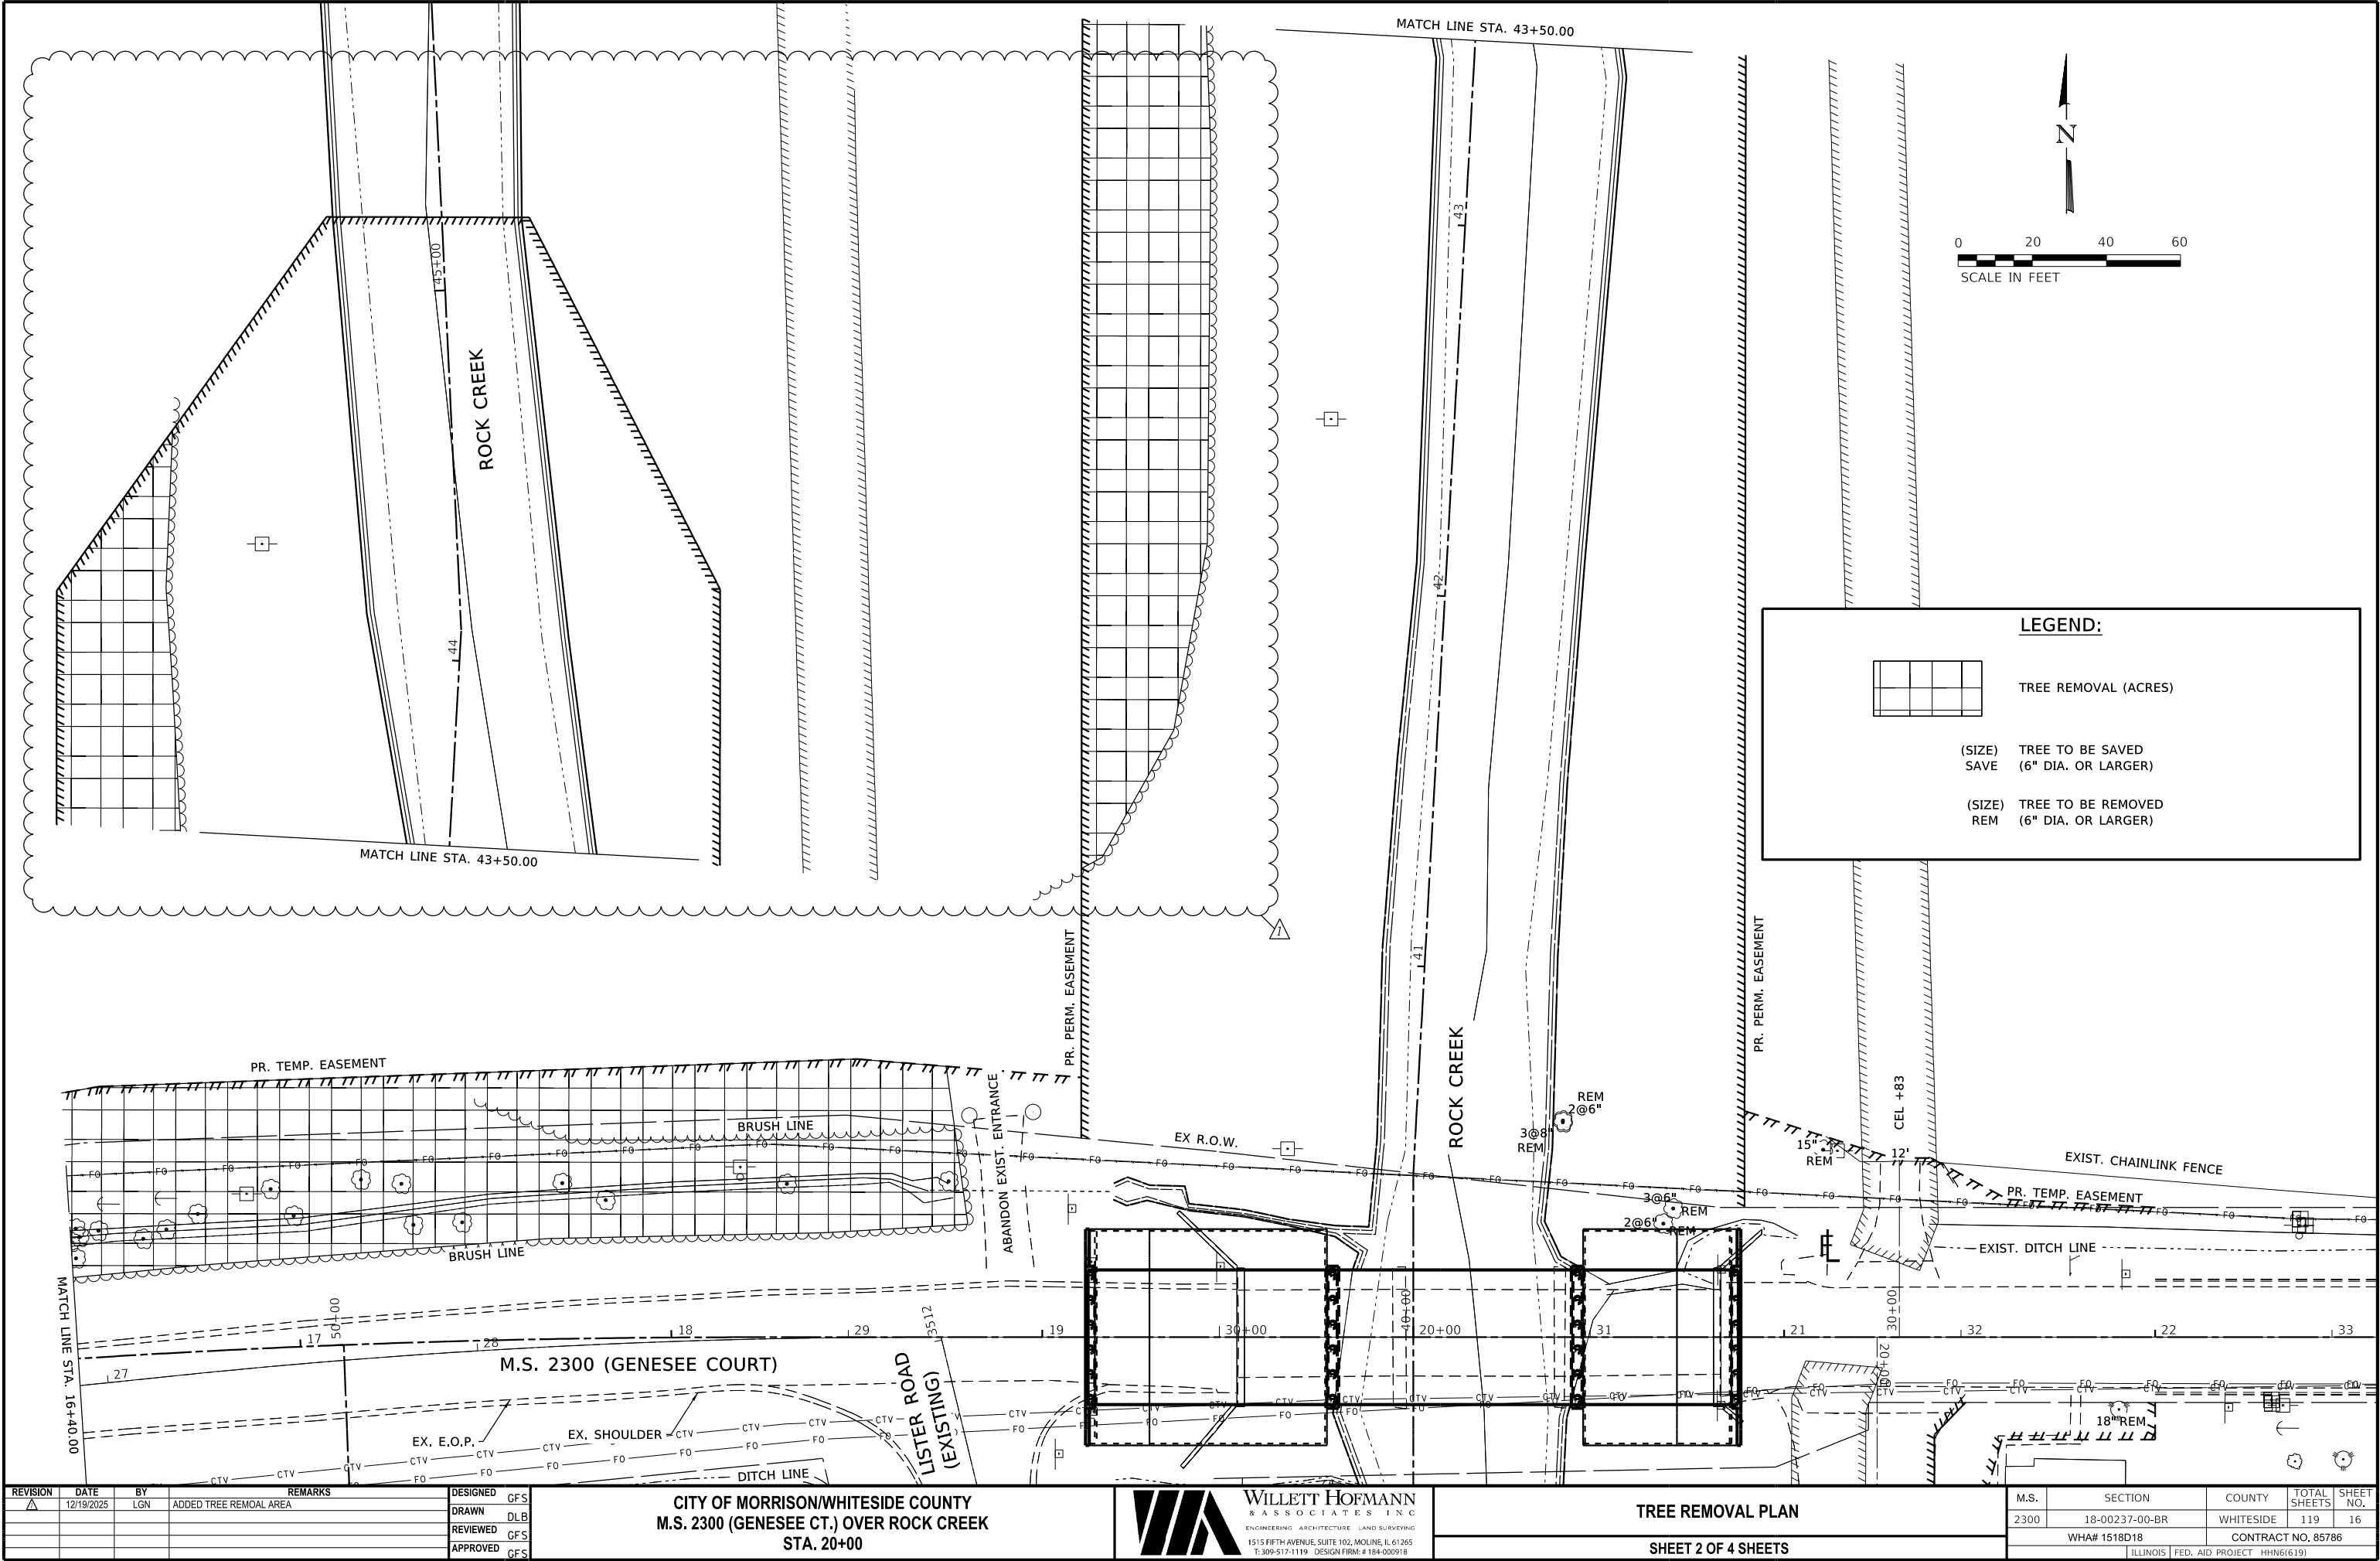

REVISION	DATE	BY	REMARKS
1	12/19/2025	LGN	ADDED TREE REMOVAL AREA

DESIGNED	GFS
DRAWN	DLB
REVIEWED	GFS
APPROVED	GFS

CITY OF MORRISON/WHITESIDE COUNTY
M.S. 2300 (GENESEE CT.) OVER ROCK CREEK
STA. 20+00

WILLET HOFMANN & ASSOCIATES, INC.
ENGINEERING ARCHITECTURE LAND SURVEYING
1515 FIFTH AVENUE, SUITE 102, MOLINE, IL 61265
T: 309-517-1119 DESIGN FIRM: # 184-000918

TREE REMOVAL PLAN

SHEET 2 OF 4 SHEETS

M.S.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2300	18-00237-00-BR	WHITESIDE	119	16
WHA# 1518D18		CONTRACT NO. 85786		