
F.A.U. SECTION COUNTY 1321 0711 RS-2 соок FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT

CONTRACT NO. 60A49

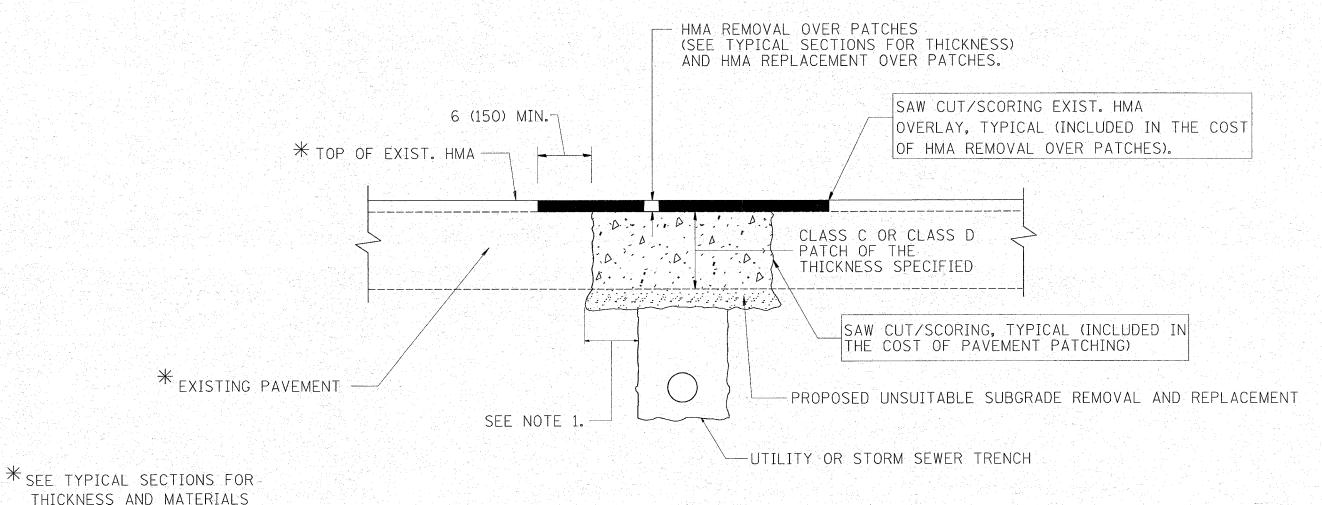

NOTES:

- 1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12 (300) WIDER ON EACH SIDE OF THE TRENCH.
- 2. FOR METHOD OF MEASUREMENT AND BASIS OF PAYMENT, SEE RECURRING SPECIAL PROVISION "PATCHING WITH HOT-MIX ASPHALT OVERLAY REMOVAL".

SEQUENCE OF CONSTRUCTION

- 1. REMOVE THE EXISTING HMA MATERIAL OVER THE AREA TO BE PATCHED.
- 2. REMOVE AND REPLACE FULL DEPTH PATCHES
- 3. REPLACE HMA MATERIAL OVER THE AREA TO BE PATCHED.

	REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
	NAME	DATE	TELINOIS DEPARTMENT OF TRANSFORTATION
	R. SHAH	10/25/94	
	R. SHAH	01/14/95	
	R. SHAH	03/23/95	PAVEMENT PATCHING FOR
	R. SHAH	04/24/95	HMA SURFACED
	A. HOUSEH	03/15/96	
	A. ABBAS	03/21/97	PAVEMENT
	A. ABBAS	01/20/98	

04/27/98 SCALE: VERT. NONE

CHECKED BY

BD400-04 (BD-22)

NAME = 3/10/2008
NAME = \\distintfs2\use
SCALE = 50.000 // IN,