F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
337	20R-5	LAKE	562	15
STA. 99+815.668		TO STA. 104+665.000		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	
D-91-552-99				60881

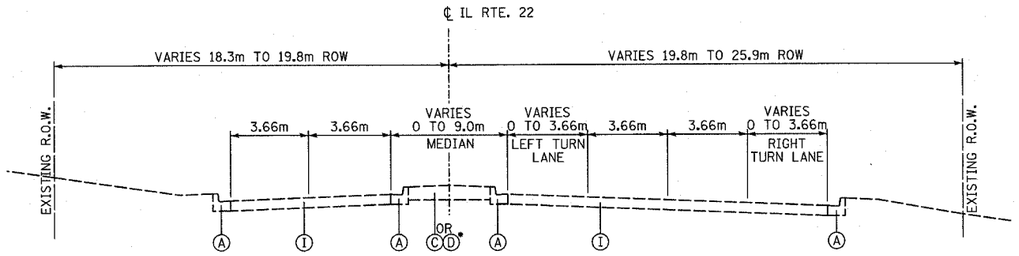

ILLINOIS ROUTE 22

STA. 99+815.000 TO STA. 100+026.292

• EXISTING LANDSCAPED MEDIAN
STA 99+820.291 TO STA 99+954.946

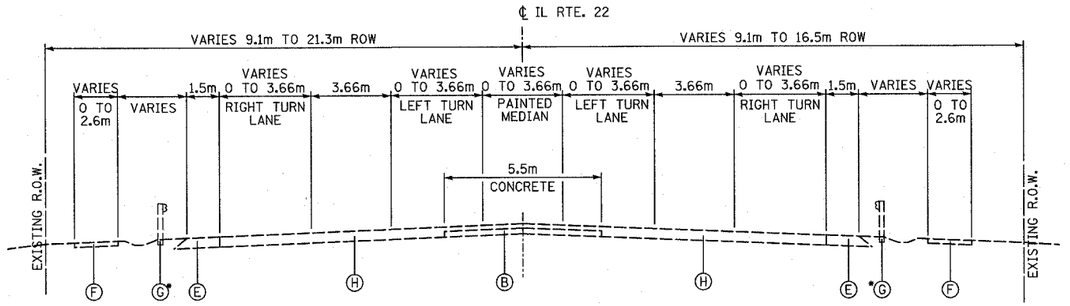

ILLINOIS ROUTE 22

STA. 100+533.598 TO STA. 101+418.230
STA. 102+357.860 TO STA. 102+831.042
STA. 103+023.335 TO STA. 104+265.000••

• EXISTING GUARDRAIL
STA 100+931.160 TO STA 101+024.830

•• NOTE: IN THIS AREA, BASE COURSE MAY BE ±254mm (10") POZZPLONIC OR CEMENT AGGREGATE MATERIAL. COST INCLUDED IN PAVEMENT REMOVAL.

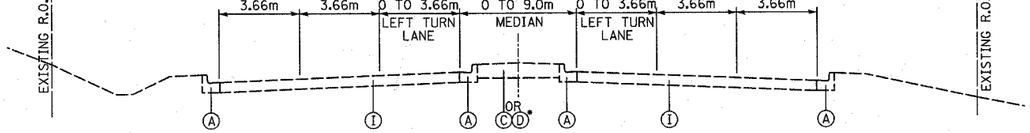

ILLINOIS ROUTE 22

STA. 100+026.292 TO STA. 100+158.00

• EXISTING LANDSCAPED MEDIAN
STA 100+046.984 TO STA 100+314.579

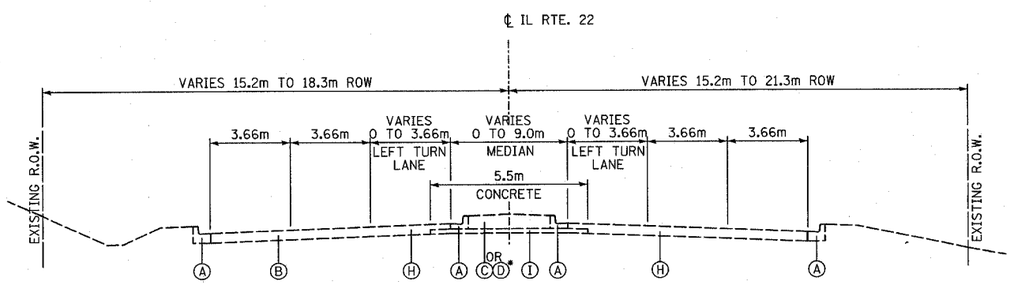

ILLINOIS ROUTE 22

STA. 100+158.000 TO STA. 100+533.598

• EXISTING LANDSCAPED MEDIAN
STA 100+046.984 TO STA 100+314.579

EXISTING LEGEND

- Ⓐ EXISTING CONCRETE CURB AND GUTTER
- Ⓑ EXISTING BITUMINOUS SURFACE OVERLAY (± 127mm (5")) ON P.C.C. PAVEMENT (± 228-583-228mm (9"-7"-9"))
- Ⓒ EXISTING CONCRETE MEDIAN
- Ⓓ EXISTING GRASS MEDIAN
- Ⓔ EXISTING BITUMINOUS OR AGGREGATE SHOULDER
- Ⓕ EXISTING CONCRETE OR BITUMINOUS SIDEWALK
- Ⓖ EXISTING GUARD RAIL
- Ⓗ EXISTING BITUMINOUS SURFACE, ± 127mm (5") ON BITUMINOUS BASE COURSE, ± 228mm (9")
- Ⓘ EXISTING CONCRETE PAVEMENT, ± 230mm (9")
- Ⓙ EXISTING STABILIZED MEDIAN SURFACE, ± 300mm (12")
- Ⓚ EXISTING BITUMINOUS SURFACE, ± 75mm (3") ON POZZOLONIC OR CEMENT AGGREGATE MATERIAL, ± 250mm (10")

FINAL SURVEY	BY	DATE
SURVEYED		
PLOTTED		
NOTE BOOK	TEMPLATE AREAS	
NO.	AREAS CHECKED	

ORIGINAL SURVEY	BY	DATE
SURVEYED		
PLOTTED		
NOTE BOOK	TEMPLATE AREAS	
NO.	AREAS CHECKED	

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
IL RTE 22 (FAP 337)
IL RTE 83 TO US 45 / IL 21 (MILWAUKEE AVE)

EXISTING TYPICAL SECTIONS

ILLINOIS ROUTE 22

SCALE: NONE DRAWN BY: JSM

DATE: 03-22-2004 CHECKED BY: JNR

P:\00332\Rdgd\22typex01.dgn 03/23/2004 02:07:44 PM