


FOR MILLING AND RESURFACING

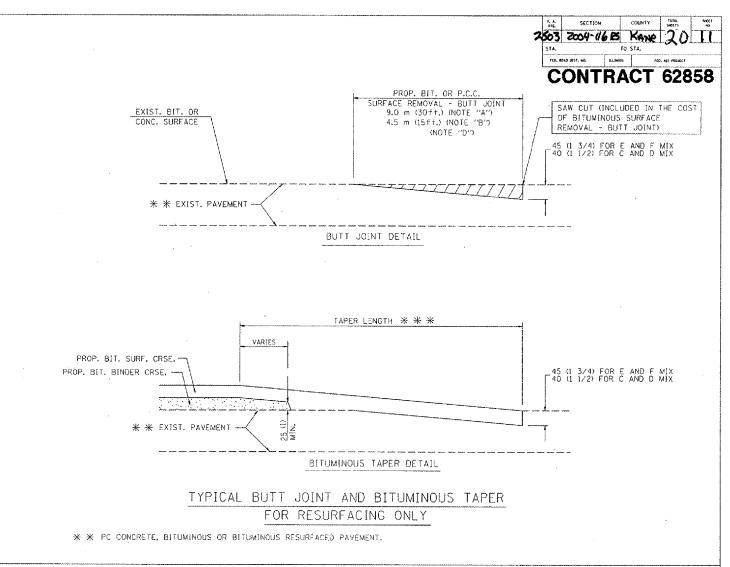

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP, RAMP SHALL BE CONSTRUCTED (MMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.
- E: TAPER THE TEMP, RAMP AT A RATE OF SOC (3 ft.) PER INCH OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 1.35 or (4.57) TEMP, BIT, RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT".
- G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT"
- * SEE TYPICAL SECTIONS FOR MILLING PHICKNESS.
- ** ** 6.1 m (20") PER 25 (1) RESURFACING (NOTE "A") 3.0 m (10") PER 25 (1) RESURFACING (NOTE "B")

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER DETAILS

SCALE: NONE

M. DE YONG

DRAWN BY CHECKED BY BD400-05 (VI=BD32)

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR PER SOUARE METER (SOUARE YARD.)
AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT" OR
AS "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT