| F.A.U. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 2652 | 00-00069-00-PV | DUPAGE | 146 | 86 |
| STA. 10+70.70 | | TO STA. 66+16.00 | | |
| FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |

CONTRACT NO. 83781







A–A




E–E

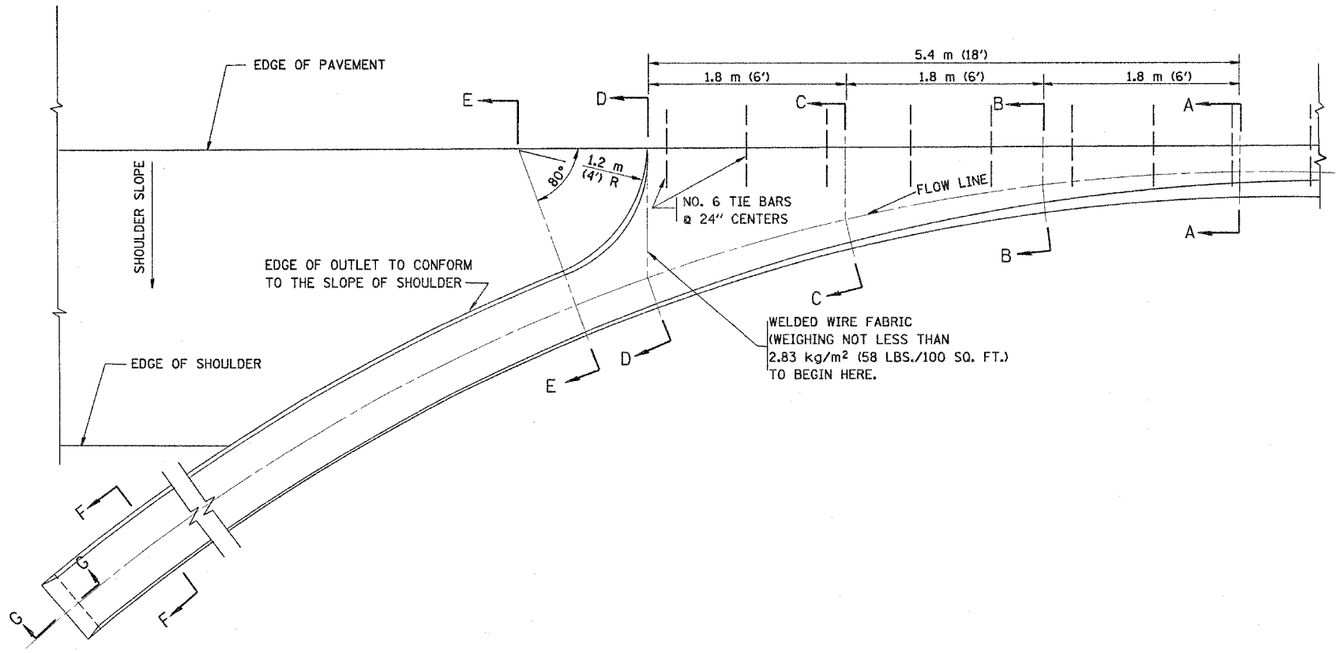


D–D

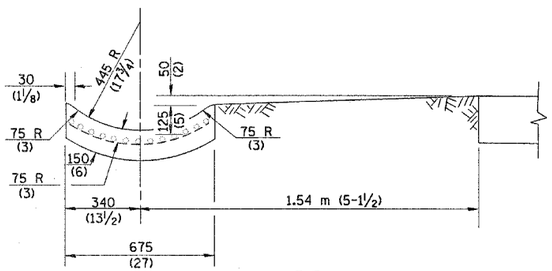


C–C

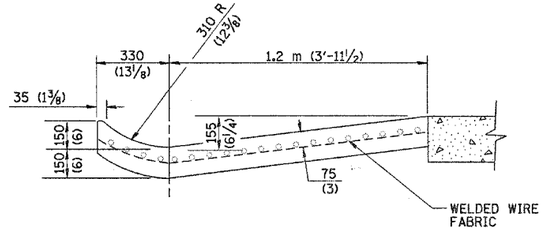


B–B

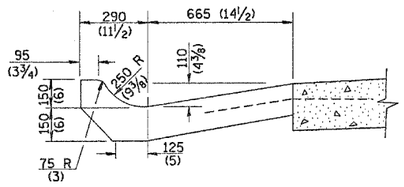


F–F




G–G

## GENERAL NOTES

GUTTER OUTLET SHALL BE TIED TO THE PAVEMENT IN ACCORDANCE WITH DETAILS FOR LONGITUDINAL CONSTRUCTION JOINT SHOWN ON STANDARD 420001.

TIE BARS SHALL BE NO. 20 (NO.6) AT 600 (24) CENTERS UNLESS OTHERWISE SHOWN.

IF THE AVERAGE GRADE OF PAVEMENT FOR THE DISTANCE FROM SECTION A-A TO D-D EXCEEDS 2%, THIS DISTANCE SHALL BE INCREASED 1.8 m (6') FOR EACH 1% INCREASE IN GRADE.

## QUANTITIES

FOR SECTION A-A TO E-E AND CURTAIN WALL=
0.96 $m^3$ (1.25 CU. YDS.) CLASS SI CONCRETE (OUTLET) FOR 225 (9) PAV'T.
0.97 $m^3$ (1.27 CU. YDS.) CLASS SI CONCRETE (OUTLET) FOR 250 (10) PAV'T.
FOR SECTION F-F=
0.03 $m^3$ (0.045 CU. YDS.) CLASS SI CONCRETE PER m (ft.).

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

| REVISIONS NAME | DATE |
|---|---|
| | |


Stanley Consultants INC.
1850 West Higgins Road
Suite 730
Chicago, Illinois 60613-2801 Illinois Firm Registration No.: 184-000533


VILLAGE OF VILLA PARK, ILLINOIS

# OUTLET FOR CONCRETE CURB AND GUTTER TYPE B-15.30 (B-6.12)

SCALE: NONE
DRAWN BY: E.D.
DATE: 11-NOV-2004
CHECKED BY: J.T.G.

PLAN: SURVEYED, PLOTTED, ALIGNMENT CHECKED, RT. OF WAY CHECKED, NOTE BOOK, NO., ADD'L FILE NAME, BY, DATE

PROFILE: SURVEYED, PLOTTED, GRADES CHECKED, BEN. NOTED, SIGNATURE NOTATNS CMPLTD, NOTE BOOK, NO., BY, DATE