


F.A.P. ROUTE	COUNTY SECTION	COUNTY	TOTAL SH.
336	99-00243-00-PV	KANE	268
	CONTRACT NO.		
	83782		
TEMPORARY TRAFFIC SIGNAL INSTALLATION			
F.H.W.A. REG.5 ILLINOIS PROJECT F-0336/00			

PROPOSED TEMPORARY TRAFFIC SIGNAL LEGEND

- | | | | |
|---|---|-----|--|
| ▲ | TEMPORARY TRAFFIC SIGNAL HEAD SPAN WIRE MOUNTED ORIGINAL LOCATION | --- | G.S. CONDUIT IN TRENCH (T) OR PUSHED (P) |
| ▼ | TEMPORARY TRAFFIC SIGNAL HEAD SPAN WIRE MOUNTED SECONDARY LOCATION | ■ | HANDHOLE |
| ⊗ | TEMPORARY WOOD POLE (CLASS 5 OR BETTER) 45 FOOT (13.7m) MIN. | ▣ | HEAVY DUTY HANDHOLE |
| ⊠ | TEMPORARY CONTROLLER CABINET | CT | COMMON TRENCH |
| — | TEMPORARY SPAN WIRE, TETHER WIRE, AND CABLE | UD | UNIT DUCT |
| ⊞ | TEMPORARY SERVICE INSTALLATION | ■ | FOCUS AREAS FOR VIDEO DETECTION |
| ⊞ | TEMPORARY PEDESTRIAN SIGNAL HEAD, BRACKET MOUNTED | ⊞ | YAGI ANTENNA |
| ⊞ | MACHINE VISION PROCESSOR (MVP) | | |
| ● | PEDESTRIAN PUSHBUTTON DETECTOR | | |
| ▲ | EMERGENCY VEHICLE LIGHT DETECTOR | | |
| ⊞ | CONFIRMATION BEACON | | |
| ⊞ | TEMPORARY LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 400W AND 20' ARM | | |
| □ | VEHICLE DETECTOR, INDUCTION LOOP | | |

SCALE: 1" = 20'

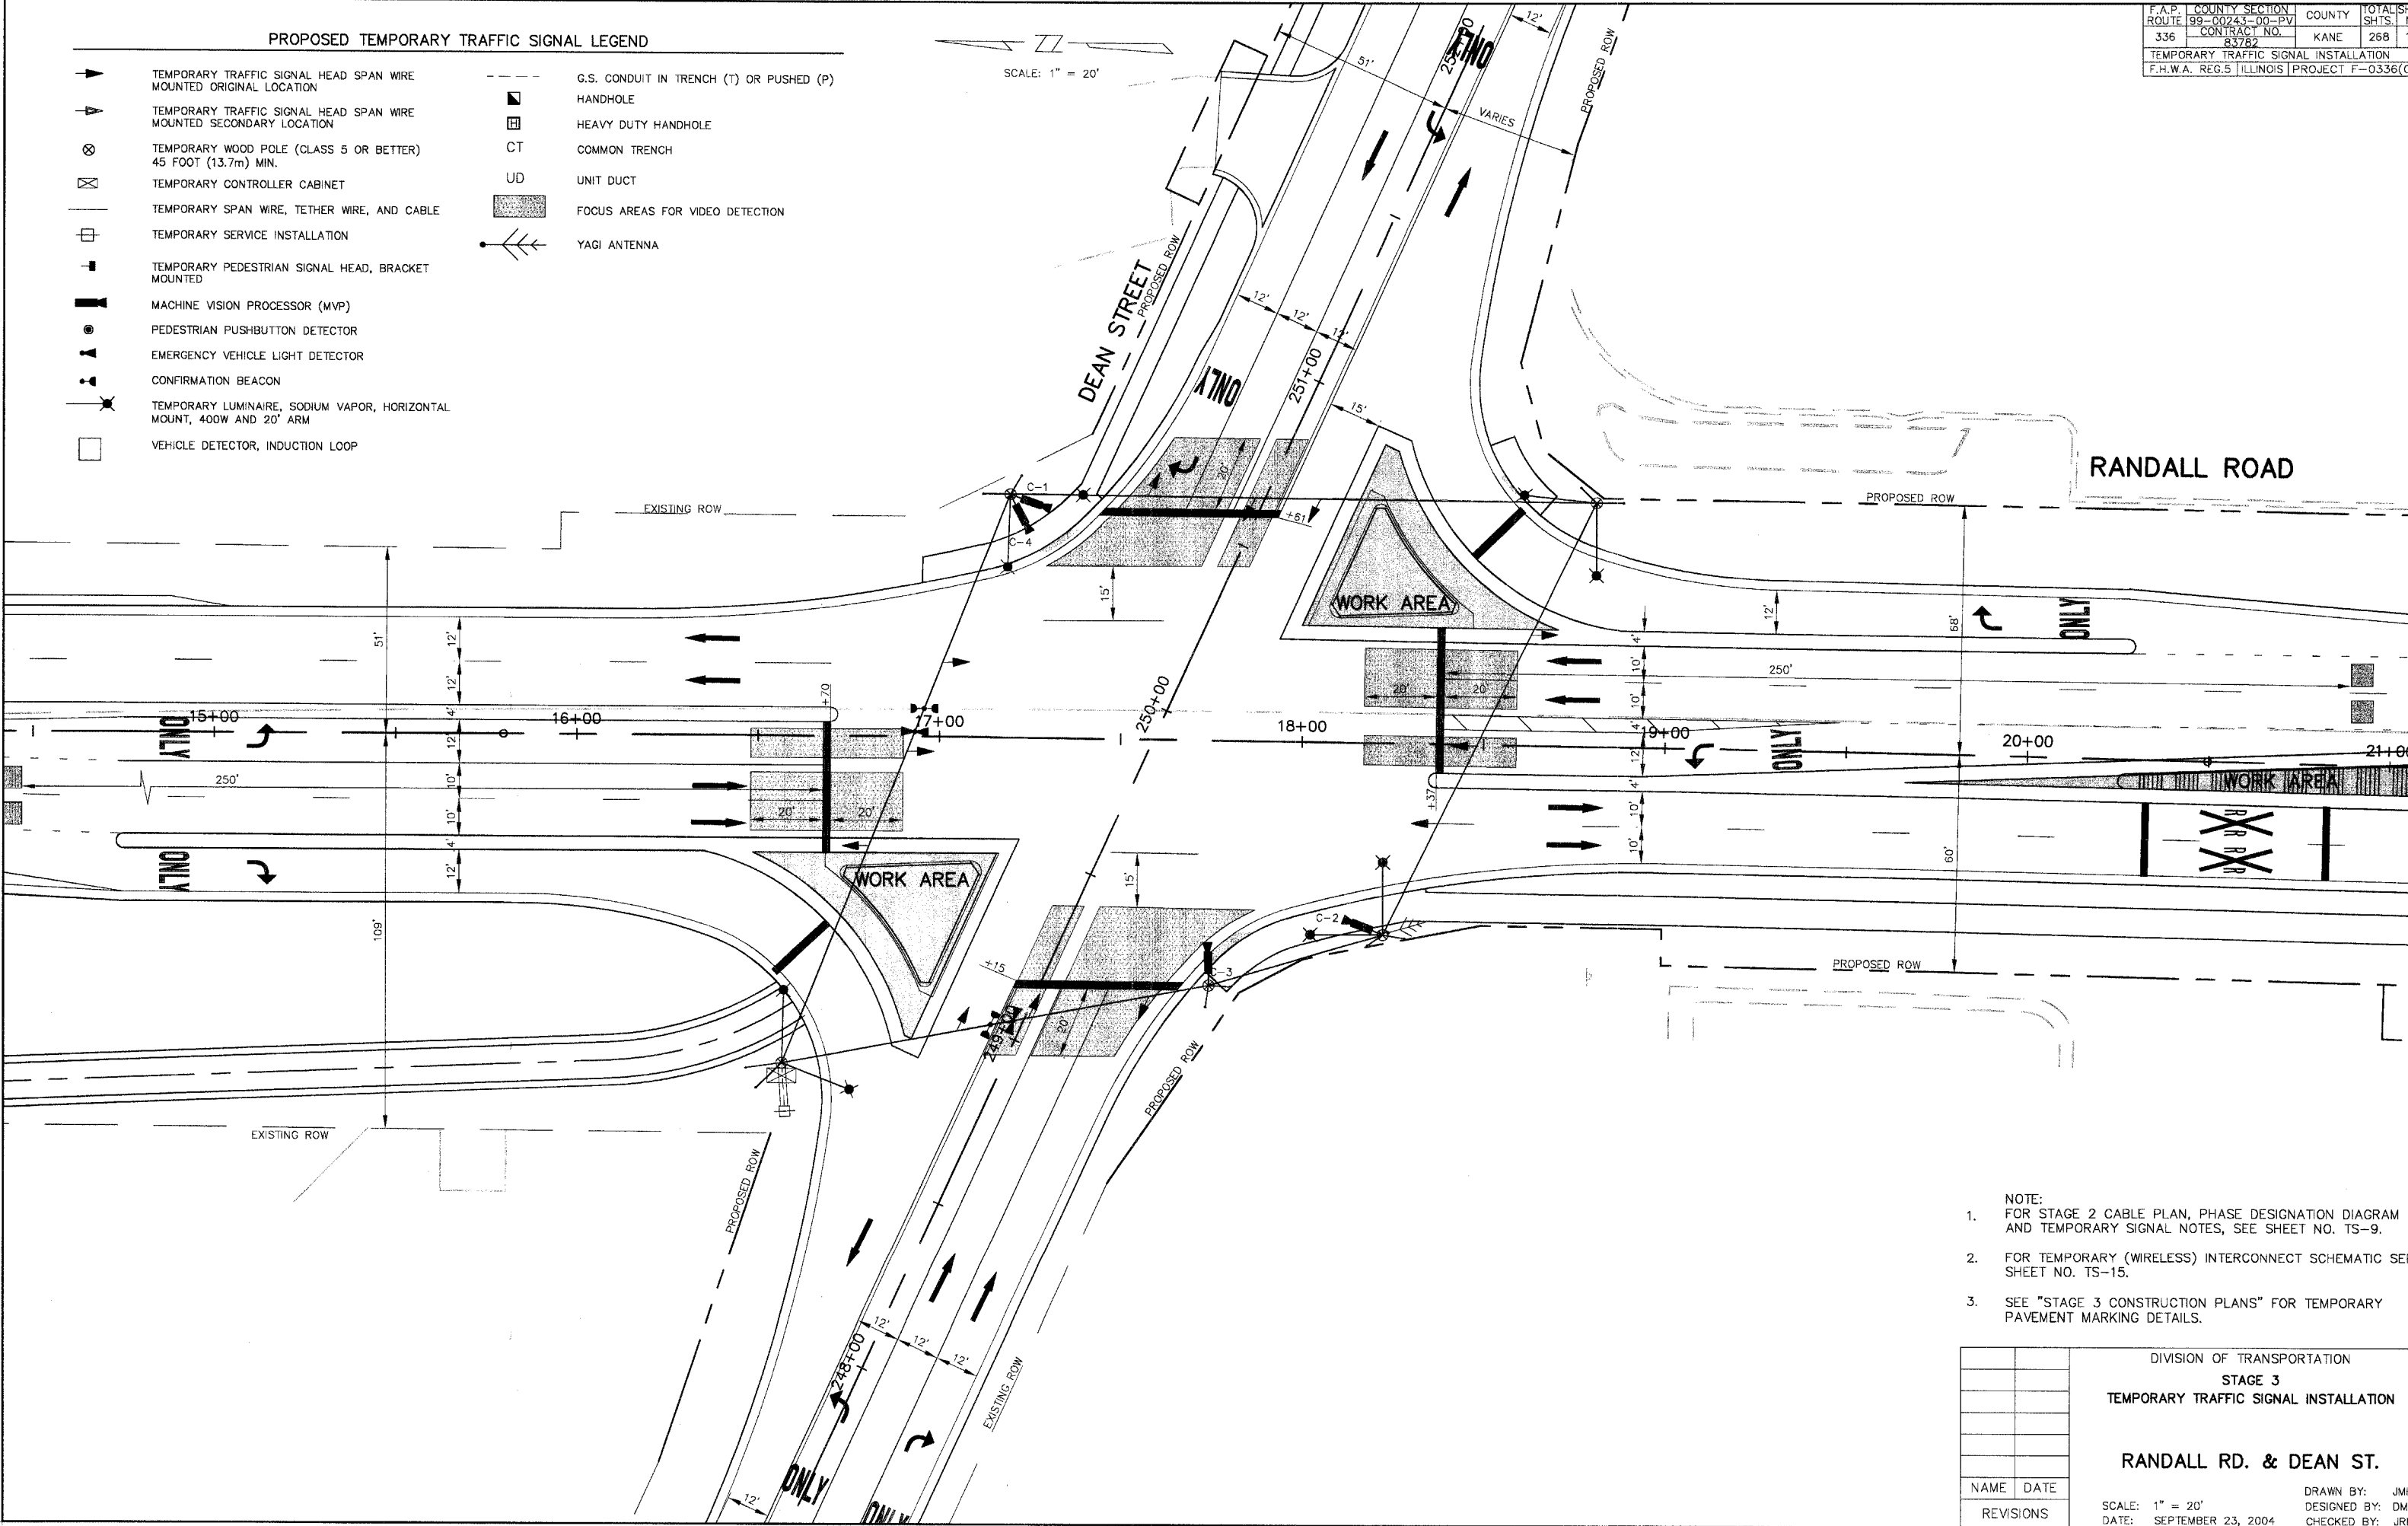

- NOTE:
- FOR STAGE 2 CABLE PLAN, PHASE DESIGNATION DIAGRAM AND TEMPORARY SIGNAL NOTES, SEE SHEET NO. TS-9.
 - FOR TEMPORARY (WIRELESS) INTERCONNECT SCHEMATIC SEE SHEET NO. TS-15.
 - SEE "STAGE 3 CONSTRUCTION PLANS" FOR TEMPORARY PAVEMENT MARKING DETAILS.

DIVISION OF TRANSPORTATION	
STAGE 3	
TEMPORARY TRAFFIC SIGNAL INSTALLATION	
RANDALL RD. & DEAN ST.	
NAME	DATE
REVISIONS	

SCALE: 1" = 20'
DATE: SEPTEMBER 23, 2004

DRAWN BY: JMH
DESIGNED BY: DMH
CHECKED BY: JRL