

## EXISTING CONDITIONS


- (1) EXISTING BITUMINOUS SURFACE, 2-3"
  (TO BE PAID FOR AS BITUMINOUS SURFACE REMOVAL, VARIABLE DEPTH (0"-3"), SEE NOTE 3)
- 2 EXISTING P.C.C. BASE, 6.0"
- (3) EXISTING B-6.18 CONCRETE CURB AND GUTTER (TO BE PAID FOR AS COMBINATION CURB AND GUTTER REMOVAL)
- (4) EXISTING P.C.C. SIDEWALK (TO BE PAID FOR AS SIDEWALK REMOVAL)

## NOTE

- 1. P.C.C. SIDEWALK, 5" SHALL BE PLACED WHERE INDICATED ON PLANS OR AS DIRECTED BY THE ENGINEER.
- 2. SEE CROSS SECTIONS FOR PARKWAY ELEVATIONS AND SLOPES.
- REMOVAL AND DISPOSAL OF BITUMINOUS SURFACE OVERLAYING THE GUTTER IS INCIDENTAL TO CONCRETE CURB AND GUTTER REMOVAL.

## PROPOSED CONDITIONS

- (A) SODDING, SALT TOLERANT
- B TOPSOIL, FURNISH AND PLACE, (4")
- © BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE MIX "D", N50 (11/2")
- D LEVELING BINDER (MACHINE METHOD), SUPERPAVE N50 (1" AND VARIES)
- FULL DEPTH SAWCUT AT PROPOSED EDGE
   OF PAVEMENT (INCIDENTAL TO REMOVAL ITEM)
- F) SUBBASE GRANULAR MATERIAL, TYPE B, 4"
- G BITUMINOUS MATERIAL (PRIME COAT) & AGGREGATE (PRIME COAT)
- (H) CLASS D PATCHES, 6" (SUPERPAVE, IL 19, N70)\*
- ① COMBINATION CURB AND GUTTER, TYPE B-6.18
- J P.C.C. SIDEWALK, 5" (SEE NOTE 1)
- (K) PAVEMENT REMOVAL

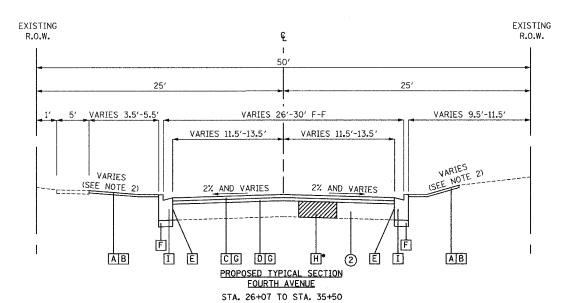

EXISTING EXISTING R.O.W. R.O.W. 25' VARIES 26'-28' F-F VARIES 3'-5' VARIES 11.5'-13.5' VARIES VARIES (SEE NOTE 2) 2% AND VARIES (SEE NOTE 2) 2% AND VARIES AB K AB DGE (H)\* (2) PROPOSED TYPICAL SECTION

FOURTH AVENUE

STA. 35+50 TO STA. 42+35

Clorba Group, Inc.

CONSULTING ENGINEERS
5507 North Cumberland Avenue, Suite 402 Chicago, Illinois 60856
Tei. 773.775.4009 Fax 773.775.4014 Email chicago@clorba.com

VILLAGE OF LIBERTYVILLE FOURTH AVENUE IMPROVEMENTS

TYPICAL SECTIONS FOURTH AVENUE

SCALE: N.T.S.
DATE: JANUARY, 2005

DRAWN BY: JCC CHECKED BY: MRJ

\* AT LOCATIONS IN THE FIELD DETERMINED BY THE ENGINEER