

FAP NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
750	(114) Y, WRS	FAYETTE		8
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT NO.		


CONTRACT NO. 94962

PAVING SCHEDULE

STATION TO STATION	LENGTH LIN FT	AVE PAVT WIDTH FEET	AREA SQ YD	EARTH EXCAVATION (WIDENING) CU YD	PCC BASE COURSE WIDENING 9" SQ YD	BITUMINOUS MATERIALS (PRIME COAT) GAL	AGGREGATE (PRIME COAT) TON	BITUMINOUS SURFACE REMOVAL - BUTT JOINT SQ YD	TEMPORARY RAMP SQ YD	AGGREGATE SHOULDERS, TYPE B TON	AGGREGATE SHOULDERS, TYPE B 6" SQ YD	BITUMINOUS SHOULDERS 8" SQ YD	BITUMINOUS CONCRETE BASE COURSE WIDENING 9" SQ YD	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C" N 50 TON	LEVELING BINDER, MACHINE METHOD, SUPERPAVE, N50 TON
1018+21.00 TO 1018+71.0	50	24	133			26.7	0.5	133.3	21.3	2.8				11.2	7.5
1018+71.00 TO 1019+50.0	79	25	219			43.9	0.9			4.5				18.4	12.3
1019+50.00 TO 1020+98.7	148.7	24	397	24.8		79.3	1.6				99.1		99.1	33.3	22.2
1020+98.71 TO 1021+51.2	52.5	24	140	8.8		28.0	0.6				6.7		35.0	11.8	8.5
1021+51.26 TO 1022+03.8	52.6	24	140	8.8		28.0	0.6				35.0		35.0	11.8	15.8
1022+03.81 TO 1026+12.6	408.8	24	1090	58.5		218.0	4.4				53.9	136.3	234.2	91.6	241.9
1026+12.60 TO 1026+76.7	64.1	24	171	10.7		34.2	0.7				42.8		42.8	14.4	19.3
1027+08.46 TO 1027+27.9	19.5	24	52	3.2		10.4	0.2				13.0		13.0	4.4	5.9
1027+27.92 TO 1028+43.2	115.3	24	308	19.2		61.5	1.2				76.9		76.9	25.8	18.6
1028+43.25 TO 1032+66.0	422.8	24	1127	64.7		225.5	4.5				203.2		281.8	94.7	63.1
1032+66.00 TO 1033+38.7	72.8	26	210	16.2	64.7	42.1	0.8							17.7	11.8
1033+38.78 TO 1033+68.3	29.6	26	85			17.1	0.3			9.5				7.2	4.8
1033+68.37 TO 1036+34.0	265.6	26	767	59.0	236.1	153.5	3.1							64.5	43.0
1036+34.00 TO 1049+37.9	1303.9	26	3767	286.9	1159.0	751.4	15.1							315.4	210.9
1049+37.90 TO 1050+26.3	88.4	VARIES	329			311.6	1.3							27.6	18.4
1050+26.31 TO 1050+76.3	50	VARIES	667			176.2	2.7	668.0	172.4					56.0	37.4
TOTALS	3224			560.8	1948	1919	38	801	194	17	531	136	818	806	741

PAVEMENT MARKING SCHEDULE

STATION TO STATION	LENGTH LIN FT	SHORT-TERM PAVEMENT MARKING FOOT	TEMPORARY PAVEMENT MARKING - LINE 4" FOOT	TEMPORARY PAVEMENT MARKING - LINE 6" FOOT	TEMPORARY PAVEMENT MARKING - LINE 12" FOOT	TEMPORARY PAVEMENT MARKING - LINE 24" FOOT	WORK ZONE PAVEMENT MARKING REMOVAL SQ FT	THERMOPLASTIC PAVEMENT MARKING - LINE 4" FOOT	THERMOPLASTIC PAVEMENT MARKING - LINE 6" FOOT	THERMOPLASTIC PAVEMENT MARKING - LINE 12" FOOT	PAINT PAVEMENT MARKING - LINE 24" FOOT	RAISED REFLECTIVE PAVEMENT MARKER EACH	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL EACH
1018+21.00 TO 1026+76.7	856	257	1790				29	1790				21	11
1027+08.46 TO 1032+88.7	580	174	1221				19	1221				15	7
1032+88.78 TO 1050+60.0	1771	531	443	163	113	30	59	443	163	113	30	45	23
PEDESTRIAN CROSSWALKS													
HICKORY ST. INTERSECTION	E. LEG			67					67				
WALNUT ST. INTERSECTION	W. LEG			64					64				
WALNUT ST. INTERSECTION	S. LEG			110					110				
TOTALS	3207	962	3454	404	113	30	107	3454	404	113	30	81	41

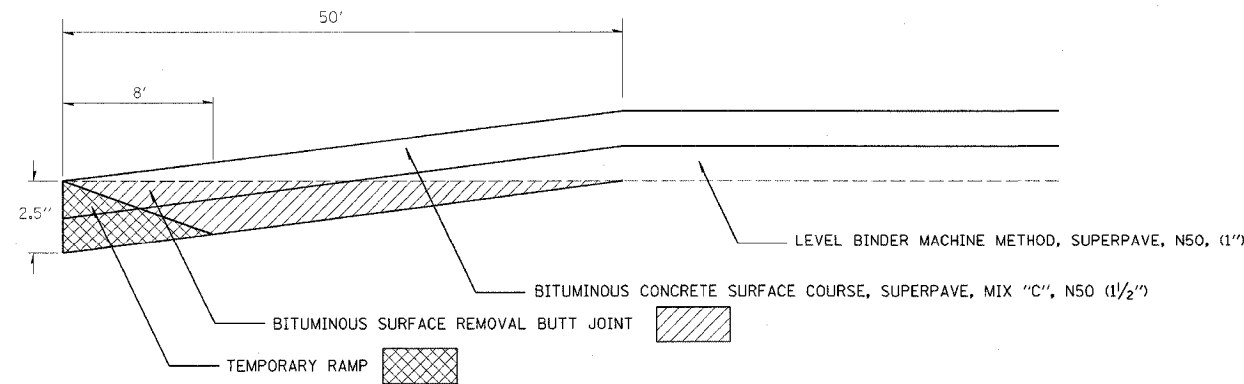

BUTT JOINT DETAIL
 STATION 1018+21 TO STATION 1018+71
 STATION 1050+26 TO STATION 1050+76

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
**PAVING & PAVEMENT
 MARKING SCHEDULES
 & BUTT JOINT DETAIL**
 SCALE: VERT. _____
 HORIZ. _____
 DATE _____ DRAWN BY _____
 CHECKED BY _____