


\$USER\$ \$DATE\$
 c:\projects\94962\d03102pa.dgn


REV: CRD

FAP ETE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
750	(114) Y. WRS	FAYETTE	25	74
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT NO.	


CONTRACT NO. 94962

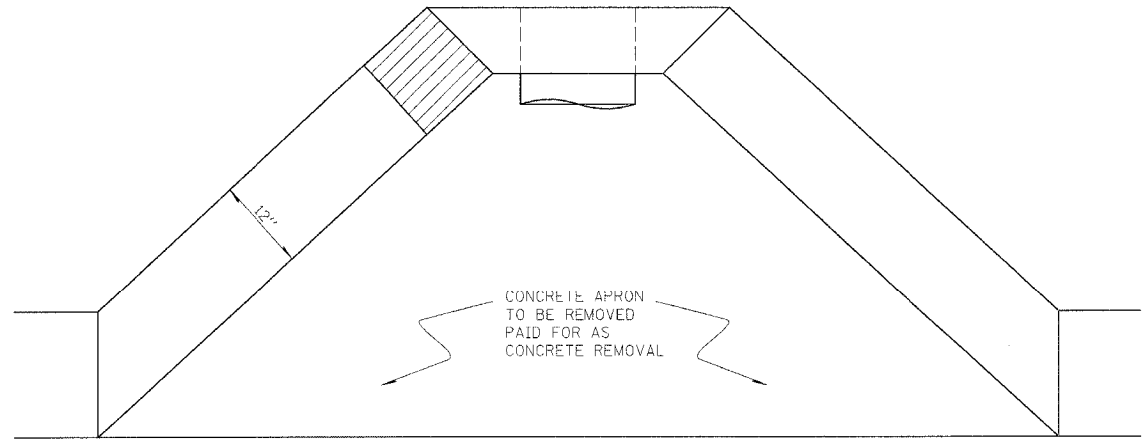


TOP VIEW

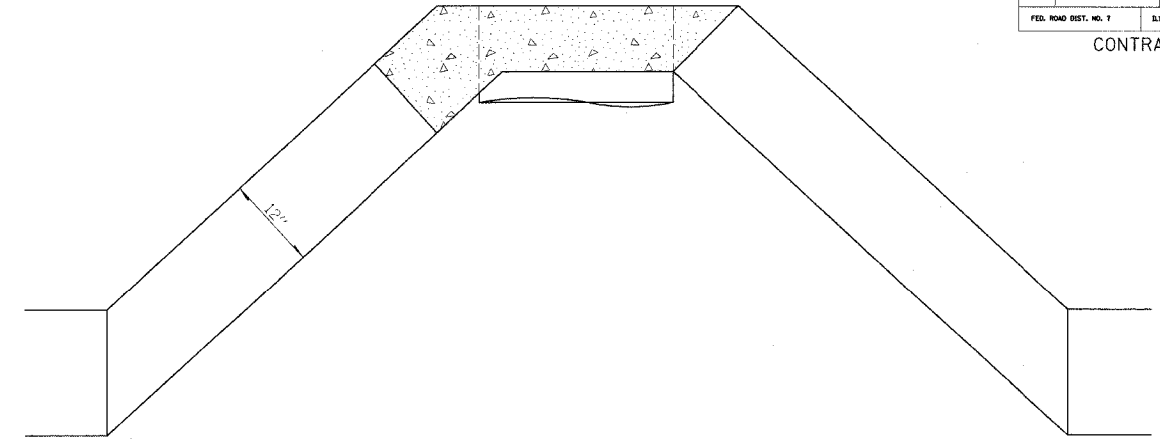

TOP VIEW

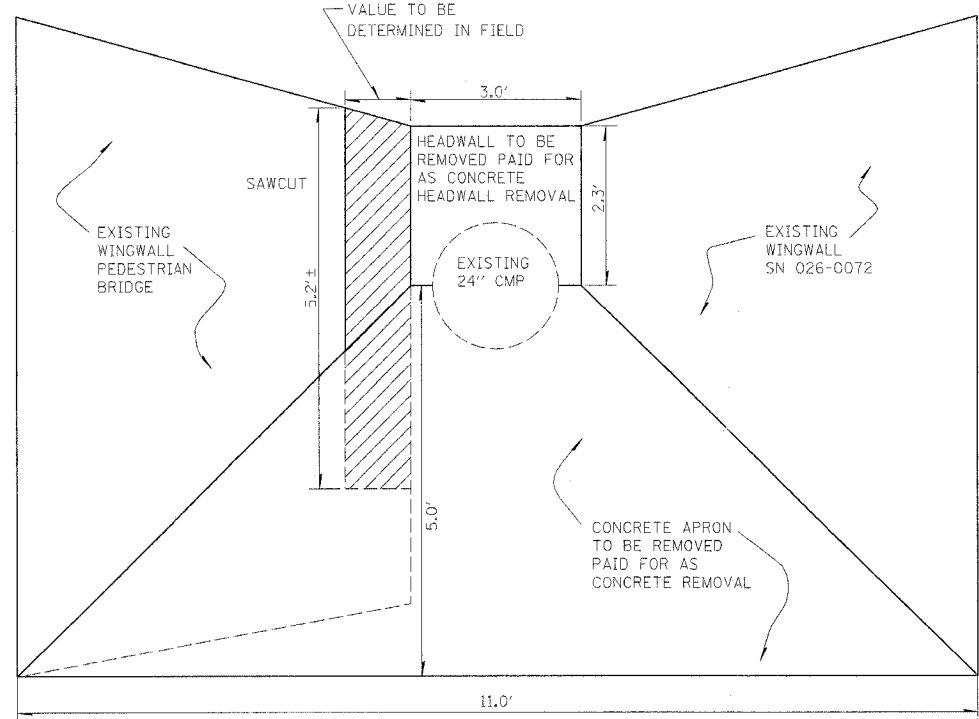

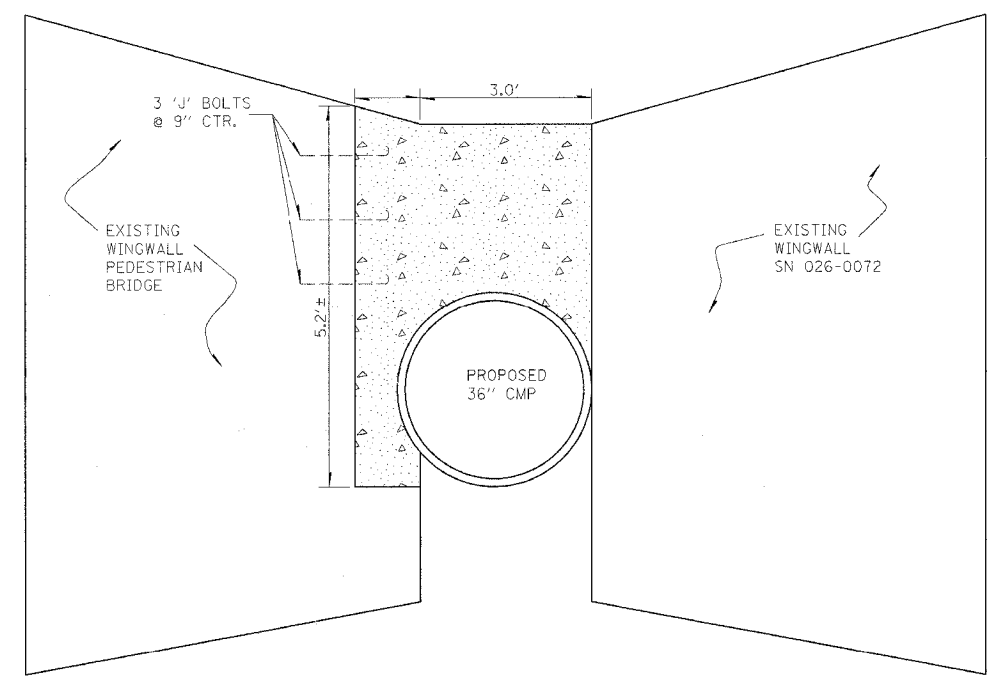

FRONT VIEW
 REMOVAL



FRONT VIEW
 CLASS SI CONCRETE

LEGEND:

-  CONCRETE REMOVAL
-  CLASS SI CONCRETE

NOTES:

ONLY THE PORTION OF THE EXISTING WINGWALL NECESSARY TO ALLOW FOR THE PLACEMENT OF THE PROPOSED STORM SEWER SHALL BE REMOVED. THE QUANTITY CALCULATED FOR THIS ITEM IS AN ESTIMATE BASED ON THE PROPOSED STORM SEWER ELEVATION. THE ACTUAL DIMENSIONS AND QUANTITY OF REMOVAL SHALL BE DETERMINED BY THE RESIDENT. THIS WORK WILL BE PAID FOR UNDER THE ITEM "CONCRETE REMOVAL" AND SHALL INCLUDE THE COST OF THE EXCAVATION, SAWCUTTING, REMOVAL AND ANY OTHER WORK NECESSARY TO COMPLETE THE ITEM.

AFTER THE STORM SEWER HAS BEEN PLACED THE CONTRACTOR SHALL RECONSTRUCT THE HEADWALL AS SHOWN. THIS WORK WILL BE PAID FOR UNDER THE ITEM "CLASS SI CONCRETE" AND WILL INCLUDE THE COST OF THE "J" BOLTS.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
**CONCRETE REMOVAL &
 HEADWALL DETAIL**
STA 1033+73
28' LT
 SCALE: VERT. DRAWN BY
 HORIZ. CHECKED BY
 DATE

c:\projects\94962\d03102pa.dgn
 teosleyck*_DATE_