OL006



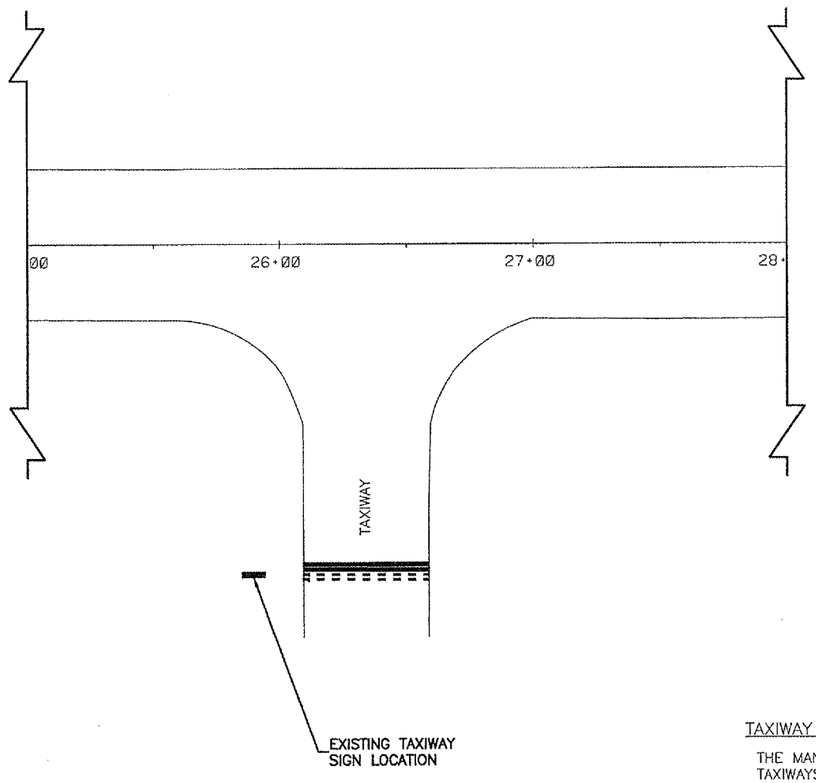

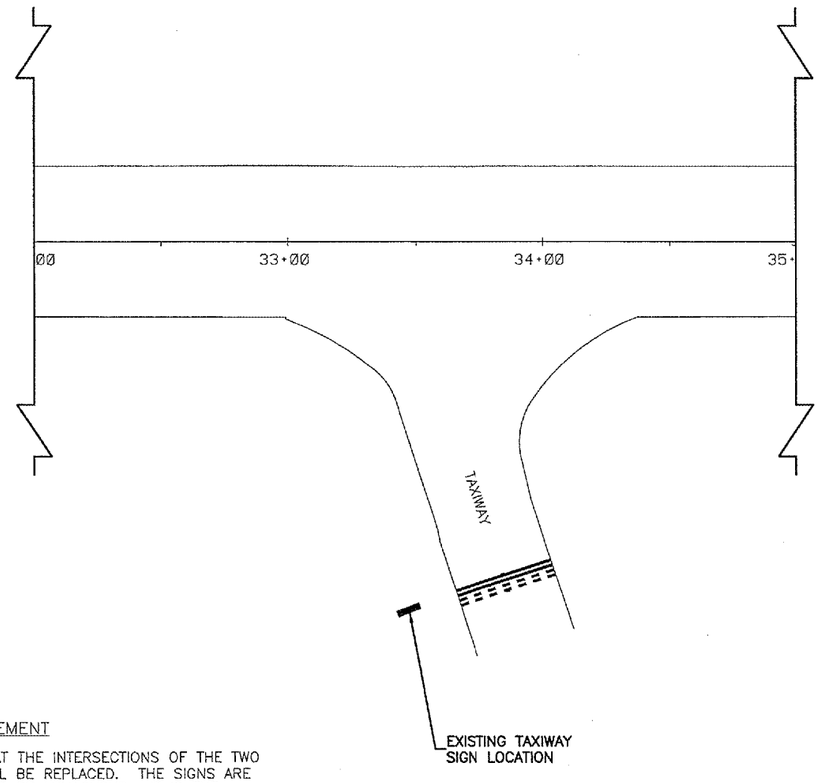

TAXIWAY SIGN PANEL REPLACEMENT

THE MANDATORY TAXIWAY SIGNS AT THE INTERSECTIONS OF THE TWO TAXIWAYS AND RUNWAY 3-21 WILL BE REPLACED. THE SIGNS ARE BELIEVED TO BE MANUFACTURERED BY LUMACURVE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THE MANUFACTURER OF THE SIGNS.

THIS ITEM WILL CONSIST OF REPLACING FOUR SIGN PANELS. TWO WILL BE SOLID BLACK. TWO OTHERS WILL HAVE A RED BACKGROUND WITH A WHITE BORDER AND THE RUNWAY DESIGNATION (3-21) IN WHITE LETTERING. STANDARDS FOR AIRPORT SIGN SYSTEMS WILL APPLY. THESE CAN BE FOUND IN ADVISORY CIRCULAR 150/5340-18D.

THIS ITEM WILL BE PAID FOR UNDER:
AR800530 TAXIWAY SIGN PANEL REPLACEMENT .....4 EACH

DATE | REVISION | BY

OLNEY-NOBLE AIRPORT
OLNEY, ILLINOIS
RICHLAND COUNTY

IL. PROJ.: OLY-3438 A.I.P. PROJ.: 3-17-0076-B7

HSL Project No. 820-05RWY
Filename R-101ELEC.DGN
Scale 1" = 30'
Date 02/03/05

LAYOUT	JAC	02/03/05
DRAWN	JAC	02/03/05
REVIEWED	CAH	05/13/05

HANSON

Hanson Professional Services Inc.
4227 Earth City Expressway, Suite 130
St. Louis, MO 63045-1306
Offices Nationwide

REHABILITATE
RUNWAY 3/21

PROPOSED
TAXIWAY SIGN
PANEL REPLACEMENT

19
19 of 36 sheets

mew
I:\Airports\OLNEY\820-05RWY\Airport\Sheets\R-101ELEC.dgn 05\16\2005, 01:25 PM