





CABLE TO GROUND ROD






TAP CONDUCTOR SHALL BE ROUTED IN THE DIRECTION TOWARDS THE NEAREST GROUND







CABLE TO CABLE HORIZONTAL PARALLEL TAP


CABLE TO SURFACE

CABLE TO REBAR

## DETAIL NOTES

- 1. ALL BELOW GRADE CONNECTIONS TO GROUND RODS & GROUND RING CONDUCTORS SHALL BE EXOTHERMIC WELD TYPE CONNECTIONS. EXOTHERMIC WELDS SHALL BE CADWELD AS MANUFACTURED BY ERICO PRODUCTS, SOLON, OHIO. ULTRAWELD AS MANUFACTURED BY HARGER LIGHTNING PROTECTION & GROUNDING EQUIPMENT, GRAYSLAKE, IL, OR THERMOWELD AS MANUFACTURED BY CONTINENTAL INDUSTRIES, TULSA, OKLAHOMA. VERIFY PROPER SIZES, MOLDS, TYPES, AND REQUIREMENTS FOR THE RESPECTIVE APPLICATION WITH THE MANUFACTURER, AND INSTALL PER THEIR DIRECTIONS.
- 2. FOR APPLICATIONS TO GALVANIZED STEEL OR PAINTED STEEL, REMOVE GALVANIZING AND/OR PAINT & CLEAN THE SURFACE TO EXPOSE BARE STEEL BEFORE MAKING EXOTHERMIC WELD CONNECTION.
- 3. Individual grounding electrode conductors shall not be installed in metal conduit. Install grounding electrode conductors in sched 40 PVC conduit as required in Foundations, for protection, where entering enclosures, etc. Where Plastic conduit is used for individual ground WIRES, DO NOT COMPLETELY ENCIRCLE THE CONDUIT WITH FERROUS AND/OR MAGNETIC MATERIALS. WHERE METAL CLAMPS ARE INSTALLED USE NYLON BOLTS, NUTS, WASHERS, & SPACERS TO INTERRUPT A COMPLETE METALLIC PATH FROM ENCIRCLING THE CONDUIT.

EXOTHERMIC WELD DETAILS

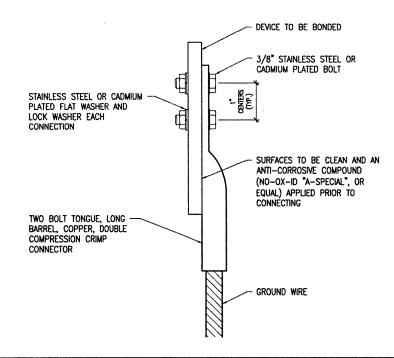


2 HOLE LONG BARREL COMPRESSION LUG TABLE									
WIRE SIZE	BURNDY CAT. NO.	THOMAS & BETTS CAT. NO.	PENN-UNION CAT. NO.						
#6 AWG STRANDED	YA6C-2TC38	256-30695-1158	BBLU-6D-2TC38						
#4 AWG STRANDED	YA4C-2TC38	256-30695-1159	BBLU-4D-2TC38						
#2 AWG STRANDED	YA2C-2TC38	256-30695-1160	BBLU-2D-2TC38						
#2 AWG SOLID	YA3C-2TC38	256-30695-1160	BBLU-3D-2TC38						
#1/0 AWG STRANDED	YA25-2TC38	256-30695-1162	BBLU-1/0D-2TC38						
#2/0 AWG STRANDED	YA26-2TC38	256-30695-1116	BBLU-2/0D-2TC38						
#3/0 AWG STRANDED	YA27-2TC38	54816BE	BBLU-3/0D-2TC38						
#4/0 AWG STRANDED	YA28-2TC38	256-30695-1117	BBLU-4/0D-2TC38						

## NOTES

- ALL CONNECTIONS TO GROUND BUS BAR SHALL BE WITH 2 HOLE TONGUE LONG BARREL COMPRESSION LUGS BOLTED TO THE BUS BAR.
- GROUND WIRE CONNECTIONS TO EQUIPMENT SHALL BE WITH 2 HOLE TONGUE LONG BARREL COMPRESSION LUGS BOLTED TO THE DEVICE OR WITH THE RESPECTIVE EQUIPT MANUFACTURER'S LUG OR TERMINAL WHERE
- GROUNDING ELECTRODE CONDUCTORS, BONDING JUMPERS, & INDIMDUAL GROUND WIRES SHALL NOT BE INSTALLED IN METAL CONDUIT. WHERE PLASTIC CONDUIT IS USED FOR INDIVIDUAL GROUND WIRES, DO NOT COMPLETELY ENCIRCLE THE CONDUIT WITH FERROUS AND/OR MAGNETIC MATERIALS. WHERE METAL CLAMPS ARE INSTALLED USE NYLON BOLTS, NUTS, WASHERS, & SPACERS TO INTERRUPT A COMPLETE METALLIC APTH FROM ENCIRCLING THE CONDUIT.
- ALL CONNECTIONS SHALL BE COATED WITH A CORROSION PREVENTATIVE COMPOUND (SANCHEM INC. NO-OX-ID "A-SPECIAL". BURNDY PENETROX E, OR EQUAL) BEFORE JOINING. ALL COPPER BUS BARS SHALL BE CLEANED PRIOR TO MAKING CONNECTIONS TO REMOVE SURFACE OXIDATION. CLEAN SURFACES, OF RESPECTIVE DEVICES TO BE BONDED, TO BARE METAL, PER NEC 250-12.

GROUNDING LUG CONNECTION DETAIL

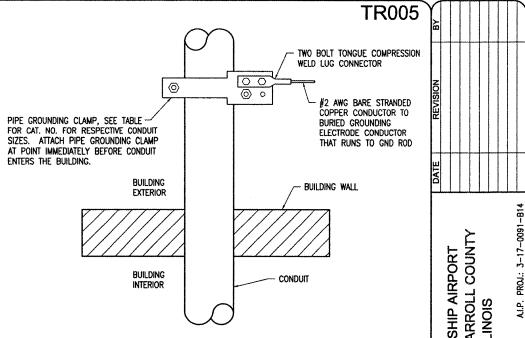

PIPE GROUNDING CLAMP TABLE						
BURNDY CAT. NO.	CONDUIT SIZE					
GAR3902TC	1/2" - 1"					
GAR3903TC	1 1/4" - 2"					
GAR3904TC	2 1/2" - 3 1/2"					
GAR3905TC	4" - 5"					
GAR3906TC	6"					
GAR3907TC	8"					

- EXTERIOR CONDUIT GROUNDING IS REQUIRED FOR THE PHOTOCELL CONDUIT, RADIO ANTENNA CONDUIT, & OTHER CONDUITS EXTENDING TO THE ROOF LEVEL.
- CONNECTIONS TO BURIED GROUNDING ELECTRODE CONDUCTOR SHALL

EXTERIOR CONDUIT GROUNDING DETAIL

β¥									
REVISION									
DATE									
		IN-IOWNALIT AIRTORI	VEHICLE LOCATION CHINALIAN	ことのこうしょうととなった。 くろいろくし	SIONI				02/08/08   IL. PROJ.: SFY-3782 AJ.P. PROJ.: 3-17-0091-814
									<u>_</u>
440 0800	2000					01/02/08	04/00/10	01/07/00	05/08/08
157	À,					١,			



CONSTRUCT NEW VAULT