

GROUNDING SYSTEM


1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR TYPE XLP. NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN RACEWAYS. THE GROUNDING CABLE SHALL BE INSTALLED IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED. ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE (HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.). GROUND ROD SHALL BE 3/4" DIA. x 10'-0" (20mm x 3.0m) LONG, COPPER CLAD, ONE GROUND ROD SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS, CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS, THE RESIDENT ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC. ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT

2. THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.

- 3. ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS IN THE CONTROLLER CABINET.
- 4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.








3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL)

ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED. • GROUND CABLE SHALL BE LOOPED OVER HOOKS IN THE HANDHOLES 6.5' (2.0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13' (4.0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES. 5' (1.4m) OF SLACK SHALL BE PROVIDED BETWEEN FRAME AND COVER.

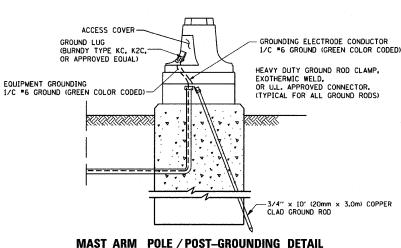



(NOT TO SCALE) TS-4 of 39 ILLINOIS DEPARTMENT OF TRANSPORTATION

DISTRICT ONE STANDARD TRAFFIC SIGNAL DESIGN DETAILS

> SCALE: NONE DATE: 2/15/2006

NOTES:

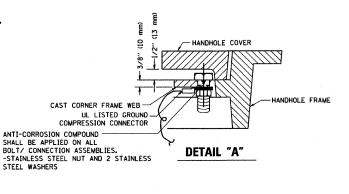



ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE)

NOTES:

1. ELECTRIC SERVICE PANELS SHALL BE CONSTRUCTED TO U.L. STD 508,

TRAFFIC SIGNAL

CIRCUIT

BREAKER

NEUTRAL

9

CONTROLLER CABINET

INDUSTRIAL CONTROL PANEL, AND CARRY THE U.L. LABEL.

2. ALL WIRING SHALL BE NEATLY DRESSED AND SUPPORTED.

SERVICE INSTALLATION POLE MOUNT (SHOWN)

0

-60A. MAIN

DISCONNE

DISCONNECT

-STANDOFF

-PANELBOARD

FUSE, KLKR 1/4 A

-LOCK, HASP

-- PADLOCK, FURNISHED BY CONTRACTOR, KEYED TO

-1 1/4" (30mm) DIA, COUPLING

-SECONDARY ELECTRICAL

-1/C GROUND (GREEN COLOR CODED)


SERVICE BY UTILITY CO.

-STRAIN RELIEF COUPLING


-2/C (NEUTRAL-WHITE, PHASE-BLACK)

DISTRICT 1 REQUIREMENTS

COMPRESSION LATCH, TYP. (2 MIN. REO'D)

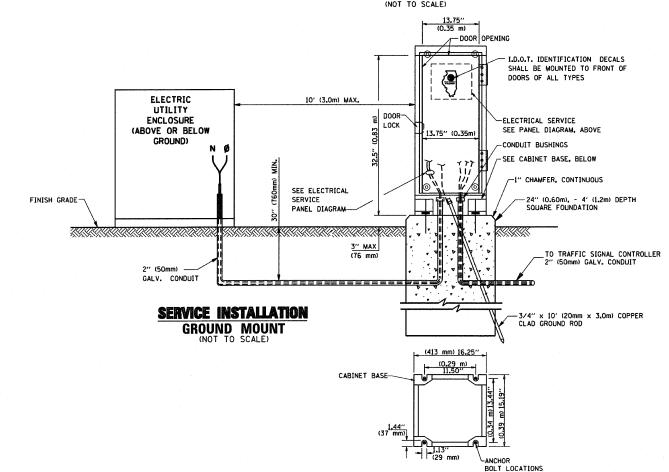


CABINET - BASE BOLT PATTERN

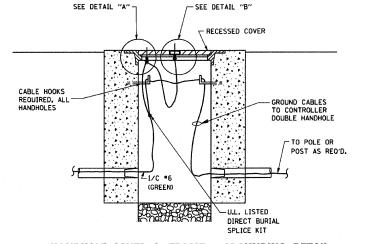

HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

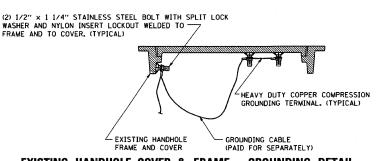

EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

MOUNTING PLATE

MANUFACTURER

DIMENSIONS 1. 6" x W 12" x H 14"

POWER INDICATOR LIGHT -INTERNALLY MOUNTED FOR— GROUND MOUNTED SERVICE

FABRICATION

TOP & BOTTOM AS PER-

CABINET, SHEET ALUMINUM

CONTINUOUS PIANO HINGE-

CABINET OUTSIDE

TO GROUND ROD-

3/4" (20mm) GALV. CONDUIT

(SEE ALL CABLE PLAN, FOR ALL CABLE SIZES)

1/C *6 (GREEN)

ELECTRICAL SERVICE TO

TRAFFIC SIGNAL CONTROLLER

SURGE ARRESTOR

CONNECTOR, TYP.