

METER TROUGH WITH MAIN DISCONNECT FACTORY INSTALLED

(SEE CONSTRUCTION NOTE 4)

CUSTOMER FURNISHES, INSTALLS AND MAINTAINS

- 1. 100T ELECTRIC SERVICE GROUND MOUNTED CABINET
- 2. METER TROUGH: A DEVICE THE METER PLUGS INTO WITH A REMOVABLE UPPER PROTECTIVE COVER.
- 3. DISCONNECTING MEANS: THE FACTORY INSTALLED MAIN DISCONNECT WITH PAD LOCK INSTALLED.
- 4. DRIVEN GROUND: A SAFETY CONNECTION TO PROVIDE AN ELECTRICAL PATH TO EARTH (8' x %" COPPER CLAD). SEE CHART BELOW.
- 5. ELECTRICAL SERVICE WIRE (CONTRACTOR INSTALLED) PER NEC REQUIREMENTS.
- NOTE: ALL HARDWARE MUST BE 3/4" GALVANIZED OR STAINLESS STEEL (NO ZINC ALLOWED).

DPU-E FURNISHES, INSTALLS, AND MAINTAINS


6. METER: A DEVICE THAT MEASURES THE AMOUNT OF ELECTRICITY USED BY A CUSTOMER.


COPPER EX	FERNAL	GROUNDING	WIRE	SIZES
60-100AMP	* 8			
150AMP	# G			
200AMP	*4			

COPPER	SERVICE	ENTRANCE	WIRE	SIZES
60AMP	*6	~~~~~		****
100AMP	* 3			
150AMP	1/0			
200AMP	3/0			

RULES FOR CONNECTING TO DPU-E EQUIPMENT

- A. SERVICE MUST BE TRENCHED IN AT A DEPTH OF 24" AND A TRENCH INSPECTION MUST BE DONE BEFORE BACKFILL IS COMPLETED (CALL 630-420-6082) TO SCHEDULE AN INSPECTION WITH TEO).
- B. AN 8' COIL OF WIRE MUST BE LEFT AS CLOSE TO THE SIDE OF THE TRANSFORMER OR PEDESTAL AS POSSIBLE FOR DPU-E TO CONNECT.
- C. NO GROUND WIRES ARE ALLOWED IN DPU-E EQUIPMENT.
- D. METER TROUGH TO BE LOCATED 5'-15' FROM DPU-E POINT OF ATTACHMENT.
- E. METER TROUGH ASSEMBLY SHALL BE AT LEAST 5' FROM EXCAVATION.
- F. MAY BE USED FOR TEMPORARY ELECTRIC SERVICE.

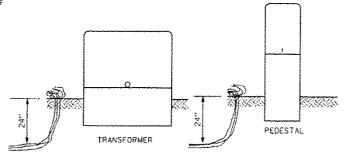

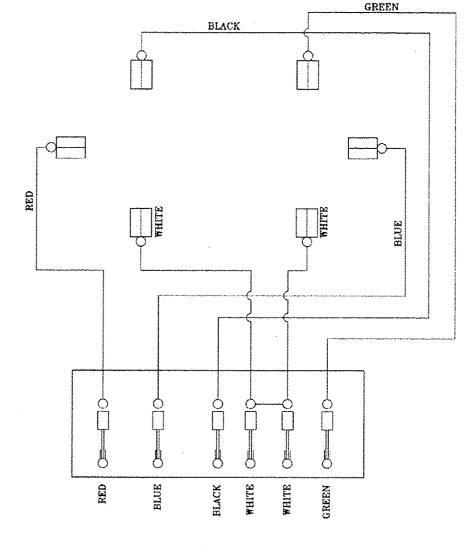

NOTES:

- 1. HEIGHT TO CENTER OF METER MUST BE BETWEEN 40"-60".
- 2. METER SOCKET MUST BE LABELED WITH ADDRESS (INCLUDING SUITE #) WITH 1" PERMANENT LABELS (NO MARKER).
- 3. 1" CONTINUOUS CONDUIT (NO CONDULETS) FROM TRANSFORMER CABINET TO METER SOCKET.

NAPERVILLE PUBLIC	METER SOCKET FOR INSTRUMENT	DATE: 06-24-04
UTILITIES DEPARTMENT	TRANSFORMER INSTALLATIONS	
ELECTRIC STANDARDS	1¢, 3 WIRE, 6 TERMINAL OVER 200A	. 5 - 6,93

CONSTRUCTION NOTES

- 1. THE ELECTRIC METER TROUGH AND ELECTRIC METER SOCKET SHALL BE SUPPLIED AND INSTALLED BY THE CONTRACTOR. THE ELECTRIC METER TROUGH AND ELECTRIC METER SOCKET SHALL BE IN ACCORDANCE WITH NAPERVILLE ELECTRIC'S REQUIREMENTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATION WITH NAPERVILLE ELECTRIC FOR THESE ITEMS PRIOR TO ORDERING OR INSTALLING METERING EQUIPMENT.
- 2. NAPERVILLE ELECTRIC WILL SUPPLY THE ELECTRIC METER TO BE INSTALLED BY THE CONTRACTOR.
- 3. CONTRACTOR SHALL SUBMIT SHOP DRAWINGS FOR THE SUPPORTS AND ATTACHMENT PLANS FOR APPROVAL BY THE ENGINEER. THE ELECTRIC METER HOUSING SHALL BE INSTALLED FLUSH WITH THE TOP OF THE ELECTRIC SERVICE GROUND MOUNT CABINET.

4. ALL WORK SHOWN IN THIS DETAIL SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR SERVICE INSTALLATION - GROUND MOUNTED.

FILE SAME DESIGNED PUO REVISED - ADDENDUM A 12/17/2012 fillit DRAWN KES REVISED - ADDENDUM B S/31/2013 PLOT SCALE > #SCALE# CHECKED JCM REVISED DATE PLOS DATE A #DATE# REVISED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**



TOTAL SHEE SHEETS NO. 963 468 SECTION F.A.P. R1E. COUNTY 338 012 & 1130 WRS-5 DUPAGE TS-52 CONTRACT NO. 60131