


NOTES: 0.08 GA. ALUMINUM ALLOY SHEET LETTERING COLOR SHALL BE RED. EACH GATE

SHALL REQUIRE ONE SIGN EVERY 100' OF FENCE SHALL REQUIRE ONE SIGN

RELOCATE SIGNS ON EXISTING GATE TO NEW GATE.

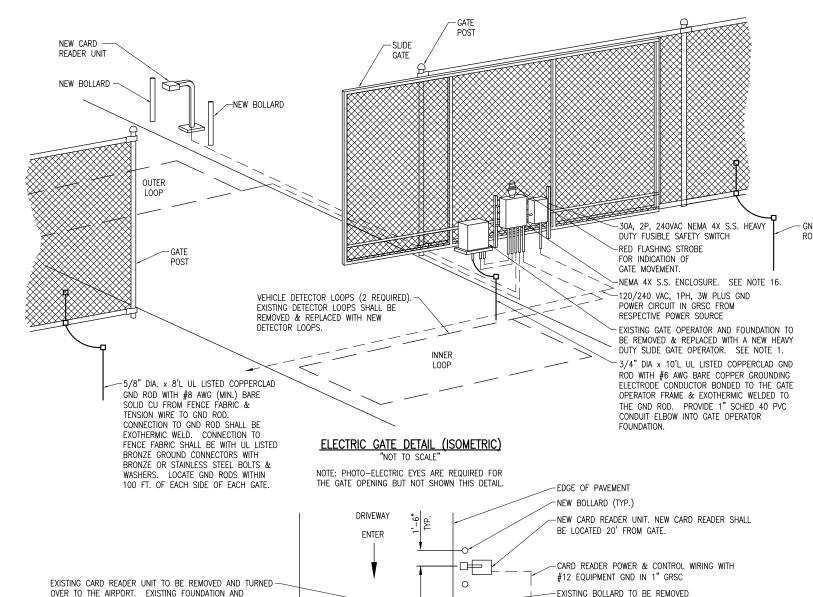

æ

20'-0"

GATF

POST

OUTER LOOP

INNER LOOP

FXIT

AIRPORT ACCESS

ELECTRIC GATE PLAN

"NOT TO SCALE

BOLLARDS SHALL BE REMOVED AND DISPOSED OF IN A

INFRARED PHOTO-ELECTRIC EYE WITH MOUNTING POST

PHOTO-ELECTRIC EYE CONTROL

BORE BELOW PAVEMENT AND/OR

SAW CUT & REPAIR

 $^{\prime}$ 5/8" dia. x 8'l ul listed copperclad gnd rod with

#8 AWG (MIN.) BARE SOLID CU FROM FENCE FABRIC &

SHALL BE EXOTHERMIC WELD. CONNECTION TO FENCE

CONNECTORS WITH BRONZE OR STAINLESS STEEL BOLTS

FABRIC SHALL BE WITH UL LISTED BRONZE GROUND

& WASHERS. LOCATE GND RODS WITHIN 100 FT. OF

EACH SIDE OF EACH GATE.

TENSION WIRE TO GND ROD. CONNECTION TO GND ROD

WIRING IN 3/4" GRSC DIRECTIONAL

EXISTING EXIT CARD -

READER TO BE REMOVED

GATE POST-

0

0

LEGAL MANNER. (TYP. FOR 2)

NOTES:

- SEE SPECIAL PROVISION SPECS FOR REQUIREMENTS ON RESPECTIVE GATE & GATE OPERATOR SYSTEM.
- ALL DIMENSIONS AND LAYOUT INFORMATION SHOWN SHOULD BE ADJUSTED AS RECOMMENDED BY THE MANUFACTURER. SEE RESPECTIVE SITE PLAN FOR FACH GATE
- CONCRETE FOUNDATIONS SHALL BE PROVIDED FOR THE SLIDE GATE OPERATOR AND THE CARD READER CONTROL UNIT. FOUNDATION FOR THE GATE OPERATOR SHALL BE 48" (MIN.) IN DEPTH AND OF THE SIZE RECOMMENDED BY THE MANUFACTURER. FOUNDATION FOR THE CARD READER ACCESS CONTROL UNIT SHALL EXTEND APPROX. 24" ABOVE GRADE TO ACCOMMODATE SNOW FALL.
- 1" GRS CONDUIT WILL BE REQUIRED BETWEEN THE SLIDE GATE OPERATOR INSTALLATION AND THE CARD READER ACCESS CONTROL UNIT, THE PHOTO-ELECTRIC EYES, AND THE DETECTOR LOOPS. THE MINIMUM BURYING DEPTH IS 24". ALL METAL CONDUITS ENTERING THE GATE OPERATOR SHALL BE BONDED TO THE GATE OPERATOR FRAME WITH A #8 AWG (MIN.) COPPER BONDING JUMPER. CONFIRM CONTROL WIRING REQUIREMENTS WITH THE RESPECTIVE GATE OPERATOR SALES AND SERVICE REPRESENTATIVE.
- THE GUARD/BOLLARD POSTS SHALL BE 6.625" DIA. STEEL (HEAVY WALL) PIPE, CONCRETE FILLED, AND SHALL EXTEND FROM THE TOP OF THE CARD CONTROL UNIT TO A DEPTH OF 48" BELOW THE GROUND LINE. THE CONCRETE FOOTER DIMENSION SHALL BE AS DETAILED HEREIN. GUARD/BOLLARD POSTS SHALL BE PAINTED WITH YELLOW COLORED ENAMEL FINISH.
- THE SLIDING GATE SHALL BE CANTILEVER TYPE OF THE SIZE CALLED FOR ON THE PLANS, SHALL HAVE AN ENCLOSED ROLLER ASSEMBLY WHICH IS PROTECTED FROM FREEZING RAIN AND SNOW, AND SHALL BE AS MANUFACTURED BY TYMETAL CORPORATION OR APPROVED EQUAL.
- (RESERVED).

-EXISTING BOLLARD TO BE REMOVED

LEAD-IN WIRING (TYP. EACH LOOP)

PROVIDE 1" GRSC FROM ENCLOSURE/GATE

-NEMA 4X S.S. ENCLOSURE. SEE NOTE 16.

-30A, 2P, 240VAC NEMA 4X S.S. HEAVY DUTY FUSIBLE SAFETY SWITCH

-CHAIN LINK FENCE

120/240 VAC, 1PH, 3W PLUS GND POWER CIRCUIT

IN 1" GRSC FROM RESPECTIVE POWER SOURCE.

- NEW SLIDE GATE TO

DIRECTIONAL BORE BELOW PAVEMENT.

REPLACE EXISTING

- FXISTING GATE OPERATOR AND FOUNDATION TO BE

REMOVED & REPLACED WITH A NEW HEAVY DUTY

POWER & CONTROL CONDUITS TO GATE

BE IN A SEPARATE DEDICATED CONDUIT.

SLIDE GATE OPERATOR. SEE NOTE 1

3/4" DIA x 10'L UL LISTED COPPERCLAD GND ROD

WITH #6 AWG BARE COPPER GROUNDING ELECTRODE

FRAME & EXOTHERMIC WELDED TO THE GND ROD.

PROVIDE 1" SCHED 40 PVC CONDUIT ELBOW INTO

CONDUCTOR BONDED TO THE GATE OPERATOR

GATE OPERATOR FOUNDATION

OPERATOR. 240 VAC POWER FEED SHALL

OPERATOR TO PAVEMENT EDGE FOR LOOP DETECTOR

PHOTO-ELECTRIC EYE CONTROL WIRING IN 3/4" GRSC

- CONTRACTOR SHALL COORDINATE ANY POWER OUTAGES TO EXISTING EQUIPMENT WITH THE RESPECTIVE OWNER'S REPRESENTATIVE AND THE AIRPORT
- INCLUDE AC SURGE PROTECTOR FOR THE GATE OPERATOR, UL 1449 LISTED, SURGE CURRENT RATING OF 40KA, SUITABLE FOR USE ON A 120/240 VAC, 1 PHASE 3 WIRE SYSTEM WITH LED INDICATING OPERATIONAL STATUS, JOSLYN MODEL 1265-21, SQUARE D CAT. NO. TVS120XR50S OR APPROVED EQUAL.
- CONCRETE USED FOR INSTALLING THE GATE OPERATOR, CARD READER, & FENCE SHALL MEET THE REQUIREMENTS OF STRUCTURAL PORTLAND CEMENT CONCRETE ITEM 610.
- 11. ALL ELECTRICAL EQUIPMENT SHALL BE INSTALLED IN CONFORMANCE WITH NFPA 70 - NATIONAL ELECTRICAL CODE (NEC) MOST CURRENT ISSUE IN FORCE, THE RESPECTIVE EQUIPMENT MANUFACTURER'S DIRECTIONS AND ALL OTHER APPLICABLE LOCAL CODES, LAWS, ORDINANCES, AND REQUIREMENTS IN FORCE. ANY INSTALLATIONS WHICH VOID THE UL LISTING, ETL LISTING, (OR OTHER THIRD PARTY LISTING) AND/OR THE MANUFACTURER'S WARRANTY OF A DEVICE WILL NOT BE PERMITTED.
- PROVIDE A WEATHERPROOF ENGRAVED PHENOLIC OR PLASTIC LEGEND PLATE FOR THE SAFETY SWITCH AT THE RESPECTIVE GATE OPERATOR NOTING THE GATE SERVED, VOLTAGE, AND RESPECTIVE POWER SOURCE CIRCUIT AND
- 13. PAYMENT FOR EACH SLIDE GATE, CARD READER, GATE OPERATOR, AND ALL ASSOCIATED CONTROL & SAFETY DEVICES SHALL BE ON A LUMP SUM BASIS AND SHALL BE FULL COMPENSATION FOR ALL MATERIALS, EQUIPMENT, CABLE IN CONDUIT, DUCT, OR UNIT DUCT, GROUNDING, LABOR, TOOLS, COORDINATION, TESTING, AND INCIDENTALS REQUIRED TO INSTALL THE GATE COMPLETE AND IN OPERATING CONDITION
- CONTROL CIRCUIT WIRING SHALL NOT BE ROUTED THROUGH THE SAFETY SWITCH/DISCONNECT.
- 15. INCLUDE CORROSION RESISTANT SUPPORT POSTS AND HARDWARE WITH THE PHOTO-ELECTRIC EYE SAFETY DEVICES.
- ALL CONTROL POWER TRANSFORMERS, SURGE PROTECTORS, POWER SUPPLIES, RECEPTACLES, LOOP DETECTOR AMPLIFIERS, SECONDARY SAFETY DEVICE FQUIPMENT, AND ANY OTHER ASSOCIATED CONTROLS SHALL BE INSTALLED EITHER INSIDE THE GATE OPERATOR CONTROL PANEL OR INSIDE A SEPARATE NEMA 4 STAINLESS STEEL CONTROL PANEL ENCLOSURE. WHERE THE CONTROL EQUIPMENT IS TO BE INSTALLED INSIDE THE GATE OPERATOR CONTROL PANEL THE CONTRACTOR SHALL COORDINATE THIS WITH THE GATE OPERATOR MANUFACTURER AND THE RESPECTIVE GATE OPERATOR EQUIPMENT SUPPLIER. LOCATING THESE CONTROLS OUTSIDE OF GATE OPERATOR CONTROL PANEL BUT WITHIN THE GATE OPERATOR HOUSING WILL NOT MEET THIS REQUIREMENT.



CE FENCE REPLAC PERIMETER I

30

ILLINO DECATUR,

HANSON ofessional Services Inc. 2012
South Sixth Street
Id, Illinois 62703-2886
-2450 Fax: (217) 788-2503

Spring (217) 7

김민 PROPOSED ELECTRIC GATE DETAILS - GAI