CONSTRUCTION PLANS

FOR


KEWANEE MUNICIPAL AIRPORT

KEWANEE, HENRY COUNTY, ILLINOIS

CONSTRUCT VAULT

SCOPE OF WORK

THIS PROJECT CONSISTS OF THE CONSTRUCTION OF A NEW AIRPORT ELECTRICAL VAULT WITH NEW ELECTRICAL & MECHANICAL EQUIPMENT. PROJECT INCLUDES NEW ELECTRIC SERVICE, THE REMOVAL OF THE EXISTING ELECTRICAL VAULT AND ELECTRICAL EQUIPMENT, & INTERFACING/REPLACING CABLE TO AIRFIELD LIGHTING SYSTEMS. PROJECT ALSO INCLUDES REPLACING THE EXISTING L-807 WIND CONE WITH A NEW WIND CONE, AND UPGRADES TO THE EXISTING AIRPORT ROTATING BEACON AND PLASI UNITS.

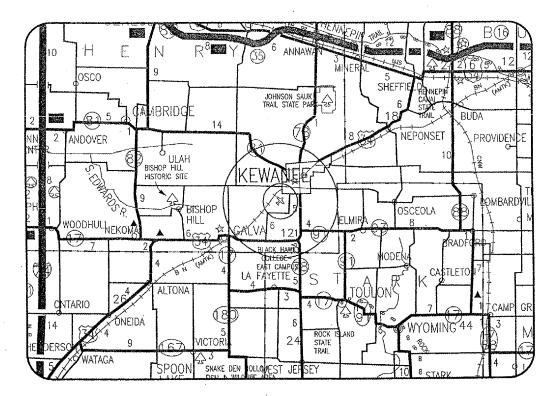

LOCATION

ILL. PROJ. EZI-3586 A.I.P. PROJ. 3-17-0058-B12

LATITUDE: 41° 12′ 19″ LONGITUDE: 89° 57′ 50″ ELEVATION: 858.0′ M.S.L. DATE: APRIL 28, 2006

KE008 **TOTAL SHEETS: 27**

PROFESSIONAL

KEWANEE AIRPORT AUTHORITY

Mmen SECRETARY PROTECT

HANSON



SUMMARY OF QUANTITIES									
ITEM NO.	DESCRIPTION	UNIT	AS AWARDED QUANTITIES	AS BUILT QUANTITIES					
AR107812	L-807 WIND CONE-12' INTERNALLY LIT	EA	1						
AR107900	REMOVE WIND CONE	EA	1						
AR108158	1/C #8 5KV UG CABLE IN UD	LF	7100						
AR108554	2/C #4 600V UG CABLE IN UD	LF	920						
AR108656	3/C #6 600V UG CABLE IN UD	LF	870						
AR108800	CONTROL CABLE	LF	560						
AR109100	CONSTRUCT ELECTRICAL VAULT	LS	1						
AR109200	INSTALL ELECTRICAL EQUIPMENT	LS	1	***************************************					
AR109901	REMOVE ELECTRICAL VAULT	LS	1	-					
AR110014	4" DIRECTIONAL BORE	LF	340	·					
AR110503	3-WAY CONCRETE ENCASED DUCT	LF	216						
AR110504	4-WAY CONCRETE ENCASED DUCT	LF	66						
AR110610	ELECTRICAL HANDHOLE	EA	3						
AR125989	REFURBISH PLASI	EA	2						
AR150540	HAUL ROUTE	LS	1						
AR800590	4/C #6 600V UG CABLE IN UD	LF	310						
AR800591	UPGRADE AIRPORT ROTATING BEACON	LS	1						
AROUGOST	OF GRADE AIR ORT ROTALING BEACOIT	- 13	<u> </u>						
······································									
				······					
				}					
~~~~				<b>-</b>					
			<u> </u>	<b></b>					
***************************************			***************************************						
	1		i	l					

	KE008	Y à					
		H					
		VISION					
	INDEX TO SHEETS	R					
HEET NO.	DESCRIPTION	— —			-		_
2	COVER SHEET SUMMARY OF QUANTITIES, INDEX TO SHEETS	DATE					
3	PROPOSED SAFETY PLAN						-
4	ELECTRICAL LEGEND AND ABBREVIATIONS EXISTING VAULT SITE PLAN	-				3	812
5	EXISTING VAULT SITE PLAN  EXISTING VAULT ELECTRICAL ONE-LINE DIAGRAM	-			δ	8	쎯
7	PROPOSED VAULT SITE PLAN	1		7	2	6	ş
8	PROPOSED ELECTRICAL PLAN TAXIWAY "A"	]		ğ	$\exists$	;	4
9 10	PROPOSED ELECTRICAL PLAN STA. 12+00 TO STA. 20+00 PROPOSED AIRPORT ELECTRICAL VAULT EQUIPMENT PLAN	-		짪	=	•	٠; زبم
11	VAULT LIGHTING AND RECEPTACLE PLAN	1		Α,	E	ģ	ర్జె
12	PROPOSED AIRPORT ELECTRICAL VAULT WALL ELEVATIONS	1		Ϋ́	$\bar{\Sigma}$	(	A.I.P. PROJ.: 3-17-0058-B12
13 14	PROPOSED VAULT ELECTRICAL ONE-LINE DIAGRAM SHEET 1 PROPOSED VAULT ELECTRICAL ONE-LINE DIAGRAM SHEET 2	-		ਨੁੱ	$\aleph$	:	¥
15	PANEL SCHEDULES & DETAILS	1		Z	≿		
16	HIGH VOLTAGE WIRING SCHEMATIC	]		₹	Ž		
17 18	AIRFIELD LIGHTING CONTROL SCHEMATIC AIRFIELD LIGHTING CONTROL SCHEMATIC CONTINUED	-		KEWANEE MUNICIPAL AIRPORT	KEWANEE, HENRY COUNTY, ILLINOIS		
19	LIGHTING CONTACTOR PANEL DETAIL	1		Ŋ	μŢ		PROJ.: EZI-3586
20	LEGEND PLATE SCHEDULE AND TRANSFORMER WIRING DIAGRAMS			≶	岁	1	7.
21	ELECTRICAL AND GROUNDING DETAILS	4		Θ	≶	i	.: []
22	WIND CONE ELEVATION DETAIL PROPOSED PLASI WIRING DETAILS & NOTES	-			(Ú		8
24	LIGHTNING PROTECTION DETAILS FOR BEACON	1			-3		ى ك
25	ELECTRICAL DETAILS	L					_
26 27	ELECTRICAL NOTES SHEET 1 ELECTRICAL NOTES SHEET 2	-			30	3 8	90/
<u></u>	LLCOMOR NOLO SILCI Z	1	ပ္		30/21/00	<u>[</u> (22) [	2
			R-002FLP.DWG	ا ايد	2	\$ 2	ş
		15		5,		11	
		- 1 6	8	2 ₹	2	#   <b>3</b>	C.A.H.
		810-06VLTD	<u>.</u>	04/28/06	}	۱	ن
		- 2		0		11,	_
		Project	fkenome		TANOUR	RAWN	VIEWED
		] 🖫	Filenc	Scole Sorte	3		Æ
		┢			L.	ТТ.	
		-	Z	_			
		1		ָ	ğ		
		-	<u> </u>	3	ses	8214	
		1		7	Serv	ma 4	
		]	HANGON	=	iona	hdianapolis, Indiana 46214 Offices Nationwide	
		-	ىلىپىر سىر	-	oress	polis, ices 3	
		1	<b>~0</b>	1:	on Pa	gang Gang	
		1	W	7	Hans	Ē	
		-	V				
		+-					
		] ,			٠,٠,٠		
		.] :	_		띨		
		-  :	A		<u> </u>	TS	
		1 :	>		Ν	岀	
		] {	5		ğ	<u>က်</u>	
		-  ;	⊋		P	2	
		-			꿆	INDEX TO SHEETS	
		] :	ž		Σ	볼	
		4	CONSTRUCT VAULT		SUMMARY OF QUANTITIES,	_	
		∖՝	J		Ñ		
	AND THE RESERVE OF THE PROPERTY OF THE PROPERT	+-	******				
					)		

## SCOPE OF WORK

THE PROPOSED IMPROVEMENTS INCLUDE THE CONSTRUCTION OF A NEW ELECTRICAL VAULT, REMOVAL OF THE EXISTING ELECTRICAL VAULT, GROUNDING UPGRADES TO AND REFURBISHMENT OF AIRFIELD EQUIPMENT, REMOVAL AND REPLACEMENT OF PRIMARY WIND CONE, AND MODIFICATIONS TO THE ROTATING BEACON.

#### CONTRACTOR'S RESPONSIBILITIES

THE CONTRACTOR MUST FOLLOW PROCEDURES ON THIS SHEET THAT ASSURES SAFE OPERATING CONDITIONS FOR AIRCRAFT AS WELL AS HIS PERSONNEL AND EQUIPMENT. THE AIRPORT MANAGER WILL AT ALL TIMES HAVE JURISDICTION

IDENTIFICATION - THE CONTRACTOR IS REQUIRED TO MARK ALL VEHICLES AND EQUIPMENT USED FOR CONSTRUCTION WITH 3 FT. SQUARE, INTERNATIONAL ORANGE AND WHITE CHECKERED FLAGS ANYTIME THEY ARE ON AIRPORT PROPERTY.

ALL CONTRACTOR PERSONNEL SHALL HAVE IDENTIFICATION MAKING IT OBVIOUS THAT THEY ARE A PART OF THE CONSTRUCTION CREW.

THE CONTRACTOR, HIS EMPLOYEES, AND EQUIPMENT SHALL BE RESTRICTED TO THE PROJECT WORK AREA.

RADIO CONTROL - THE CONTRACTOR IS REQUIRED TO BE IN TWO-WAY RADIO CONTACT WITH THE KEWANEE MUNICIPAL AIRPORT UNICOM (122.80 MHZ) WHENEVER HIS PERSONNEL ARE ON THE AIRPORT PROPERTY.

EQUIPMENT PARKING AND STORAGE - THE CONTRACTOR'S EQUIPMENT PARKING, MATERIAL STORAGE, AND EMPLOYEE PARKING WILL BE AT THE LOCATION SHOWN ON THIS DRAWING. ONLY VEHICLES AND EQUIPMENT NECESSARY FOR CONSTRUCTION WILL BE PERMITTED TO LEAVE THESE AREAS.

THE CONTRACTOR IS REQUIRED TO LIMIT THE USE OF CONSTRUCTION EQUIPMENT ON THE EXISTING PAYEMENTS. ONLY EQUIPMENT NEEDED TO COMPLETE THE SPECIFIC WORK ON THE EXISTING PAVEMENT WILL BE PERMITTED. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY DAMAGE TO EXISTING PAVEMENTS CAUSED BY HIS PERSONNEL OR

NO OPEN HOLES OR TRENCHES WILL BE ALLOWED WITHIN 200' OF AN ACTIVE RUNWAY, WITHIN 40' OF AN ACTIVE TAXIWAY OR TAXILANE, NOR WILL EITHER HOLES OR OPEN TRENCHES BE ALLOWED TO REMAIN EXPOSED OR OPEN OVER

#### TRAFFIC CONES

TRAFFIC CONES WILL BE USED ON A CLOSED RUNWAY FOR TRAFFIC CONTROL IN LIEU OF BARRICADES.

J.U.L.I.E. INFORMATION

HENRY

KEWANEE

WETHERSFIELD

KEWANEE MUNICIPAL AIRPORT

KEWANEE, ILLINOIS 61443

3761 MIDLAND ROAD

COUNTY

TOWNSHIP

ADDRESS

SECTION NO. 17

CITY

THE CONTRACTOR WILL ESTABLISH THE AIRCRAFT OPERATIONAL AREA FOR EACH OF THE AIRPORT RUNWAYS, IN THE PROPOSED WORK AREAS, BY PLACING A ROW OF LATH, 200 FT. FROM EACH OF THE CENTERLINES. NO PERSONNEL OR EQUIPMENT WILL CROSS THE LATH ROW WITHOUT CLOSING THE RESPECTIVE RUNWAY. THE COST OF PLACING THE LATHE WILL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

EXISTING AIRPORT PROPERTY LINE

RUNWAY 9-27 4500'x75

HOLDLINE LOCATION

MIDLAND RÓAD

PROPOSED -

HAUL ROUTE

PROPOSED VAULT LOCATION EMPLOYEE PARKING AND MATERIAL STORAGE

75' X 270'

FOUIPMENT

PARKING

EXISTING


GATE

20' WIDE

	HORIZONTAL AND VERTICAL DATA							
NO.	DESCRIPTION	NORTHING	EASTING	ELEV.				
1	KEWPORT AZ (NGS) MARKER, ALUM. ROD	1,652,491.649	2,349,792.846	850.62				
2	CHISELED "□" ON INSPECTION HOLE	-	-	848.87				
3	KEWPORT (NGS) MARKER, ALUM. ROD	1,652,431.715	2,352,728.103	854.13				
4	CHISELED "□" ON EAST END OF CONC. SIGN BASE	-	-	854.76				
5	CHISELED "□" ON WEST END OF CONC. SIGN BASE	-		851,21				

THE LOCATION, SIZE AND TYPE OF MATERIAL OF EXISTING UNDERGROUND UTILITIES INDICATED ON THE PLANS IS NOT REPRESENTED AS BEING ACCURATE, SUFFICIENT OR COMPLETE. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE ACTUAL LOCATION OF ALL SUCH FACILITIES, INCLUDING SERVICE CONNECTIONS TO UNDERGROUND UTILITIES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL NOTIFY THE UTILITY COMPANIES OF HIS OPERATIONAL PLANS AND SHALL OBTAIN FROM THE RESPECTIVE UTILITY COMPANIES DETAILED INFORMATION AND ASSISTANCE RELATIVE TO THE LOCATION OF THEIR FACILITIES AND THE WORKING SCHEDULE OF THE COMPANIES FOR REMOVAL OR ADJUSTMENT WHERE REQUIRED. IN THE EVENT AN UNEXPECTED UTILITY INTERFERENCE IS ENCOUNTERED DURING CONSTRUCTION, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE LITHLITY COMPANY OF JURISDICTION. THE ENGINEER SHALL

ALSO BE IMMEDIATELY NOTIFIED. MY SUCH MAINS AND SERVICES SHALL BE RESTORED TO SERVICE AT ONCE AND PAID FOR BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE CONTRACT.

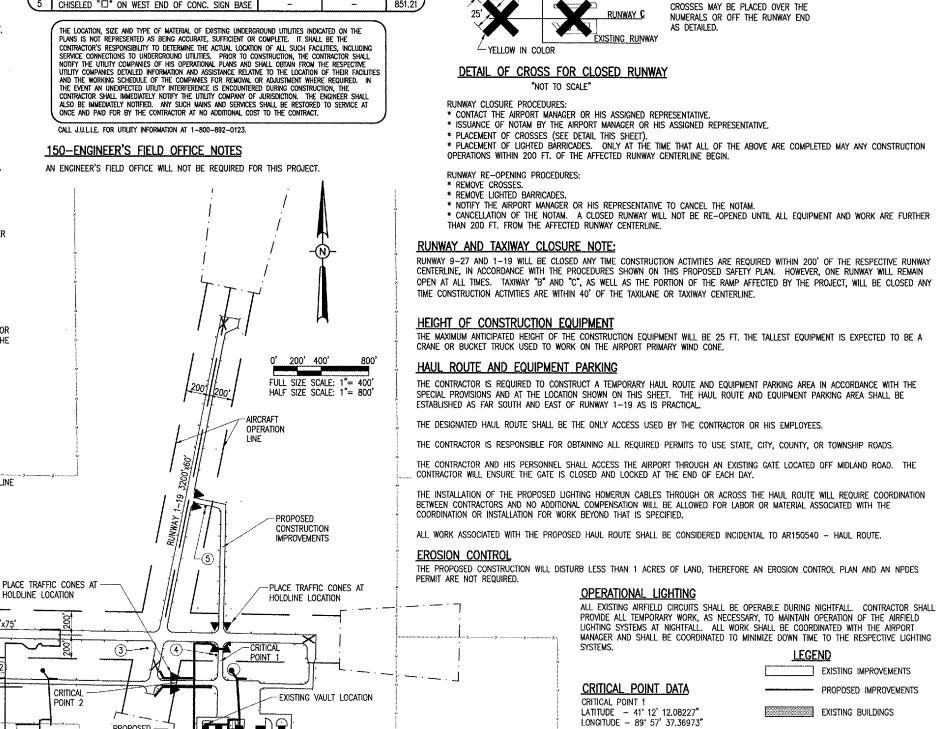

EXISTING AIRPORT PROPERTY LINE

ELEVATION - 854.90

ELEVATION - 855.10

LATITUDE - 41' 12' 10,29760"

LONGITUDE - 89' 57' 42.21939"

CRITICAL POINT 2

TEMPORARY RUNWAY CLOSURE NOTE

COST OF CONSTRUCTING, PLACING, MAINTAINING AND REMOVING CROSSES WILL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED. THE CROSSES WILL BE YELLOW IN COLOR AND SHALL BE MADE OF A SUITABLE MATERIAL AS APPROVED BY THE RESIDENT ENGINEER. THE CROSSES WILL BE PLACED AS SHOWN ON THIS SHEET AND SECURED IN A MANNER APPROVED BY THE RESIDENT ENGINEER. THE PROPOSED CROSSES WILL BE PLACED EACH DAY THE

RUNWAY IS CLOSED AND REMOVED WHEN THE RUNWAY IS RE-OPENED. THE CONTRACTOR WILL BE RESPONSIBILE FOR THE PLACEMENT AND REMOVAL OF THE CROSSES. NO ADDITIONAL COMPENSATION TO THE CONTRACT WILL BE ALLOWED.

**KE008** 

ILLINOIS

COUNTY,

HENRY

KEWANEE I KEWANEE, HE

HANSON

 $\frac{1}{2}$ 

STR

PROPOSED FOLIPMENT/VEHICLE

PARKING AREA & HAUL ROUTE

HORIZONTAL/VERTICAL CONTROL

---- EXISTING AIRPORT PROPERTY LINE

LIGHTED BARRICADES

88

ICIPAL

ELEC	CTRICAL LEGEND — ONE—LINE DIAGRAM
	CABLE TERMINATOR/LUG
***	TRANSFORMER
	DISCONNECT SWITCH
->0-	FUSIBLE DISCONNECT SWITCH
	CIRCUIT BREAKER
-~-	THERMAL MAGNETIC CIRCUIT BREAKER
	FUSE
<b>↓</b> ‡	TRANSIENT VOLTAGE SURGE SUPPRESSOR OR SURGE PROTECTOR DEVICE
#	GROUND — GROUND ROD, GROUNDING ELECTRODE, OR AT EARTH POTENTIAL
¤	Indicating light
W	MOTOR
Ð	ŁOAD, MOTOR, # ≈ HORSEPOWER
0	ELECTRIC UTILITY METER BASE
[°]	JUNCTION BOX WITH SPLICE
xxx	EQUIPMENT, XXX = DEVICE DESCRIPTION
GND	GROUND BUS OR TERMINAL
S/N	NEUTRAL BUS
<b>‡</b>	PANELBOARD WITH MAIN LUGS
<b>1</b>	Panelboard with Main Breaker
<b>₩□≫</b>	fuse panel with main fuse pullout
₽	DUPLEX RECEPTACLE 120V SINGLE PHASE GROUNDING TYPE
	CONTROL STATION
N EM	Transfer swiich
	ENGINE GENERATOR SET

	ELECTRICAL LEGEND - SCHEMATIC
-11-	NORMALLY OPEN (N.O.) CONTACT
-14	NORMALLY CLOSED (N.C.) CONTACT
(9)	STARTER COIL, * = STARTER NUMBER
OL.	OVERLOAD RELAY CONTACT
©R*)	CONTROL RELAY, * ≈ CONTROL RELAY NUMBER
<b>₽</b>	RELAY, * = RELAY NUMBER
000	TOGGLE SWITCH / 2 POSITION SWITCH
OFF AUTO	2—POSITION SELECTOR SWITCH
HAND AUTO  X00  O OOX	3-position selector switch (H-0-a shown)
7	2 POLE DISCONNECT SWITCH
111	3 POLE DISCONNECT SWITCH
<del>-</del>	PHOTOCELI,
-0-	TERMINAL BLOCK, * = TERMINAL NUMBER
	DEVICE TERMINAL, * = DEVICE TERMINAL NUMBER
	INTERNAL PANEL WIRING
	FIELD WIRING
	FUSE
GND	ground bus or terminal
S/N	NEUTRAL BUS
÷	GROUND, GROUND ROD
0 0	INDUSTRIAL CONTROL RELAY OR LIGHTING CONTACTOR
CCR	S1 CUTOUT HANDLE REMOVED
CCR	S1 CUTOUT HANDLE INSERTED
₁ 2/ ₀	N.O. THERMAL, SWITCH
~°	N.C. THERMAL SWITCH

455	ELECTRICAL ABBREVIATIONS  ABOVE FINSHED FLOOR
AF.F.	
A, AMP	AMPERES
ATS	AUTOMATIC TRANSFER SWITCH
AWG	AMERICAN WIRE GAUGE
BKR	BREAKER
- C	CONDUIT
СВ	CIRCUIT BREAKER
СКТ	CIRCUIT
CR	CONTROL RELAY
cu	COPPER
DPDT	DOUBLE POLE DOUBLE THROW
DPST	DOUBLE POLE SINGLE THROW
EM	EMERGENCY
EMT	ELECTRICAL METALLIC TUBING
ENCL	ENCLOSURE
EP	EXPLOSION PROOF
ES	EMERGENCY STOP
ETT.	INTERTEK ELECTRICAL TESTING LABS
ETM	elapse time meter
GFCI	GROUND FAULT CIRCUIT INTERRUPTER
GF1	CROUND FAULT INTERRUPTER
GND	GROUND
GRSC	GALVANIZED RIGID STEEL CONDUIT
HID	HIGH INTENSITY DISCHARGE
HOA	HAND OFF AUTOMATIC
HP	HORSEPOWER
HPS	HIGH PRESSURE SODIUM
į,	JUNCTION BOX
KVA	KILOVOLT AMPERE(S)
KW	KILOWATTS
LC	LIGHTING CONTACTOR
LTFMC	LIQUID TIGHT FLEXIBLE METAL CONDUIT (UL LISTED)
LTG	LIGHTING
LP	LIGHTING PANEL
MAX	MAXIMUM
мсв	MAIN CIRCUIT BREAKER
MCM	THOUSAND CIRCLUAR MIL.
MDP	MAIN DISTRIBUTION PANEL
MFR	MANUFACTURER
MH	METAL HALIDE
MIN	MINIMUM
NLO	MAIN LUGS ONLY
NEC	NATIONAL ELECTRICAL CODE (NFPA 70)
NC NC	NORMALLY CLOSED
	NORMALLY OPEN
NO NTC	
NTS	NOT TO SCALE
OHE.	OVERHEAD ELECTRIC
OL	OVERLOAD

ELECTRICAL ABBREVIATIONS (CONTINUED)						
P8	PULL 80X					
PC	PHOTO CELL					
PDB	POWER DISTRIBUTION BLOCK					
PNL	PANEL.					
RCPT	RECEPTACLE					
R	RELAY					
\$	STARTER					
SPD	SURGE PROTECTION DEVICE					
SPST	SINGLE POLE SINGLE THROW					
TVSS	TRANSIENT VOLTAGE SURGE SUPPRESSOR					
TYP	TYPICAL					
UĢ	UNDERGROUND					
UGE	Underground Electric					
UL	UNDERWRITER'S LABORATORIES					
٧	VOLTS					
₩/	WITH					
W/0	WITHOUT					
WP	WEATHER PROOF					
XFER	TRANSFER					
XFMR	TRANSFORMER					

AIRPORT EQUIPMENT ABBREVIATIONS						
CCR	CONSTANT CURRENT REGULATOR					
MIRL	MEDIUM INTENSITY RUNWAY LIGHT					
MITL	MEDIUM INTENSITY TAXIMAY LIGHT					
NDB	NONDIRECTIONAL BEACON					
PAPI	PRECISION APPROACH PATH INDICATOR					
LASI	PULSE LIGHT APPROACH SLOPE INDICATOR					
REIL	RUNWAY END IDENTIFIER LIGHT					
VADI	VISUAL APPROACH DESCENT INDICATOR					
VASI	VISUAL APPROACH SLOPE INDICATOR					
WC	WIND CONE					

	ELECTRICAL LEGEND — PLANS
	CONDUIT (EXPOSED)
	CONDUIT OR UNIT DUCT (CONCEALED OR BURIED)
	DUCT
E	BURIED/UNDERGROUND ELECTRIC
UGE	UNDERGROUND ELECTRIC
ОНЕ	OVERHEAD ELECTRIC
•–¤	POLE MOUNTED HID FIXTURE
<b>e</b> =	DUPLEX CONVENIENCE RECEPTACLE, 120V, SINGLE PHASE, GROUNDING TYPE, 48" A.F.F. EXCEPT AS NOTED
ю٥٠	WALL OR CEILING MT'D. JUNCTION BOX, CONFIGURATION VARIES WITH USE
40	SINGLE THROW DISCONNECT SWITCH
421	SINGLE THROW, FUSIBLE DISCONNECT SWITCH
400	ENCLOSED CIRCUIT BREAKER
C213	CONTROL PANEL
9	MOTOR, ESTIMATED H.P. AS INDICATED.
•	MOTOR
T	TRANSFORMER
	ELECTRIC UTILITY METER
	ENCLOSURE
	CIRCUIT BREAKER PANEL—SEE SCHEDULES
0	GROUND ROD
	long slashes indicate neutral. Short slashes indicate hot or switched leg. G = separate ground wire.
PNL A	HOMERUN TO PANEL PNL A INDICATES PANEL 1,3,5 INDICATES CIRCUIT NUMBERS
\$	SINGLE POLE SWITCH
\$ OR \$1	Fractional HP Starter
©	CONTACTOR
œ	SURFACE MOUNTED OR CHAIN HUNG FLUORESCENT FIXTURE
юо	WALL OR CEILING MT'D. INCANDESCENT OR HID FIXTURE.

**KE008** 

# NOTES:


- 1. ALL ELECTRICAL EQUIPMENT SHALL BE INSTALLED IN CONFORMANCE WITH NFPA 70 (MOST CURRENT ISSUE IN FORCE), THE RESPECTIVE EQUIPMENT MANUFACTURER'S DIRECTIONS AND ALL OTHER APPLICABLE LOCAL CODES, LAWS, ORDINANCES, AND REQUIREMENTS IN FORCE. ANY INSTALLATIONS WHICH VOID THE U.L. LISTING, ETL LISTING (OR OTHER THIRD PARTY LISTING) AND/OR THE MANUFACTURER'S WARRANTY OF A DEVICE SHALL NOT BE PERMITTED.
- CONTRACTOR SHALL COORDINATE WORK AND ANY POWER OUTAGES WITH THE RESPECTIVE FACILITY OWNER PERSONNEL AND THE AIRPORT MANAGER.
- 3. COLOR CODE PHASE AND NEUTRAL CONDUCTOR INSULATION FOR NO. 6 AWG OR SMALLER. PROVIDE COLORED INSULATION OR COLORED MARKING TAPE FOR PHASE AND NEUTRAL CONDUCTORS FOR NO. 4 AWG AND LARGER. INSULATED GROUND CONDUCTORS SHALL HAVE GREEN COLORED INSULATION FOR ALL CONDUCTOR AWG AND/OR KCMIL. STANDARD COLORS FOR POWER WIRING AND BRANCH CIRCUITS SHALL BE AS FOLLOWS:


120/240 VAC.	1 PHASE, 3	WIR
PHASE A	BLACK	
PHASE B	RED	
NEUTRAL	WHITE	
GROUND	GREEN	

1	
1	
1	S
ı	
ł	Z
ı	
l	•
ı	
ı	
I	
ŧ	
ı	
1	Maria .
1	
i	\ <u>^</u>
ı	~ /
I	\ /
1	v
1	•
ı	•

CONSTRUCT VAULT
ELECTRICAL LEGEND
AND ABBREVIATIONS

**4**4 of 27 sheets

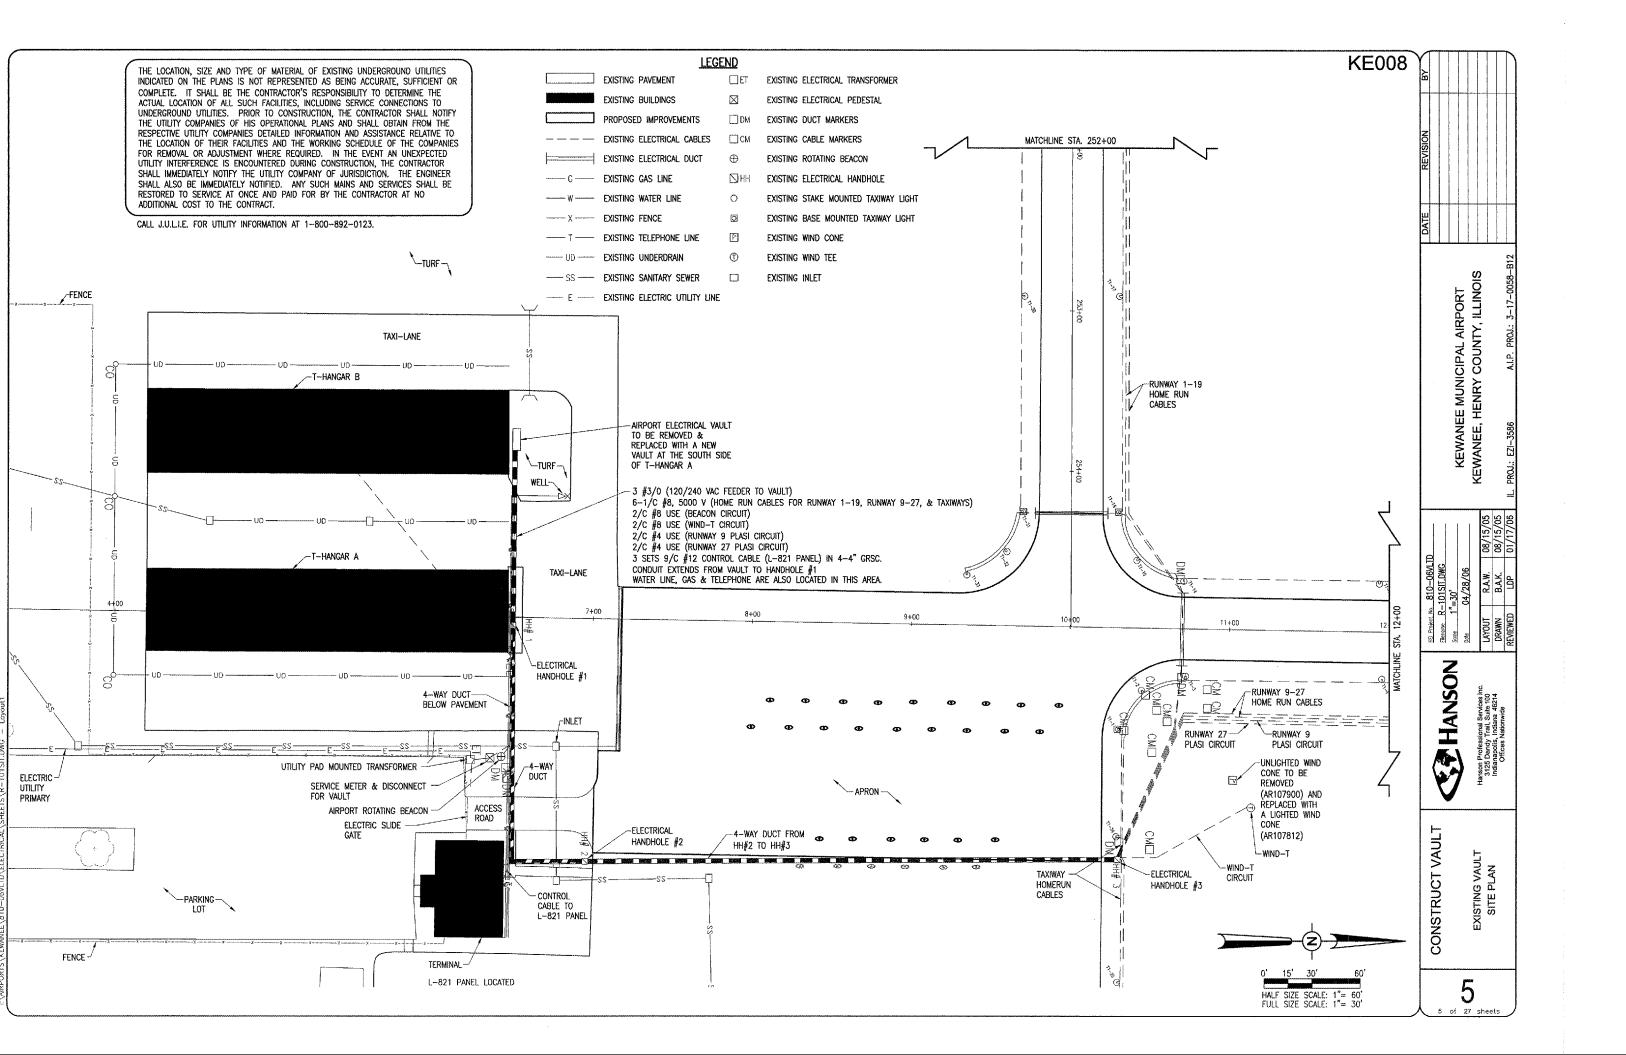

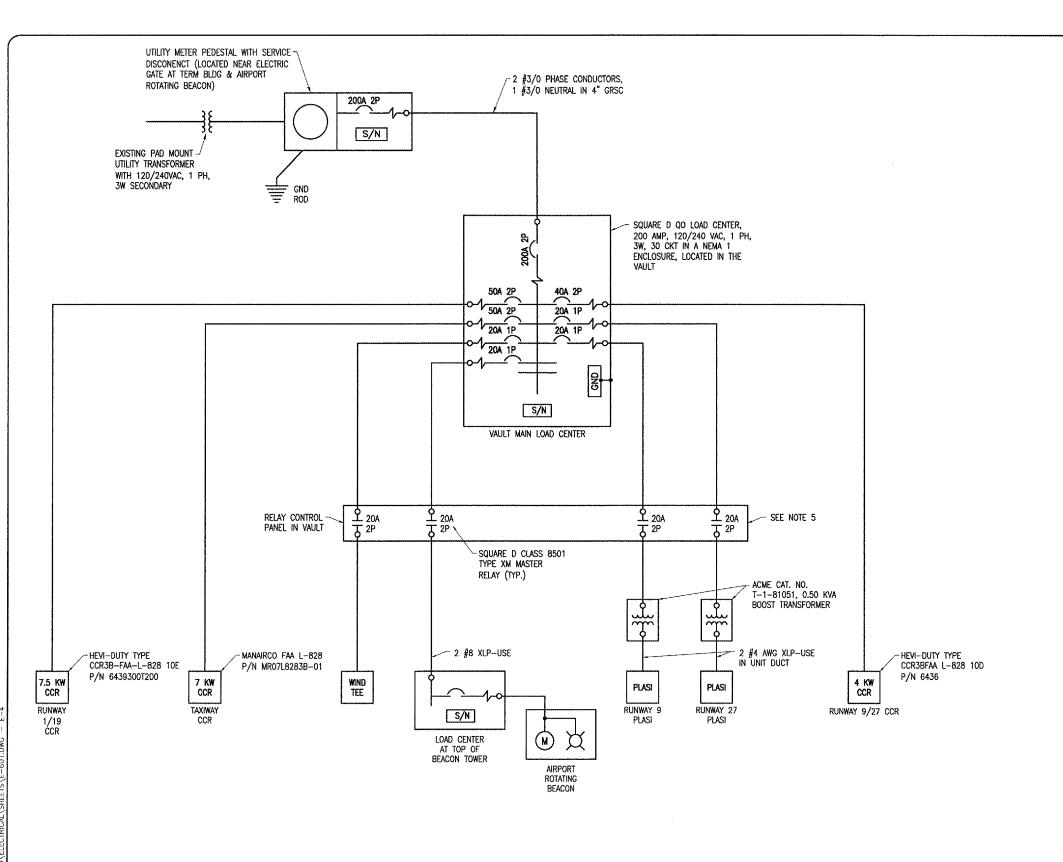

NOTES

- ALL VAULT WORK AND/OR POWER OUTAGES SHALL BE COORDINATED WITH THE AIRPORT MANAGER.
- CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS TO CONFIRM POWER & CONTROL CIRCUITS.
- 3. EXISTING AIRFIELD CIRCUITS SHALL BE LOCATED, IDENTIFIED, DISCONNECTED, REROUTED & RECONNECTED TO THE NEW VAULT AS DETAILED HEREIN. ALL EXISTING AIRFIELD LIGHTING SYSTEMS SHALL BE OPERABLE DURING NIGHTFALL, CONTRACTOR SHALL PROVIDE ALL TEMPORARY WORK AS NECESSARY TO MAINTAIN OPERATION OF THE AIRFIELD LIGHTING SYSTEMS AT NIGHTFALL. CONTRACTOR SHALL COORDINATE TRANSFER OF EXISTING AIRFIELD CIRCUITS TO MINIMIZE DOWN TIME.
- 4. CCR DENOTES CONSTANT CURRENT REGULATOR.
- 5. PLASI'S ARE WIRED FOR CONTINUOUS OPERATION 24 HOURS A DAY. RELAY CONTACTS MIGHT BE BYPASSED. FIELD VERIFY AS NECESSARY.

KE008	BY					
NATED WITH THE  NFIRM POWER &  SCONNECTED, HEREIN. ALL RING NIGHTFALL,	REVISION					
SARY TO MAINTAIN CONTRACTOR TO MINIMIZE DOWN	DATE					

KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS


HE Project No. 810–06W,TD
Februare E=601.DWG
Scale NO. SCALE
tole 04/28/06

Hanson Professional Services Inc. 3126 Dandy Tall, Suite 100 Indianopolis, Indian 48214 Office Inviscoular, Office

CONSTRUCT VAULT
EXSITING VAULT
ELECTRICAL ONE-LINE
DIAGRAM

6 of 27 sheets

EXISTING VAULT ELECTRICAL ONE-LINE DIAGRAM

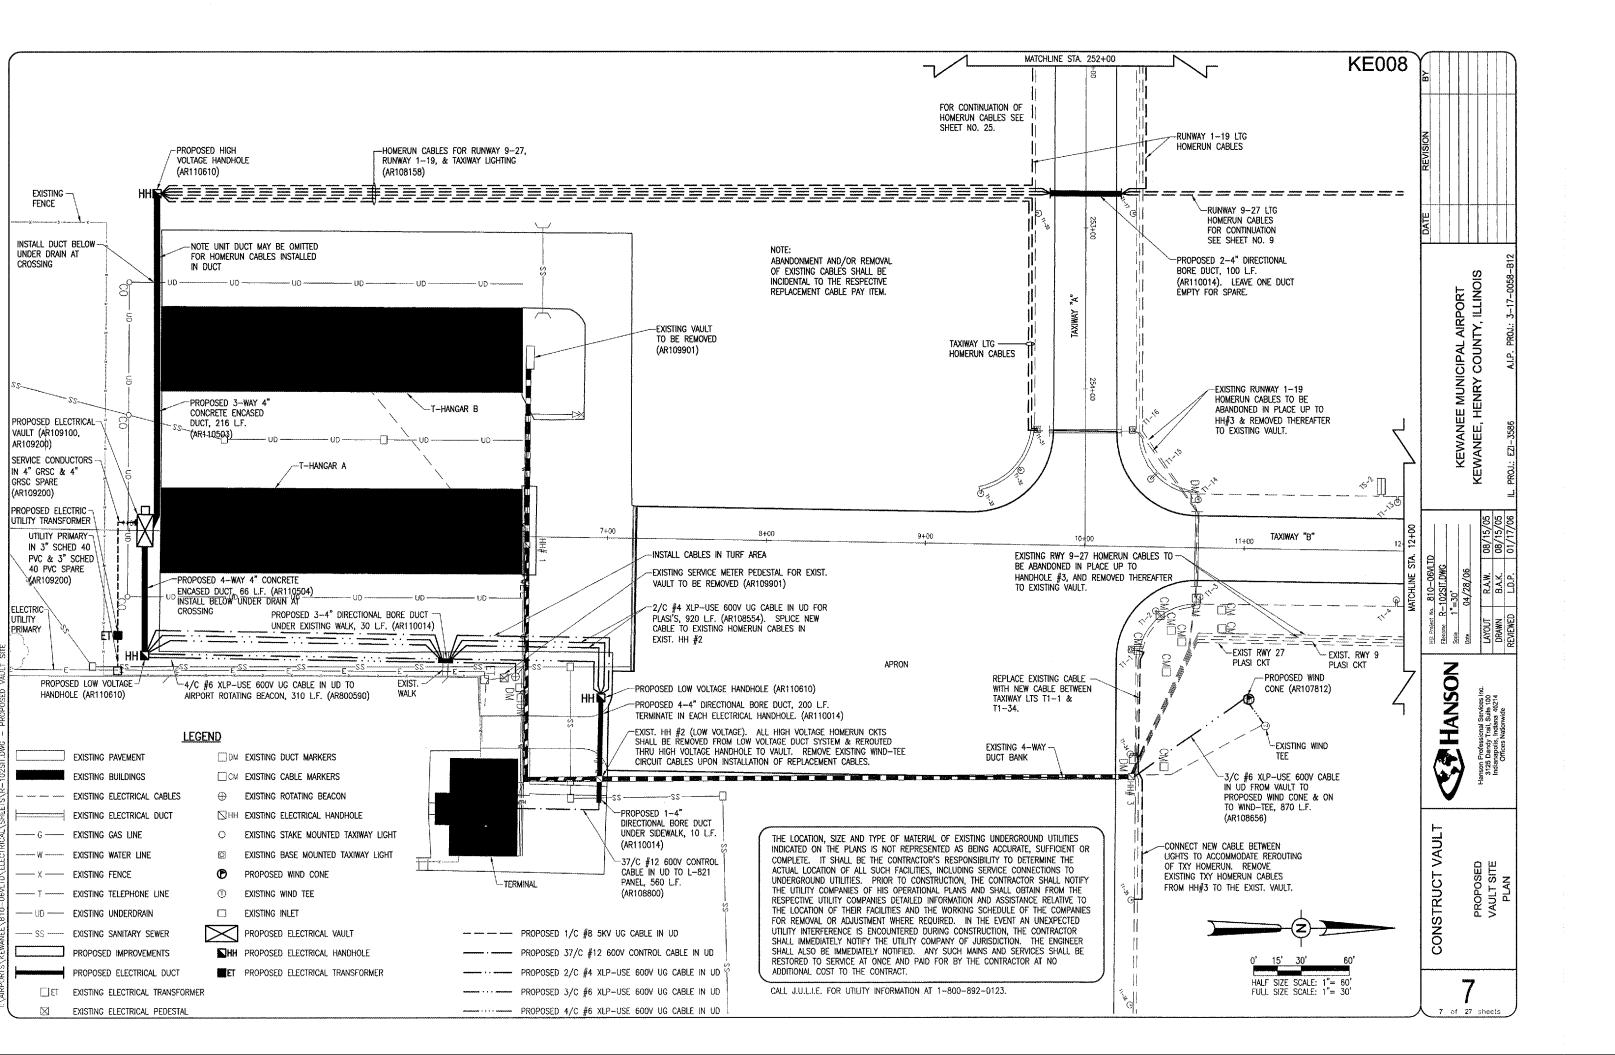



THE LOCATION, SIZE AND TYPE OF MATERIAL OF EXISTING UNDERGROUND UTILITIES INDICATED ON THE PLANS IS NOT REPRESENTED AS BEING ACCURATE, SUFFICIENT OR COMPLETE. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE ACTUAL LOCATION OF ALL SUCH FACILITIES, INCLUDING SERVICE CONNECTIONS TO UNDERGROUND UTILITIES. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL NOTIFY THE UTILITY COMPANIES OF HIS OPERATIONAL PLANS AND SHALL OBTAIN FROM THE RESPECTIVE UTILITY COMPANIES DETAILED INFORMATION AND ASSISTANCE RELATIVE TO THE LOCATION OF THEIR FACILITIES AND THE WORKING SCHEDULE OF THE COMPANIES FOR REMOVAL OR ADJUSTMENT WHERE REQUIRED. IN THE EVENT AN UNEXPECTED UTILITY INTERFERENCE IS ENCOUNTERED DURING CONSTRUCTION, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE UTILITY COMPANY OF JURISDICTION. THE ENGINEER SHALL ALSO BE IMMEDIATELY NOTIFIED. ANY SUCH MAINS AND SERVICES SHALL BE RESTORED TO SERVICE AT ONCE AND PAID FOR BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE CONTRACT.


CALL J.U.L.I.E. FOR UTILITY INFORMATION AT 1-800-892-0123.

## NOTE

ABANDONMENT AND/OR REMOVAL OF EXISTING RUNWAY OR TAXIWAY LIGHTING CABLES SHALL BE INCIDENTAL TO ITEM AR108158 1/C NO. 8, 5KV, U.G. CABLE IN U.D.

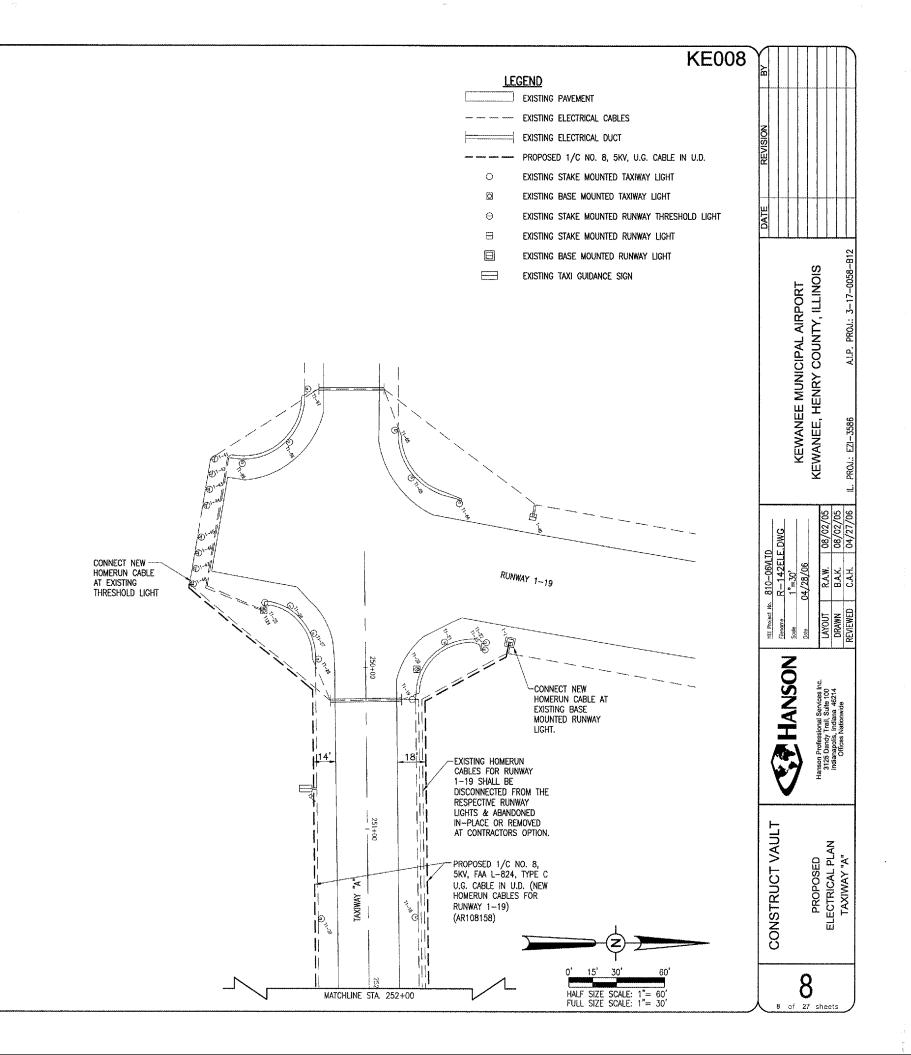

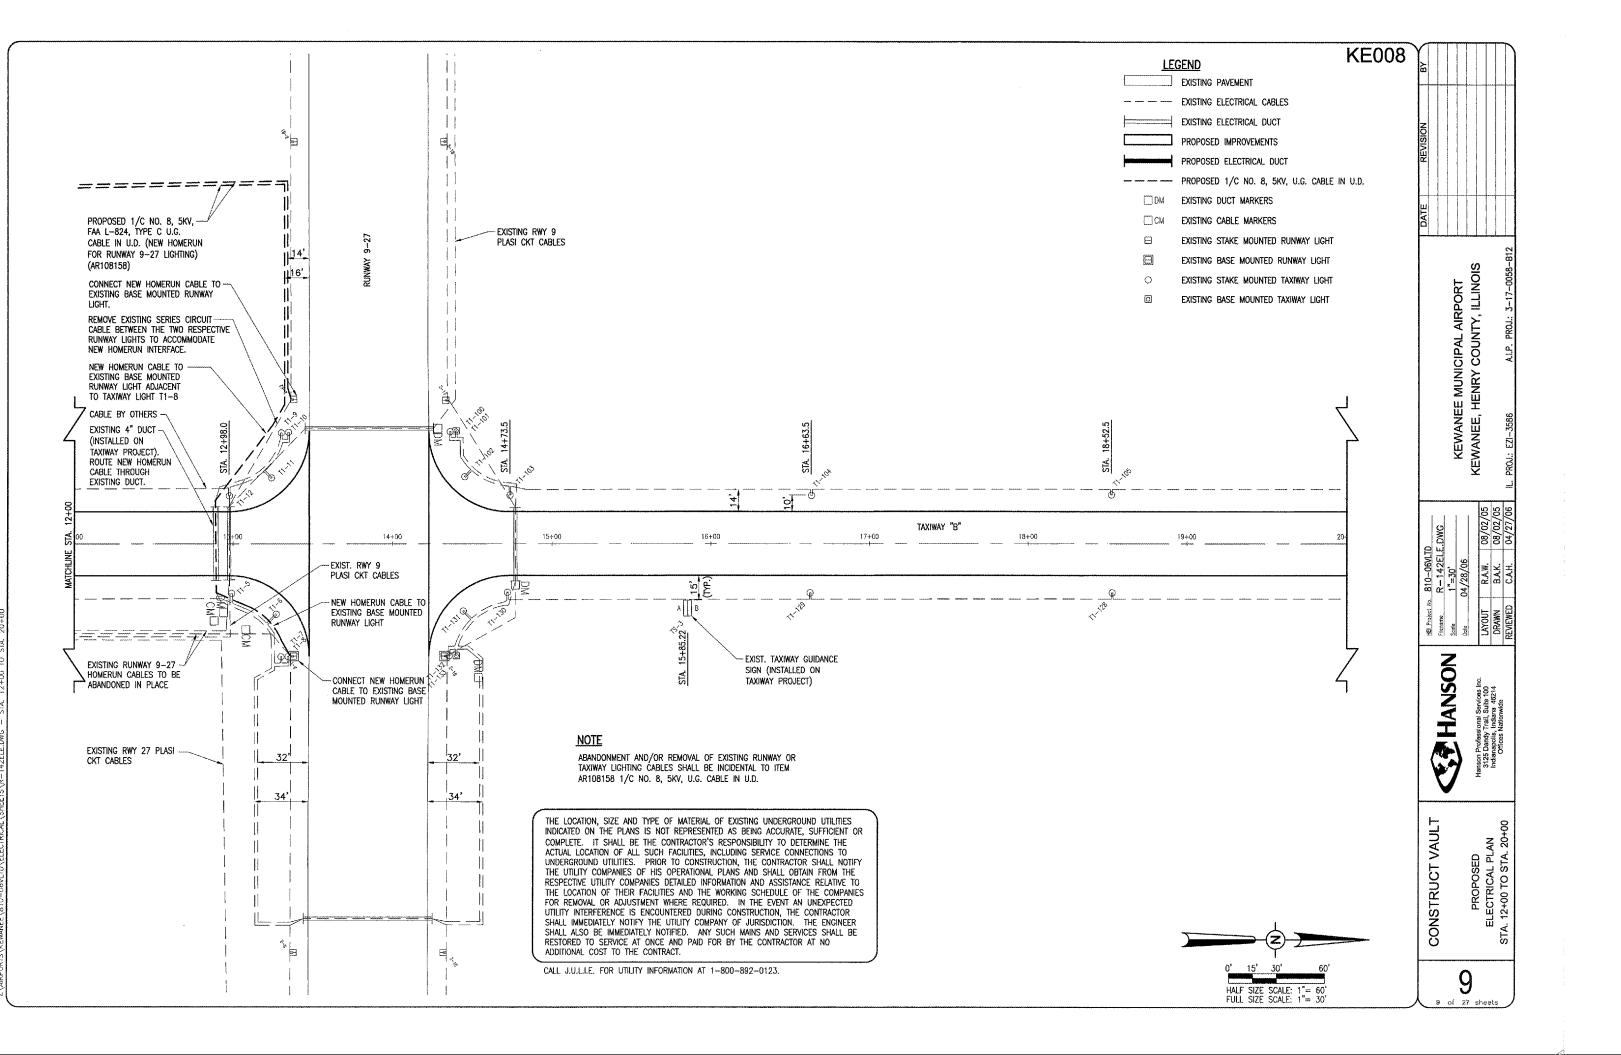

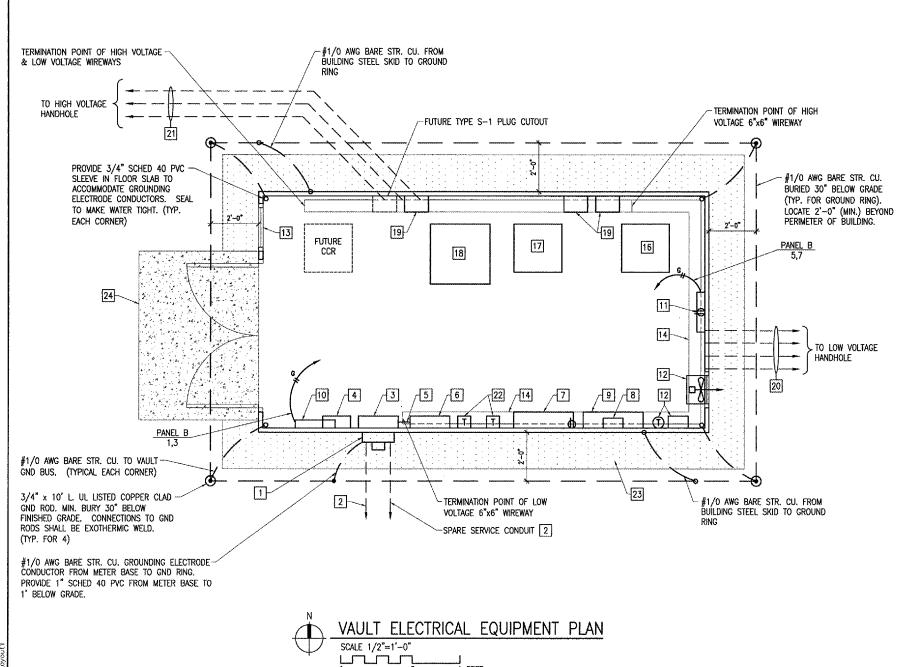

KEYED NOTES

- 1 ELECTRIC UTILITY METER WITH SUPPORT HARDWARE PER SERVING ELECTRIC UTILITY COMPANY REQUIREMENTS.
- UTILITY SERVICE CONDUCTORS (BY UTILITY) IN 4" GRSC (BY CONTRACTOR) FROM UTILITY TRANSFORMER TO METER BASE. INCLUDE SPARE 4" GRSC PER UTILITY CO. REQUIREMENTS. CONTRACTOR SHALL FURNISH & INSTALL SERVICE. CONDUCTORS & CONDUIT FROM METER BASE TO SERVICE PANEL. SEE "NEW VAULT ELECTRICAL ONE LINE DIAGRAM".
- 3 SERVICE PANEL A, SEE PANEL A SCHEDULE.
- [4] AC SURGE PROTECTOR/TVSS, SEE "NEW VAULT ELECTRICAL ONE LINE DIAGRAM."
- [5] 2 #1/0 THWN, 1 #1/0 THWN NEUTRAL, 1 #4 GND IN 2" GRSC FROM SERVICE PANEL A TO PANEL B.
- 6 PANEL B, SEE PANEL B SCHEDULE.
- [7] LIGHTING CONTACTOR PANEL. SEE AIRFIELD LIGHTING WIRING SCHEMATIC AND LIGHTING CONTACTOR PANEL DETAIL.
- L-854 RADIO CONTROL UNIT. EXTEND RADIO ANTENNA CABLE AND MOUNT ANTENNA ON THE ROOF FOR PROPER
- RADIO RELAY INTERFACE PANEL WITH PHOTOCELL BYPASS SWITCH FOR RUNWAY 1-19 CCR, TAXIWAY CCR, AND RUNWAY 18-36 CCR. SEE AIRFIELD LIGHTING WIRING SCHEMATIC FOR WIRING REQUIREMENTS. MOUNT PHOTOCELL ON ROOF. FIELD VERIFY LOCATION FOR PROPER CONTROL AND OPERATION.
- ELECTRIC WALL HEATER EH-1, 3000 WATT, 240 VAC, 1 PHASE, SUITABLE FOR SURFACE MOUNTING WITH INTEGRAL THERMOSTAT, Q-MARK MODEL CWH3407, OR APPROVED EQUAL. BOTTOM OF HEATER SHALL BE 3" ABOVE THE UPPER
- ELECTRIC WALL HEATER EH-2, 2000 WATT, 240 VAC, 1 PHASE, SUITABLE FOR SURFACE MOUNTING WITH INTEGRAL THERMOSTAT, Q-MARK MODEL CWH3404, OR APPROVED EQUAL. BOTTOM OF HEATER SHALL BE 3" ABOVE THE UPPER
- EXHAUST FAN EF-1, 2000 CFM AT .25" STATIC PRESSURE WITH ½ HP, 120 VAC MOTOR, COOK MODEL 20S10D, OR APPROVED EQUAL. INCLUDE WALL HOUSING WITH GUARD, GRAVITY BACK DRAFT DAMPER, ALUMINUM WEATHER-HOOD PAINTED TO MATCH BUILDING EXTERIOR, STAINLESS STEEL INSECT SCREEN, AND FRACTIONAL HP ELECTRICAL DISCONNECT. INSTALL FAN AS HIGH AS POSSIBLE. PROVIDE 120 VAC THERMOSTAT WITH CONTACTOR AND AUTO-OFF-MANUAL CONTROL SWITCH AT 48" AFF. MOUNT THERMOSTAT ON 2" THICK INSULATED BASE, SEE EXHAUST FAN CONTROL SCHEMATIC FOR WIRING REQUIREMENTS.
- INTAKE LOUVER L-1, 24" WIDE BY 48" HIGH INTAKE LOUVER WITH STAINLESS STEEL INSECT SCREEN, 120 VAC MOTORIZED DAMPER WITH LIMIT SWITCH, KYNAR FINISH MATCHING BUILDING EXTERIOR, RUSKIN MODEL ELF375DX, OR APPROVED EQUAL. SEE EXHAUST FAN CONTROL SCHEMATIC FOR WIRING REQUIREMENTS.
- 6" BY 6" LOW VOLTAGE WIREWAY. LABEL "LOW VOLTAGE" EVERY 4 FEET. INSTALL ABOVE HIGH VOLTAGE WIREWAY.
- [15] 6" BY 6" HIGH VOLTAGE WIREWAY. LABEL "HIGH VOLTAGE" EVERY 4 FEET. INSTALL BELOW LOW VOLTAGE WIREWAY.
- RUNWAY 1-19 CONSTANT CURRENT REGULATOR, SEE GENERAL NOTE 1.
- 17 RUNWAY 9-27 CONSTANT CURRENT REGULATOR. SEE GENERAL NOTE 1.
- TAXIWAY CONSTANT CURRENT REGULATOR. SEE GENERAL NOTE 1.
- SERIES PLUG CUTOUT TYPE S-1 WITH ENCLOSURE, SEE GENERAL NOTES 1 AND 2.
- 20 4-4" GRSC FROM LOW VOLTAGE WIREWAY TO LOW VOLTAGE HANDHOLE.
- [21] 3-4" GRSC FROM HIGH VOLTAGE WIREWAY TO HIGH VOLTAGE HANDHOLE.
- 22 BOOST TRANSFORMERS. SEE ELEVATION VIEW.
- VEGETATION BARRIER CONSISTING OF A MIN. 3" PEA GRAVEL SURFACE OVER FILTER OR LANDSCAPING FABRIC. PROPOSED SURFACE TREATMENT WILL COVER ENTIRE AREA BENEATH VAULT STRUCTURE AS WELL AS 18" AROUND THE PERIMETER OF THE BUILDING EDGE. THE STONE AND FABRIC AS WELL AS ANY EQUIPMENT AND LABOR REQUIRED TO COMPLETE THIS TASK WILL BE CONSIDERED INCIDENTAL TO THE INSTALLATION OF THE PROPOSED ELECTRICAL VAULT AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.
- ENTRANCE PAD CONSTRUCTED OF 6" CONCRETE SLAB W/6X6-W5XW5 WELDED WIRE FABRIC ON A COMPACTED SUBGRADE. MINIMUM DIMENSIONS OF PAD WILL BE 7"Wx5"Dx6"H, SLOPED AT A MIN. OF 0.5"/FT AWAY FROM THE VAULT ENTRANCE. PCC USED TO CONSTRUCT THE PAD WILL CONFORM TO ITEM 610. ALL MATERIALS, LABOR AND EQUIPMENT USED TO CONSTRUCT THE PAD INCLUDING ANY GRADING REQUIRED WILL BE CONSIDERED INCIDENTAL TO THE CONSTRUCTION OF THE PROPOSED ELECTRICAL VAULT AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

#### GENERAL NOTES

- SEE "NEW VAULT ELECTRICAL ONE LINE DIAGRAM" FOR LOW VOLTAGE INPUT POWER WIRING REQUIREMENTS TO CCR'S (CONSTANT CURRENT REGULATORS). SEE "HIGH VOLTAGE WIRING SCHEMATIC" FOR CCR OUTPUT WIRING REQUIREMENTS. SEE "AIRFIELD LIGHTING WIRING SCHEMATIC" FOR CCR CONTROL WIRING REQUIREMENTS. PROVIDE 5 FEET MINIMUM CLEAR WORKING SPACE IN FRONT OF EACH CCR AND EACH SERIES PLUG CUTOUT.
- CONSTANT CURRENT REGULATORS AND THEIR RESPECTIVE SERIES PLUG CUTOUTS SHALL BE CLEARLY LABELED TO IDENTIFY THE RESPECTIVE REGULATOR DESIGNATION, RUNWAY OR TAXIWAY SERVED, POWER SOURCE OR CIRCUIT, AND
- 3. SEE ELEVATION VIEWS FOR ADDITIONAL INFORMATION ON PROPOSED EQUIPMENT LAYOUTS.
- 4. COORDINATE CONDUIT & SLEEVE ENTRANCES THROUGH FLOOR SLAB AND WALLS.

KE008	A BA	
S.  METER  LL SERVICE  DIAGRAM".	REVISION	
	DATE	

ILLINOIS COUNTY,  $\overline{\overline{c}}$ HENRY KEWANEE I KEWANEE, HE


HANSON

VAULT PROPOSED T ELECTRICAL VA NIPMENT PLAN ONSTRUCT

E

10 of 27 sheet

ional Trail, ! Indian 

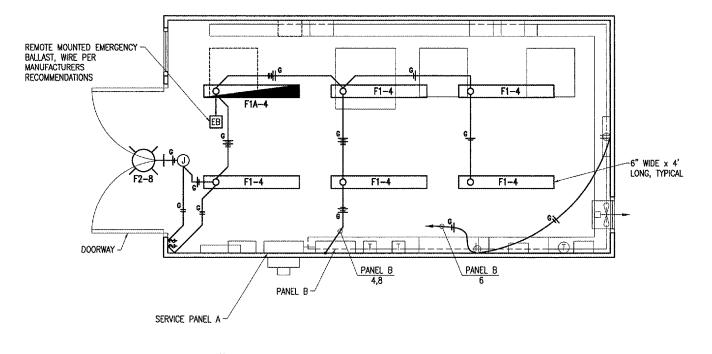

VAULT LIGHTING & RECEPTACLE PLAN

SCALE 1/2"=1'-0"

		LIGHTING FIXTURE SO	HEDULE			
FIXT. TYPE	DESCRIPTION	MANUFACTURER & CATALOG NO.	LAMPS/ WATTS		MOUNTING	REMARKS
F1	4 FT. WET LOCATION LISTED ENCLOSED AND GASKETED INDUSTRIAL FLUORESCENT LIGHT FIXTURE, IMPACT RESISTANT, UV RESISTANT REINFORCED POLYESTER FIBERCIASS HOUSING, HIGH IMPACT ACRYLIC DIFFUSER, RAPID START COLD WEATHER O DEG. F. ELECTRONIC BALLAST WITH LESS THAN OR EQUAL TO 10% THD.	UTHONIA: DMW-2-32-AR-120- CW-GEB10RS-WLF	2-32W T8 4100K 59 TOTAL INPUT WATTS	120	SURFACE TO HARD CEILING	PROVIDE WET LOCATION FITTINGS INSTALLED IN TOP OF FIXTURE.
F1A	SAME AS F1 EXCEPT PROVIDE AN EMERGENCY BALLAST CAPABLE OF OPERATING 2 LAMPS FOR 90 MINUTES AT 1100-1400 TOTAL LUMENS, BODINE #B50ST. NOTE BALLAST WILL HAVE TO BE REMOTE MOUNTED NEAR FIXTURE AS INDICATED ON THE PLANS.	CW-GEB10RS-WLF	2-32W TB 4100K 59 TOTAL INPUT WATTS	120	SURFACE TO HARD CEILING	PROVIDE WET LOCATION FITTINGS INSTALLED IN TOP OF FIXTURE.
F2		TWA-42TRT-120-SF-	1-42W TRT 4100K 47 TOTAL INPUT WATTS	120		CONNECT TO WALL SWITCH LOCATED ON THE INSIDE OF THE BUILDING.

 $\frac{\text{NOTE}}{\text{15 AMP}}$  & 20 AMP BRANCH CIRCUITS FOR LIGHTING & RECEPTACLES SHALL USE #12 AWG THWN (MIN.).


KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS


HANSON


VAULT LIGHTING AND RECEPTACLE PLAN

CONSTRUCT VAULT

11 of 27 she

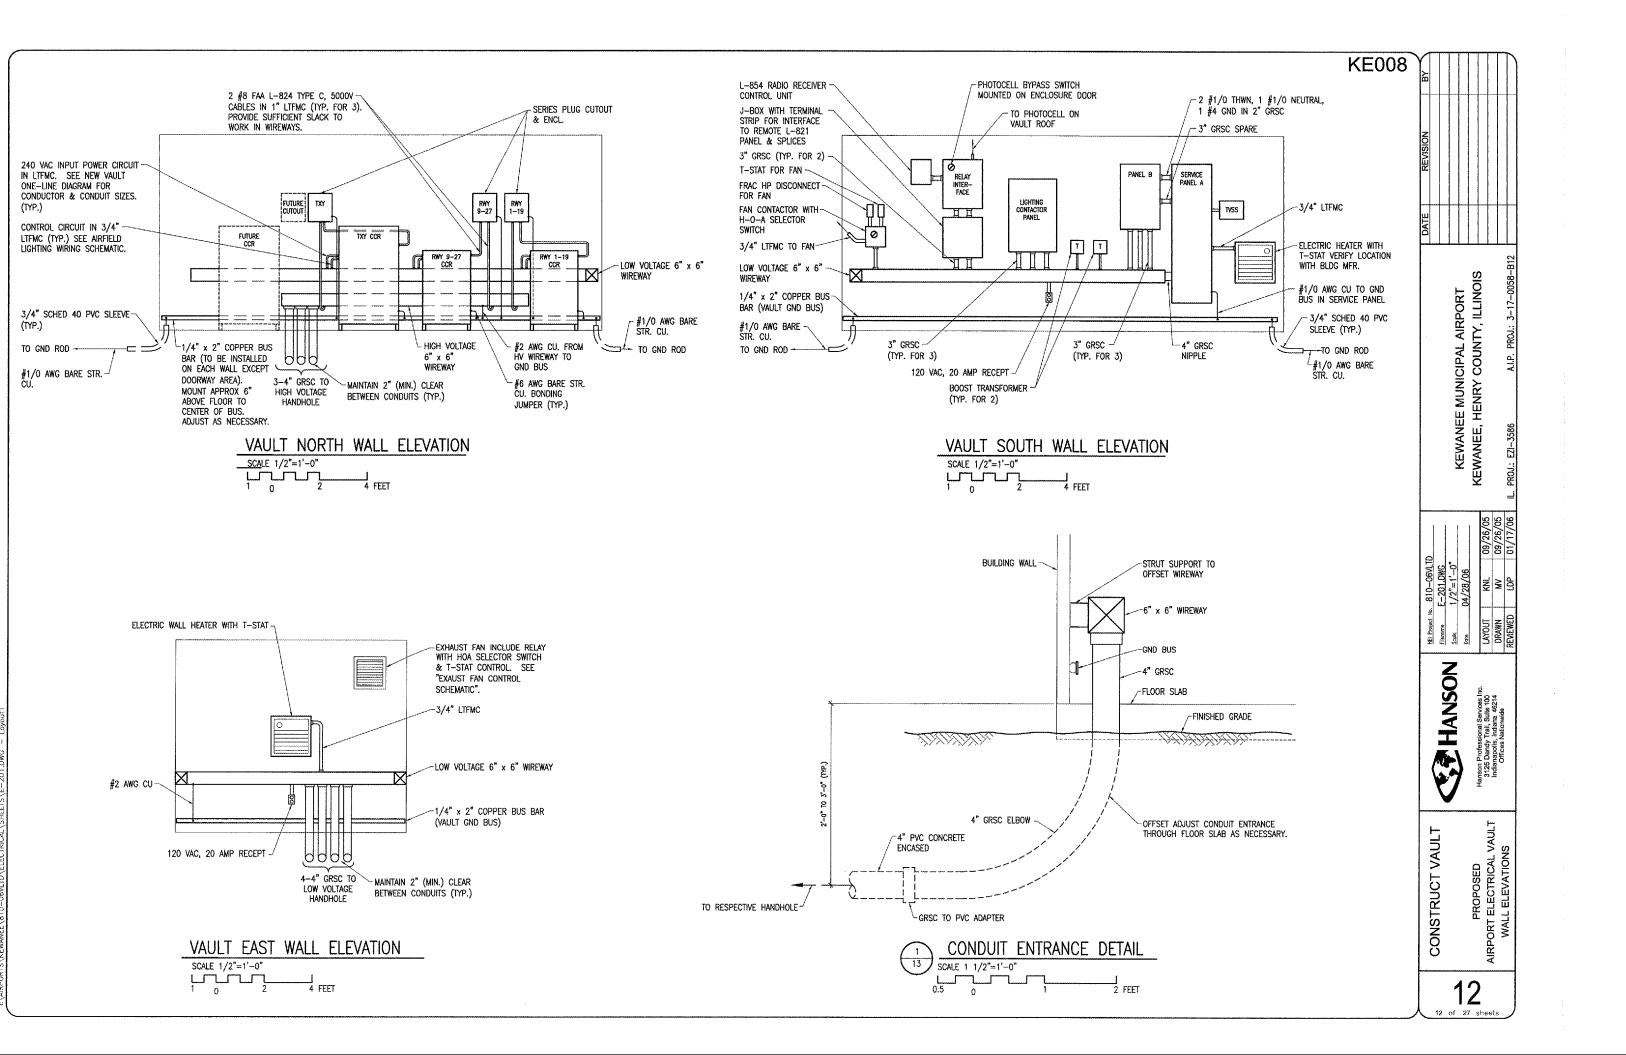


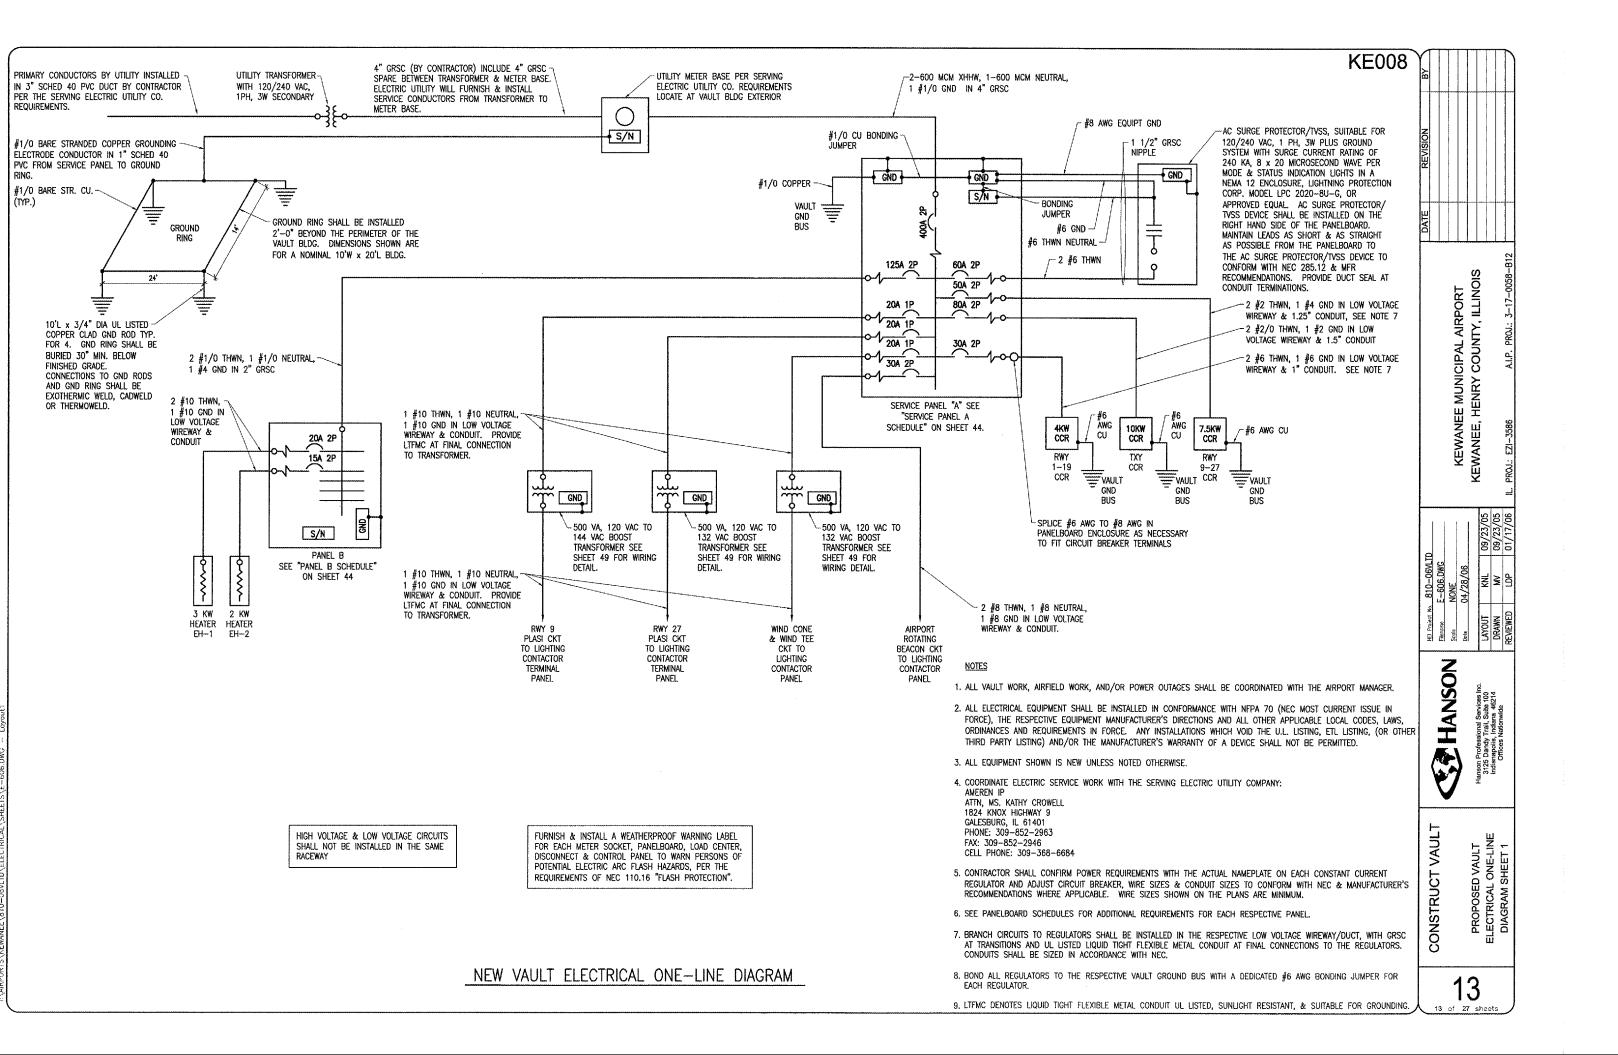

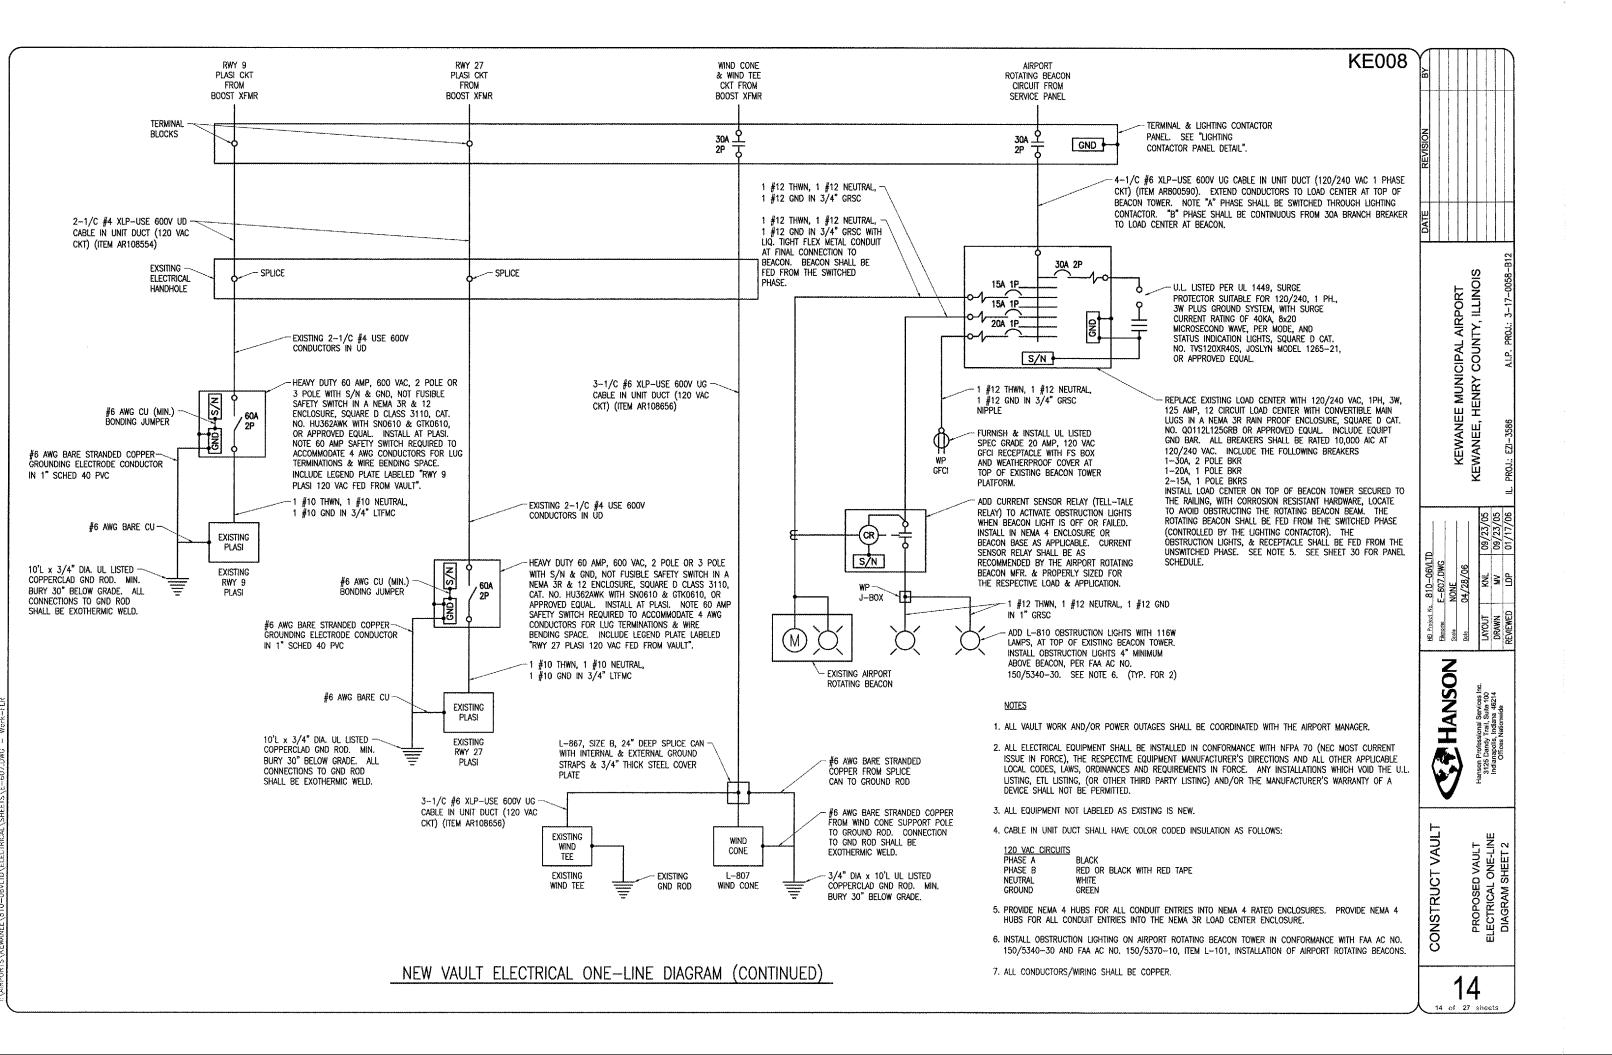

400 AMP, 120/240 VAC, 1 PHASE, 3 WIRE, 42 CIRCUIT PANELBOARD WITH 400 AMP, 2 POLE MAIN BREAKER WITH 22,000 AIC AT 240 VAC IN A NEMA 1 ENCLOSURE. INCLUDE SEPARATE GROUND BAR KITS. ALL BRANCH BREAKERS SHALL BE BOLT-ON TYPE WITH 22,000 AIC AT 120/240 VAC. PANELBOARD SHALL BE SQUARE D CAT. NO. NQOD42L400CU WITH NQOD4 MAIN BREAKER KIT AND Q4L2400 MAIN BREAKER IN A NEMA 1 ENCLOSURE, OR APPROVED EQUAL.

- . PANELBOARD BUS SHALL BE COPPER. NEUTRAL BUS SHALL BE COPPER. EQUIPMENT GROUND BARS SHALL BE COPPER. NOTE ONE OF THE EQUIPMENT GROUND BARS SHALL ACCOMMODATE LINE & TAP GROUND WIRES UP TO #1/0 AWG. THE OTHER GROUND BAR SHALL ACCOMMODATE A #1/0 AWG LINE/BONDING JUMPER & TAP GROUND CONDUCTORS FROM #14 AWG TO #6 AWG.
- 2. INCLUDE ENGRAVED PHENOLIC LEGEND PLATE LABELED "SERVICE PANEL A, 120/240 VAC, 1 PHASE, 3 WIRE". INCLUDE ADDITIONAL LEGEND PLATE FOR THE MAIN BREAKER LABELED "SERVICE BREAKER".

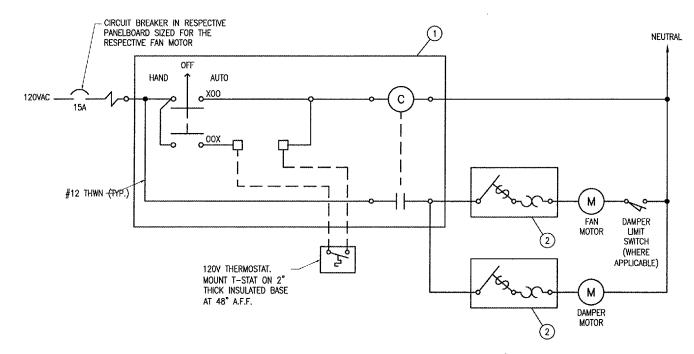

EXHAUST FAN CONTROL SCHEMATIC

T #	DUTY	SIZE	l			SIZE DUTY	CKT #
1	VAULT HEATER EH-1	20A 2P	l 工—	1	$\sim$	15A 1P VAULT FAN	2
3		****	<b>│</b>		$\sim$	15A 1P VAULT INTERIOR LIGHTING	4
5	VAULT HEATER EH-2	15A 2P	1 工		$\sim$	20A 1P VAULT RECEPTACLES	6
7			l ^_		$\sim$	15A 1P VAULT EXTERIOR LIGHTING	8
	SPARE	15A 1P	l ^_			BLANK	10
	SPARE	15A 1P				BLANK	12
	SPARE	20A 1P		<u> </u>		BLANK	14
	SPARE	20A 1P	] <u> </u>			BLANK	16
	BLANK		l	1		BLANK	18
	BLANK					BLANK	20
1	BLANK					BLANK	22
3	BLANK					BLANK	24
5	BLANK		l _			BLANK	26
	BLANK		l			BLANK	28
9	BLANK		l _			BLANK	30
		GND		S/N		GND	

225 AMP, 120/240 VAC, 1 PHASE, 3 WIRE, 30 CIRCUIT PANELBOARD WITH MAIN LUGS IN A NEMA 1 ENCLOSURE. INCLUDE SEPARATE GROUND BAR KITS. ALL BRANCH BREAKERS SHALL BE BOLT-ON TYPE WITH 22,000 AIC AT 120/240 VAC. PANELBOARD SHALL BE SQUARE D CAT. NO. NOOD30L225CU OR APPROVED FQUAL.

- 1. PANELBOARD BUS SHALL BE COPPER. NEUTRAL BUS SHALL BE COPPER, EQUIPMENT GROUND BARS SHALL BE COPPER.
- 2. INCLUDE ENGRAVED PHENOLIC LEGEND PLATE LABELED "PANEL B, 120/240 VAC, 1 PHASE, 3 WIRE, FED FROM SERVICE PANEL A".

### NOTES FOR FAN CONTROL SCHEMATIC

- 1. GROUND WIRES REQUIRED BUT NOT SHOWN FOR CLARITY.
- 2. ALL WIRING SHALL BE #12 THWN MINIMUM.
- 3. PROVIDE A NEMA 1 ENCLOSURE SIZED TO INSTALL THE CONTACTOR, HOA SELECTOR SWITCH & TERMINALS.
- PROVIDE LEGEND PLATE FOR THE CONTACTOR AND FRACTIONAL HP MOTOR STARTER IDENTIFYING THE LOAD SERVED 4. AND THE POWER SOURCE.
- VERIFY MOTOR HORSEPOWERS AND FULL LOAD AMPS WITH THE RESPECTIVE MANUFACTURER, CONTRACTOR SHALL 5. COORDINATE MOTOR CIRCUIT BREAKER, CONTACTOR, FRACTIONAL HP STARTER, OVERLOADS, WIRE SIZES, CONDUIT SIZES, ETC. FOR THE RESPECTIVE EQUIPMENT FURNISHED, PER NEC & MANUFACTURER'S RECOMMENDATIONS. COORDINATE FAN & LOUVER INSTALLATION WITH BUILDING MFR.

INTAKE LOUVERS SHALL OPEN AND EXHAUST FAN SHALL OPERATE WHEN SPACE TEMP EXCEEDS 85'F (ADJUSTABLE). EXHAUST FAN SHALL OPERATE ONLY WHEN DAMPER HAS PROVED "OPEN". IN MANUAL MODE DAMPER SHALL REMAIN 6. OPEN AND FAN SHALL RUN CONTINUOUSLY.

#### LEGEND

- 1 120VAC, NEMA SIZE O (MINIMUM), 1 POLE, FULL VOLTAGE CONTACTOR IN A NEMA 1 ENCLOSURE, SQUARE D CLASS 8502, TYPE SBGSV02 OR APPROVED EQUAL. INCLUDE H-O-A SELECTOR SWITCH WITH EACH CONTACTOR.
- 2) FRACTIONAL HORSEPOWER MOTOR MANUAL STARTER, SQUARE D MANUAL STARTER WITH HANDLE/GUARD/LOCK OFF, IN NEMA 1 ENCLOSURE CLASS 2510, TYPE FG5 OR APPROVED EQUAL. INCLUDE MELTING ALLOY TYPE THERMAL OVERLOADS SIZED AS REQUIRED TO PROTECT THE RESPECTIVE MOTOR. 120VAC MOTORS SHALL HAVE SINGLE POLE STARTERS.


BY				
			•	
REVISION				
DATE				

AIRPORT ITY, ILLINOIS MUNICIPAL AIRPENRY COUNTY, II KEWANEE MUNI KEWANEE, HENRY


HANSON


L SCHEDULES DETAILS PANEL & [


CONSTRUCT

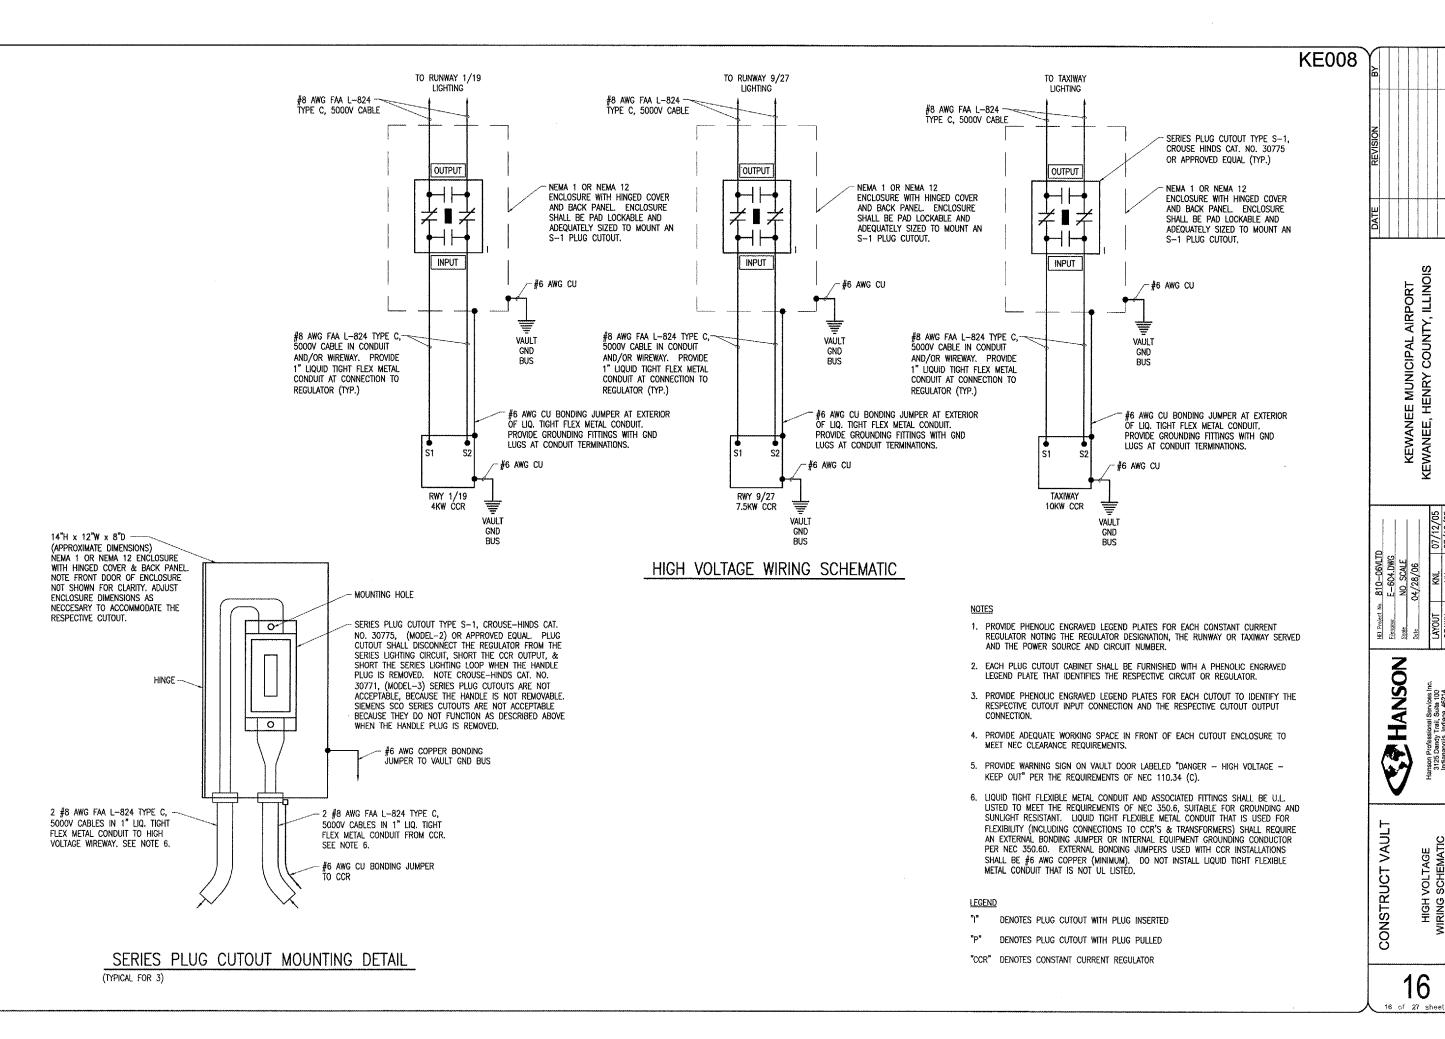

anson Professional Services Inc 3125 Dandy Trail, Suite 100 Indianapolis, Indiana 46214 Officas National HIGH VOLTAGE WIRING SCHEMATIC 16

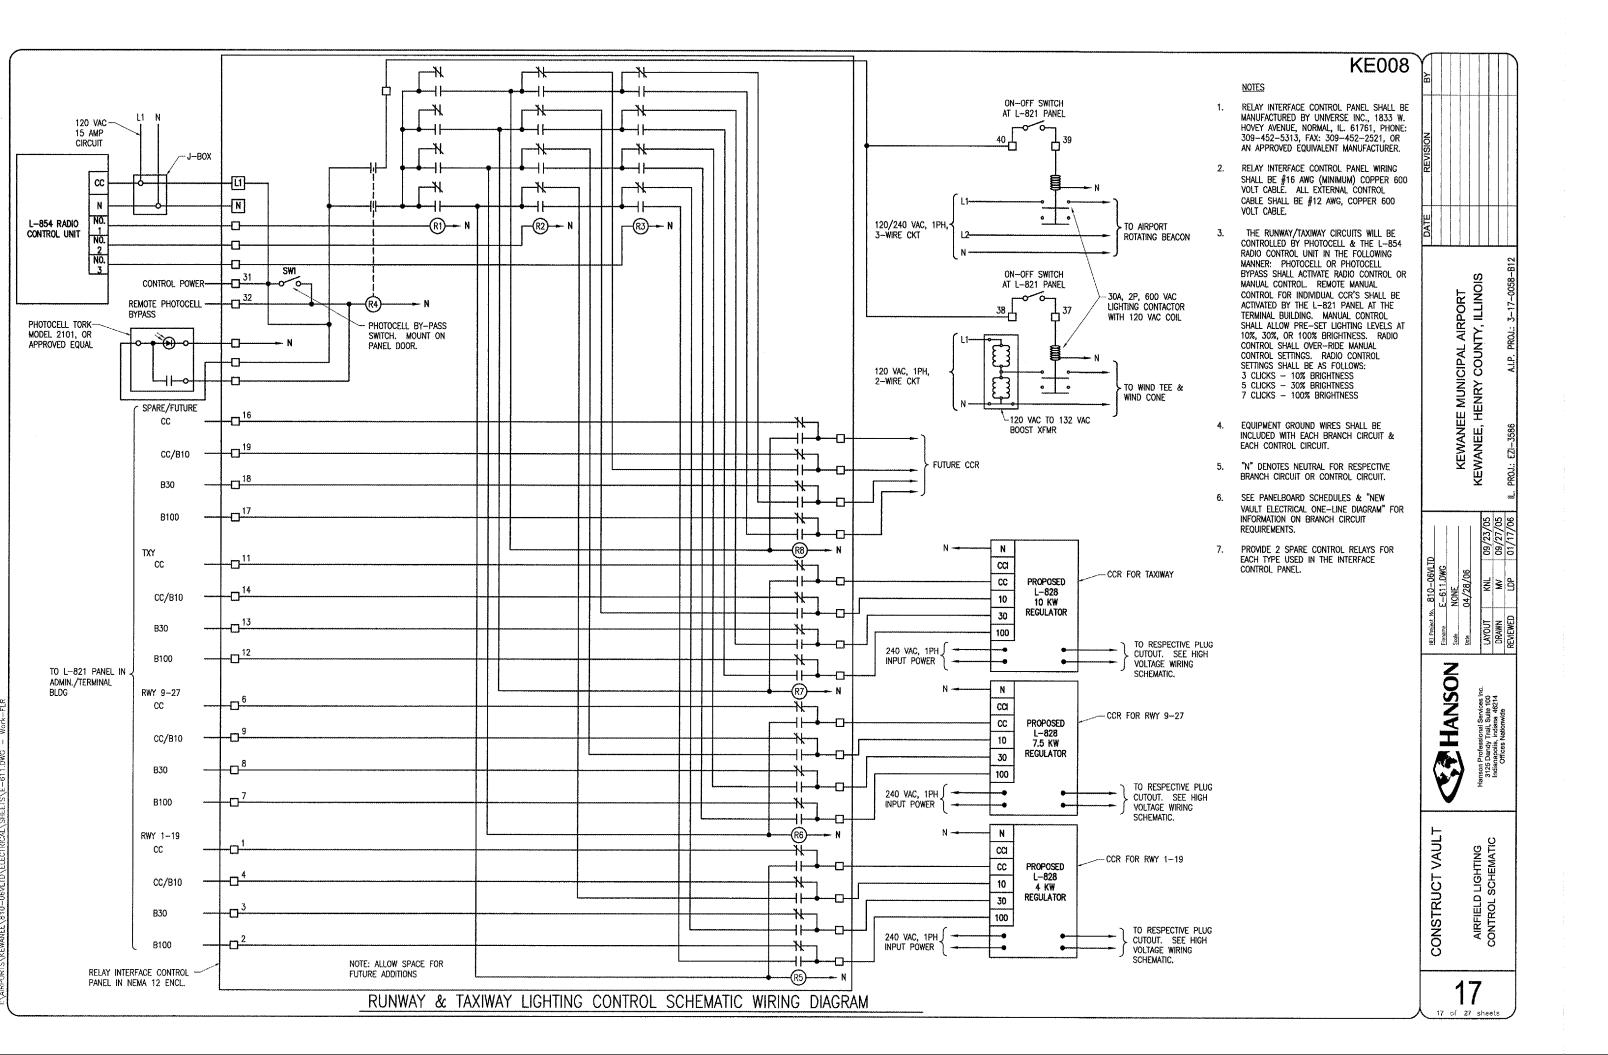

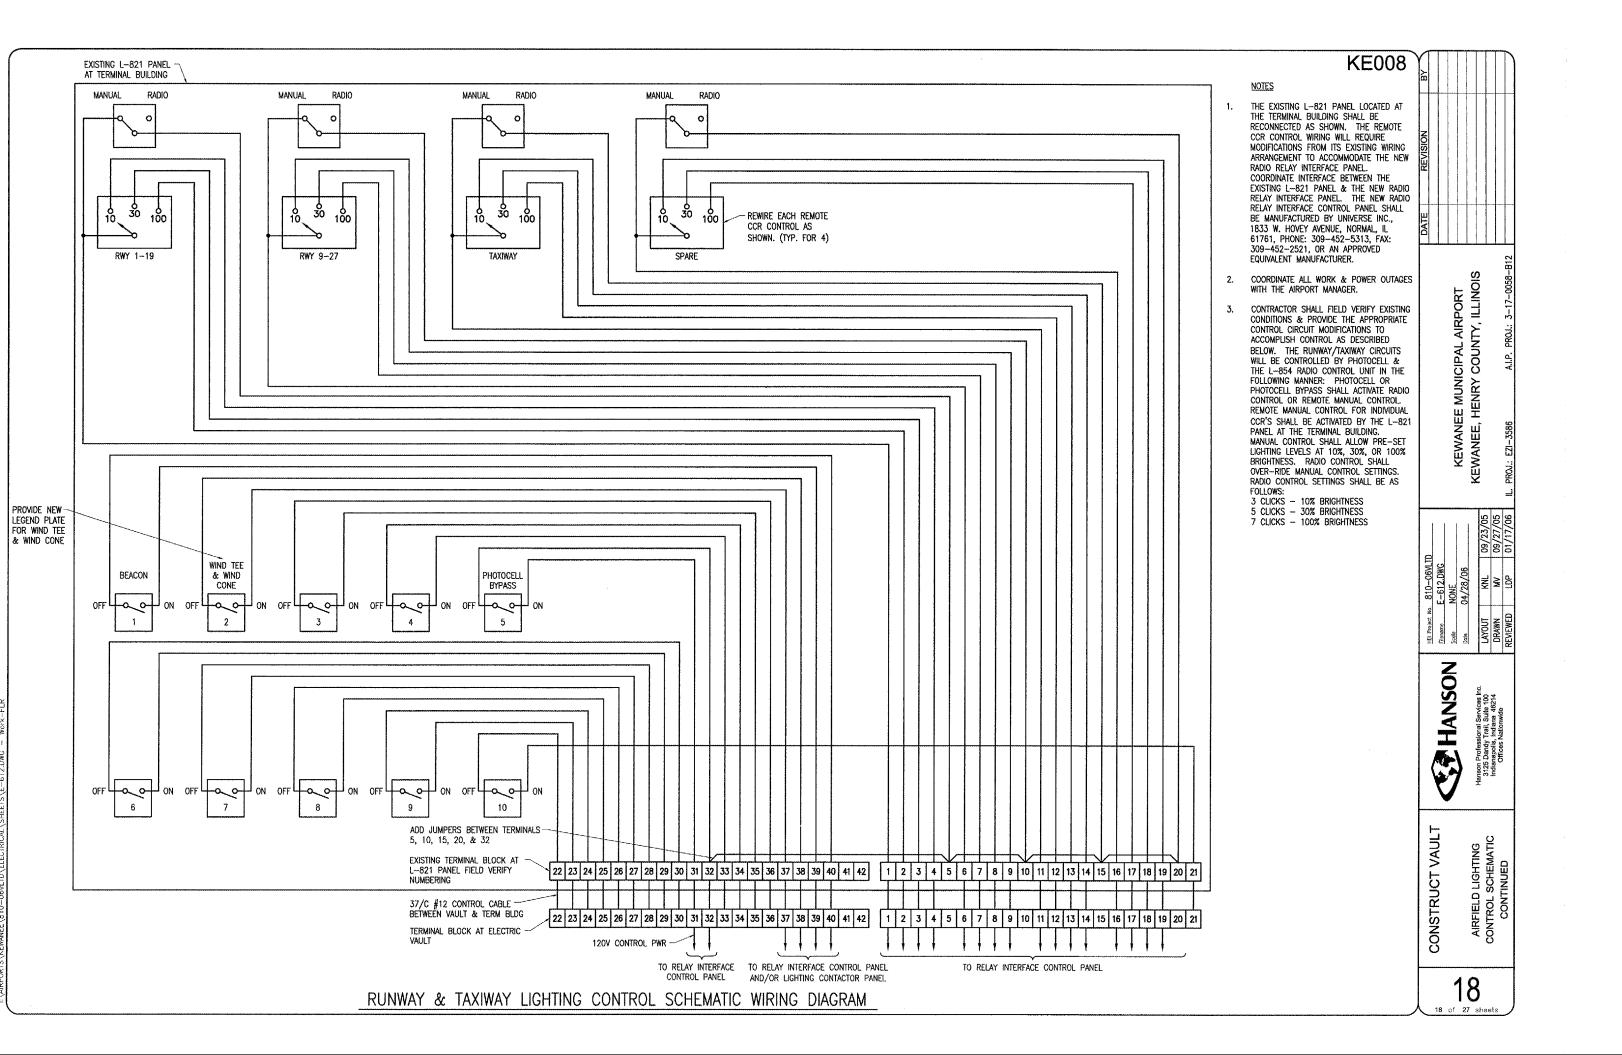

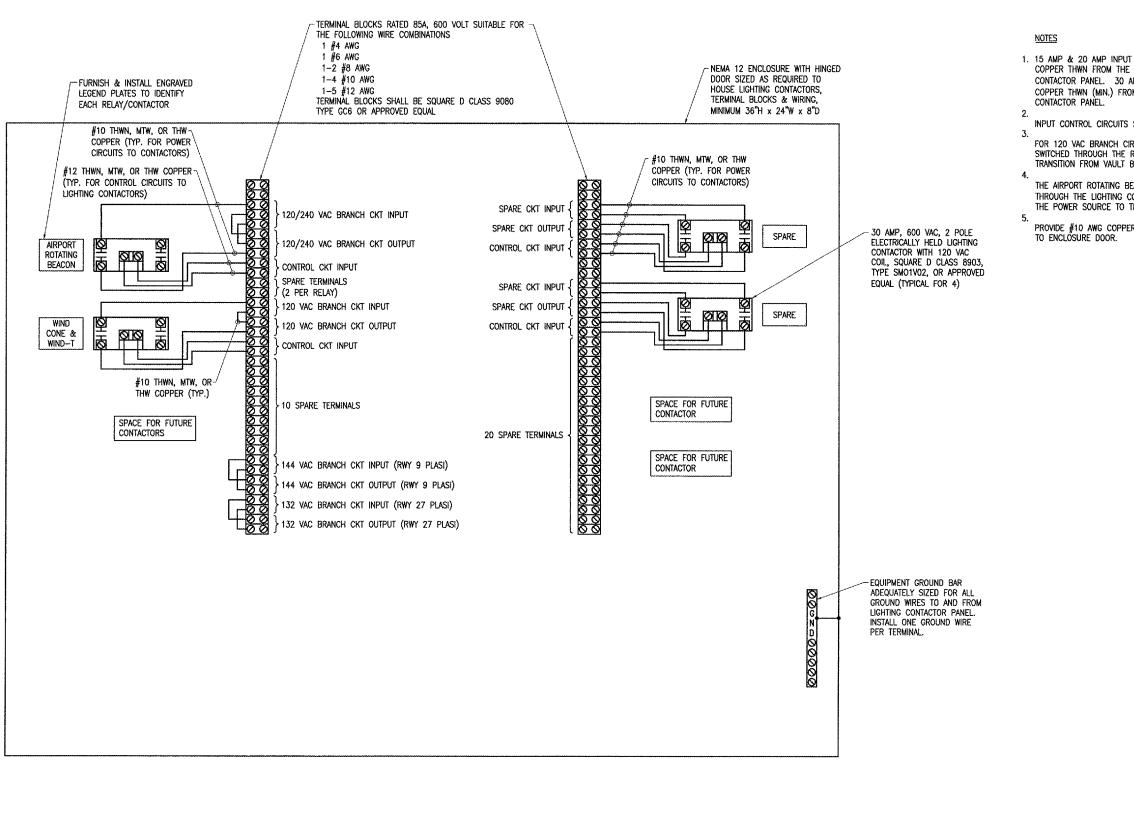

**KE008** 

1. 15 AMP & 20 AMP INPUT POWER/BRANCH CIRCUITS SHALL BE #10 AWG COPPER THWN FROM THE RESPECTIVE POWER SOURCE TO THE LIGHTING CONTACTOR PANEL. 30 AMP INPUT POWER/BRANCH CIRCUITS SHALL BE #8 AWG COPPER THWN (MIN.) FROM THE RESPECTIVE POWER SOURCE TO THE LIGHTING

INPUT CONTROL CIRCUITS SHALL BE #12 AWG COPPER THWN.

FOR 120 VAC BRANCH CIRCUITS THE NEUTRAL CONDUCTOR SHALL NOT BE SWITCHED THROUGH THE RELAY CONTACTS. USE TERMINAL BLOCKS TO TRANSITION FROM VAULT BRANCH CIRCUIT WIRING TO FIELD WIRING.

THE AIRPORT ROTATING BEACON CIRCUIT SHALL HAVE PHASE "A" SWITCHED THROUGH THE LIGHTING CONTACTOR. PHASE "B" SHALL BE UNSWITCHED FROM THE POWER SOURCE TO THE LOAD CENTER AT THE BEACON.

PROVIDE #10 AWG COPPER BONDING JUMPER FROM PANEL ENCLOSURE FRAME

KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS

HANSON anson Professional Services Inc 3125 Dandy Trail, Suite 100 Indianapolis, Indiana 46214 Offices Nationwide

LIGHTING CONTACTOR PANEL DETAIL

CONSTRUCT VAULT


19

19 of 27 sheets

VAULT LEGEND I	PLATE SCHEDULE
DEVICE	LABEL.
SERVICE PANELBOARD "A"	SERVICE PANEL "A" 120/240 VAC, 1 PH, 3 W
MAIN BREAKER IN SERVICE PANEL "A"	SERVICE DISCONNECT
PANELBOARD "B"	PANEL "B" 120/240 VAC, 1 PH, 3 W
RUNWAY 1-19 CCR	RUNWAY 1-19
TAXIWAY CCR	TAXIWAY
RUNWAY 9-27 CCR	RUNWAY 9-27
CUTOUT ENCLOSURE FOR RUNWAY 1-19	RUNWAY 1~19 CUTOUT
CUTOUT ENCLOUSRE FOR TAXIWAY	TAXIWAY CUTOUT
CUTOUT ENCLOSURE FOR RUNWAY 9-27	RUNWAY 9-27 CUTOUT
EACH CUTOUT INPUT SIDE CONNECTION	INPUT
EACH CUTOUT OUTPUT SIDE CONNECTION	OUTPUT
RADIO INTERFACE PANEL FOR RUNWAYS & TAXIWAY	RADIO RELAY INTERFACE CONTROL PANEL
LIGHTING CONTACTOR PANEL	LIGHTING CONTACTOR PANEL FOR AIRFIELD LIGHTING EQUIPMENT
BOOST TRANSFORMER FOR RUNWAY 9 PLASI	RWY 9 PLASI
BOOST TRANSFORMER FOR RUNWAY 27 PLASI	RWY 27 PLASI
BOOST TRANSFORMER FOR WIND CONE	WIND CONE & WIND TEE
LOW VOLTAGE WIREWAY (PROVIDE 4 LEGEND PLATES 1/2" HIGH BLACK LETTERS WHITE BACKGROUND)	LOW VOLTAGE
HIGH VOLTAGE WIREWAY (PROVIDE 4 LEGEND PLATES 1/2" HIGH BLACK LETTERS WHITE BACKGROUND)	HIGH VOLTAGE
VAULT GROUND BUS (PROVIDE 4 LEGEND PLATES 1/2" HIGH WHITE LETTERS GREEN BACKGROUND)	VAULT GROUND BUS

NOTE: LEGEND PLATES SHALL BE WEATHERPROOF ENGRAVED PLASTIC OR PHENOLIC MATERIAL, 1/4" HIGH BLACK LETTERS ON A WHITE BACKGROUND UNLESS NOTED OTHERWISE. SECURE WITH WEATHERPROOF ADHESIVE AND MACHINE SCREWS. FURNISH ADDITIONAL LEGEND PLATES WHERE REQUIRED BY CODE, FOR ADDITIONAL EQUIPMENT, AS DETAILED HEREIN ON THE PLANS, AND AS NOTED IN THE SPECIAL PROVISION SPECIFICATIONS.


**KE008** 



120 VAC TO 132 VAC BOOST TRANSFORMER

CONNECTION DIAGRAM FOR SQUARE D

CAT. NO. 250SV43B OR CAT. NO. 500SV43B TRANSFORMER

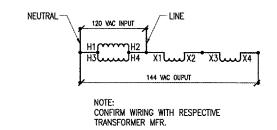

120 VAC TO 144 VAC BOOST TRANSFORMER

CONNECTION DIAGRAM FOR SQUARE D

CAT. NO. 500SV43B TRANSFORMER

			`
DATE	REVISION	Β¥	
			ľ


KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS

H/28/06 KNL 07/12/05 WV 09/27/05


HANSON

LEGEND PLATE SCHEDULE AND TRANSFORMER WIRING DIAGRAMS


CONSTRUCT VAULT








CABLE TO GROUND ROD



CABLE TO GROUND ROD

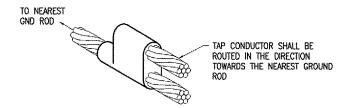


CABLE TO CABLE HORIZONTAL PARALLEL TAP

#### DETAIL NOTES

- . EXOTHERMIC WELDS SHALL BE CADWELD AS MANUFACTURED BY ERICO PRODUCTS, SOLON, OHIO OR THERMOWELD AS MANUFACTURED BY CONTINENTAL INDUSTRIES, TULSA, OKLAHOMA. VERIFY PROPER SIZES, TYPES, AND REQUIREMENTS FOR THE RESPECTIVE APPLICATION WITH THE MANUFACTURER, AND INSTALL PER
- 2. FOR APPLICATIONS TO METAL SURFACES THAT ARE LESS THAN 3/16" THICK CONTACT THE EXOTHERMIC WELD MANUFACTURER FOR DIRECTION AND INSTRUCTION ON EXOTHERMIC WELD INSTALLATION TO THE RESPECTIVE
- 3. FOR APPLICATIONS TO GALVANIZED STEEL OR PAINTED STEEL, REMOVE GALVANIZING AND/OR PAINT & CLEAN THE SURFACE TO EXPOSE BARE STEEL BEFORE MAKING EXOTHERMIC WELD CONNECTION.
- INDIVIDUAL GROUNDING ELECTRODE CONDUCTORS SHALL NOT BE INSTALLED IN METAL CONDUIT, INSTALL GROUNDING ELECTRODE CONDUCTORS IN SCHED 40 PVC CONDUIT AS REQUIRED IN FOUNDATIONS, FOR PROTECTION, WHERE ENTERING ENCLOSURES, ETC.

# EXOTHERMIC WELD DETAILS

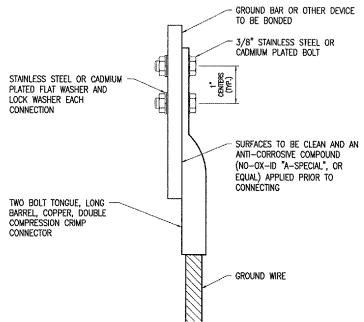


2 HOLE LONG BARREL COMPRESSION LUG TABLE								
WIRE SIZE	BURNDY CAT. NO.	THOMAS & BETTS CAT. NO.						
#6 AWG STRANDED	YA6C-2TC38	256-30695-1158						
#4 AWG STRANDED	YA4C-2TC38	256-30695-1159						
#2 AWG STRANDED	YA2C-2TC38	256306951160						
#2 AWG SOLID	YA3C-2TC38	256-30695-1160						
#1/0 AWG STRANDED	YA25-2TC38	256-30695-1162						
#2/0 AWG STRANDED	YA26-2TC38	256-30695-1116						
#3/0 AWG STRANDED	YA27-2TC38	54816BE						

#### NOTES

- 1. ALL CONNECTIONS TO GROUND BUS BAR SHALL BE WITH 2 HOLE TONGUE LONG BARREL COMPRESSION LUGS BOLTED TO THE BUS BAR.
- 2. GROUND WIRE CONNECTIONS TO EQUIPMENT SHALL BE WITH 2 HOLE TONGUE LONG BARREL COMPRESSION LUGS BOLTED TO THE DEVICE OR WITH THE RESPECTIVE EQUIPT MANUFACTURER'S LUG OR TERMINAL WHERE APPLICABLE.
- 3. GROUNDING ELECTRODE CONDUCTORS, BONDING JUMPERS, & INDIVIDUAL GROUND WIRES SHALL NOT BE INSTALLED IN METAL CONDUIT.
- 4. ALL CONNECTIONS SHALL BE COATED WITH A CORROSION PREVENTATIVE COMPOUND (SANCHEM INC. NO-OX-ID "A-SPECIAL", BURNDY PENETROX E, OR EQUAL) BEFORE JOINING. ALL COPPER BUS BARS SHALL BE CLEANED PRIOR TO MAKING CONNECTIONS TO REMOVE SURFACE OXIDATION. CLEAN SURFACES. OF RESPECTIVE DEVICES TO BE BONDED, TO BARE METAL, PER NEC 250-12.

## GROUNDING LUG CONNECTION DETAIL

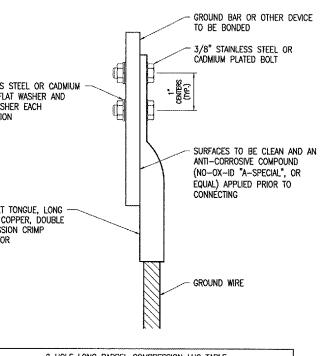


2 HOLE LONG BARREL COMPRESSION LUG TABLE									
WIRE SIZE	BURNDY CAT. NO.	THOMAS & BETTS CAT. NO.							
#6 AWG STRANDED	YA6C-2TC38	256-30695-1158							
#4 AWG STRANDED	YA4C-2TC38	256-30695-1159							
#2 AWG STRANDED	YA2C-2TC38	256-30695-1160							
#2 AWG SOLID	YA3C-2TC38	256-30695-1160							
#1/0 AWG STRANDED	YA25-2TC38	256-30695-1162							
#2/0 AWG STRANDED	YA26-2TC38	256-30695-1116							
#3/0 AWG STRANDED	YA27-2TC38	54816BF							

#### NOTE:

LIDS FOR LOW VOLTAGE HANDHOLES SHALL BE LABELED "LOW VOLTAGE". LIDS FOR HIGH VOLTAGE HANDHOLES SHALL BE LABELED "HIGH VOLTAGE". COORDINATE LETTERING WITH MFR.

## ELECTRICAL HANDHOLE DETAIL

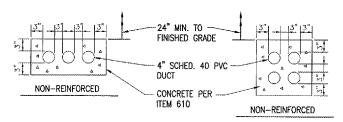


#### NOTES:

- 1.) ALL DIMENSIONS ARE MINIMUM.
- 2.) INCLUDE DUCT SPACERS AS MANUFACTURED BY UNDERGROUND DEVICES INC., TO MAINTAIN PROPER SEPARATION OF CONDUITS.

# CONCRETE ENCASED DUCT DETAIL

(3-WAY & 4-WAY SHOWN)

**KE008** 

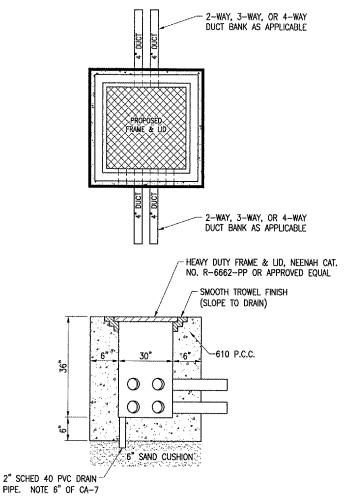


GRAVEL MAY BE PROVIDED, INSTEAD OF 6" CONCRETE FLOOR WITH DRAIN PIPE, AT CONTRACTORS OPTION.



KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS


CONSTRUCT VAULT ELECTRICAL AND GROUNDING DETAILS

21 of 27 shee

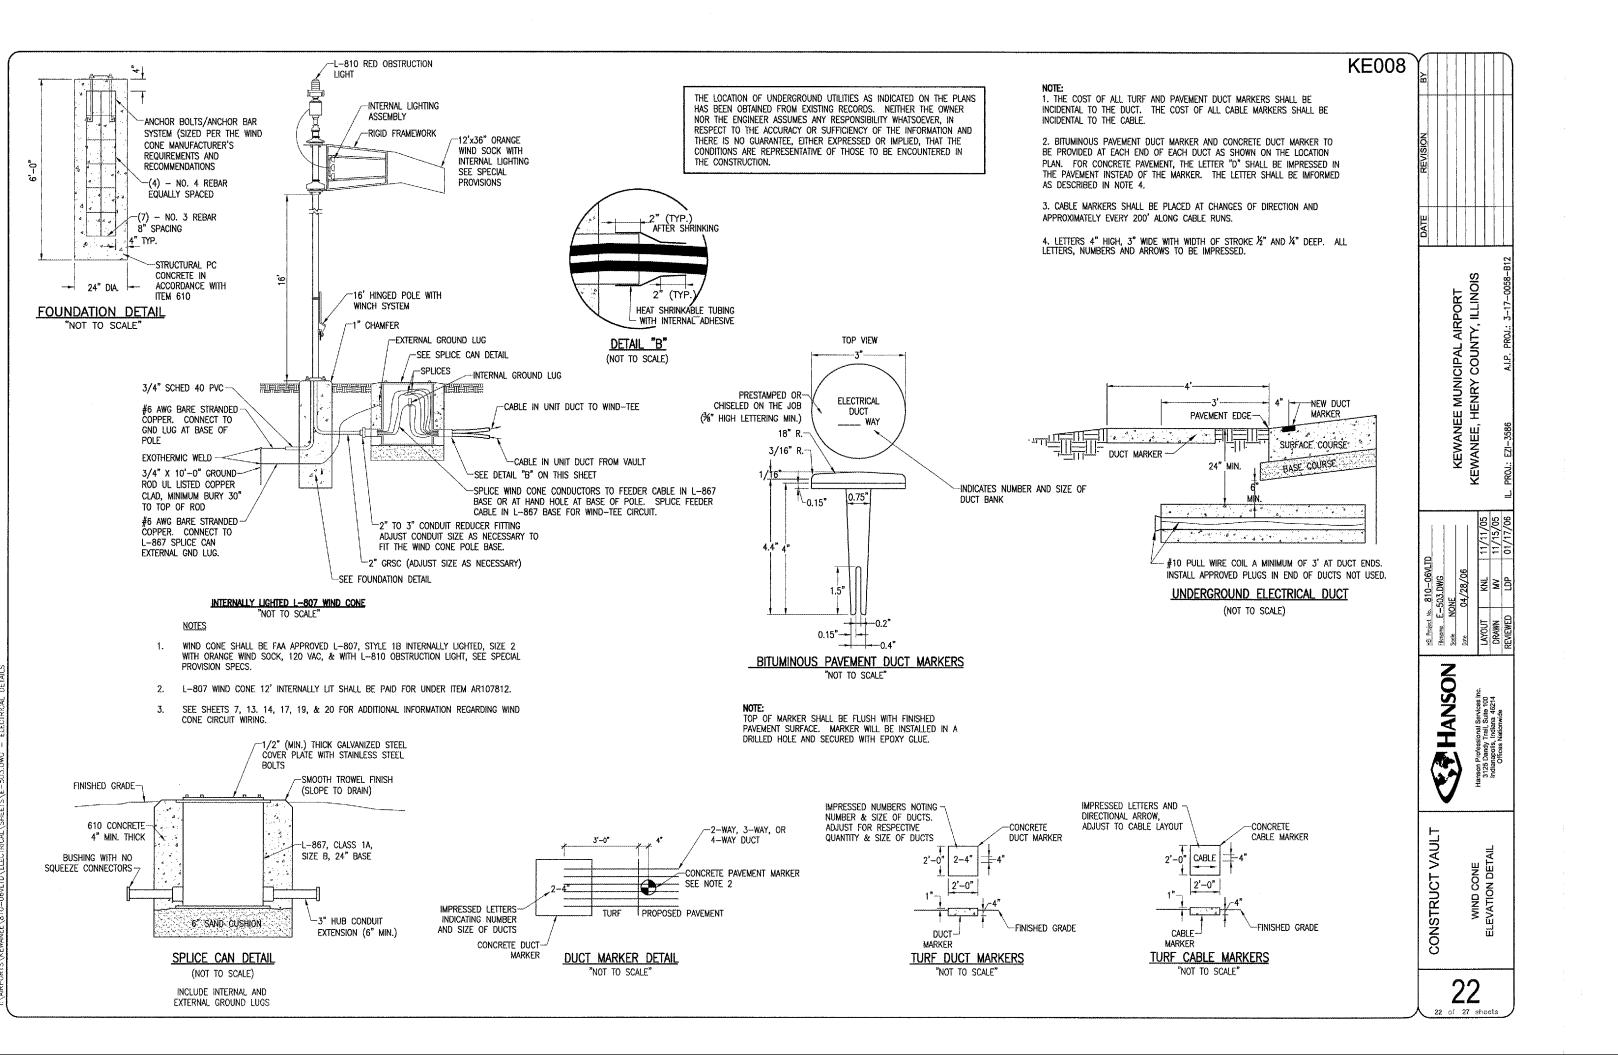


#### NOTES

- 1. PLASI UNITS LOCATED ON RUNWAY 9-27 ARE EXISTING. A HEAVY DUTY 60 AMP, 2 POLE OR 3 POLE WITH SOLID NEUTRAL & GND, 600 VAC NOT FUSIBLE SAFETY SWITCH IN A NEMA 3R AND 12 ENCLOSURE SHALL BE FURNISHED & INSTALLED AT EACH PLASI. 60 AMP SAFETY SWITCH IS REQUIRED TO ACCOMMODATE #4 AWG OR #2 AWG CONDUCTORS FOR LUG TERMINATIONS & WIRE BENDING SPACE. NEUTRAL SHALL BE BONDED TO GROUND IN SAFETY SWITCH & GND ROD SHALL BE INSTALLED TO CONFORM WITH NEC 250.32
- LTFMC DENOTES LIQUID TIGHT FLEXIBLE METAL CONDUIT UL LISTED, SUITABLE FOR GROUNDING, AND SUNLIGHT
  RESISTANT. NEC 350.6 NOTES LIQUID TIGHT FLEXIBLE METAL CONDUIT AND ASSOCIATED FITTINGS SHALL BE
  LISTED. DO NOT INSTALL LTFMC THAT IS NOT UL LISTED.
- 3. CONTRACTOR SHALL FURNISH & INSTALL BOOST TRANSFORMERS FOR PLASI UNITS IN THE VAULT. BOOST TRANSFORMERS SHALL BE SIZED & CONNECTED TO PROVIDE THE PROPER VOLTAGE AT THE RESPECTIVE PLASI UNIT AS RECOMMENDED BY THE PLASI MANUFACTURER (DEVORE AVIATION CORPORATION, 6104 JEFFERSON BLVD, N.E., ALBUQUERQUE, NEW MEXICO 87109-3410, PHONE: 505-345-8713, FAX: 505-344-3835).
- INSTALLATION OF THE SAFETY SWITCH AND ASSOCIATED CONDUIT, WIRING, FITTINGS, GROUNDING, & ACCESSORIES FOR EACH PLASI UNIT SHALL BE PAID FOR UNDER ITEM AR125989 REFURBISH PLASI PER EACH.
- 5. SEE SHEETS 38, 42, 43, & 49 FOR ADDITIONAL INFORMATION REGARDING PLASI CIRCUIT WIRING.

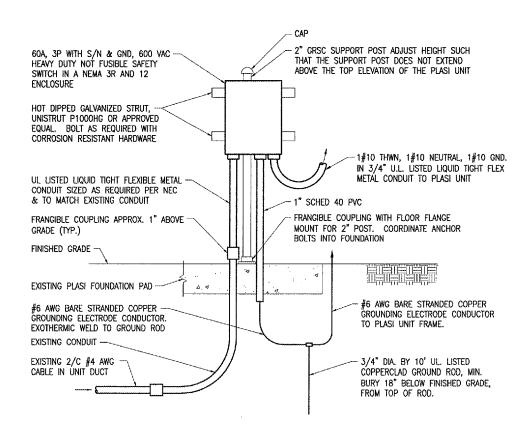


NOTE: SEE NEW ELECTRICAL ONE LINE DIAGRAM FOR VAULT AND PLASI FOR ADDITIONAL INFORMATION ON EQUIPMENT AND WIRING.

PLASI SAFETY SWITCH ELEVATION
"NOT TO SCALE"

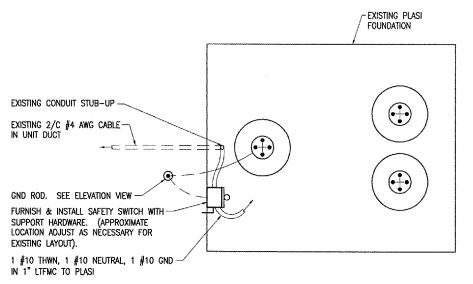

PLASI FOUNDATION PLAN VIEW

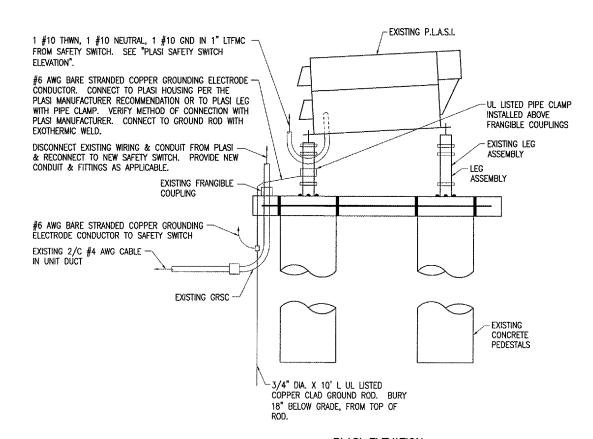

PLASI ELEVATION

ALL WORK SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER ITEM AR125989 — REFURBISH PLASI — PER EA.

AIRPORT
TY, ILLINOIS

**KE008** 

KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS

THE PROBEST NO. 103-00VLIU

FRANKLIN E-610.DWG

Sincle NO.NE

Date 04/28/06

ANOLIT KNII GO 777/

Hanson Professional Services Inc.
3125 Dandy Trail, Suite 100
Indianapolis, Indiana 48214
Offices Nationalda

CONSTRUCT VAULT

PROPOSED II WIRING DETAILS & NOTES


PLAS

23

PORTS/KEWANEE\810-06VLTD\ELECTRICAL\SH



#### CABLE TO GROUND ROD




CABLE TO SURFACE

#### DETAIL NOTES


- EXOTHERMIC WELDS SHALL BE CADWELD AS MANUFACTURED BY ERICO PRODUCTS, SOLON, OHIO, ULTRAWELD AS MANUFACTURED BY HARGER LIGHTNING PROTECTION & GROUNDING EQUIPMENT, GRAYSLAKE, IL, OR THERMOWELD AS MANUFACTURED BY CONTINENTAL INDUSTRIES, TULSA, OKLAHOMA, VERIFY PROPER SIZES, MOLDS, TYPES, AND REQUIREMENTS FOR THE RESPECTIVE APPLICATION WITH THE MANUFACTURER, AND INSTALL PER THEIR DIRECTIONS.
- 2. FOR APPLICATIONS TO GALVANIZED STEEL OR PAINTED STEEL, REMOVE GALVANIZING AND/OR PAINT & CLEAN THE SURFACE TO EXPOSE BARE STEEL BEFORE MAKING
- 3. VERIFY EXOTHERMIC MOLDS ARE SUITABLE FOR USE WITH THE RESPECTIVE TYPE (SOLID OR STRANDED) & SIZE CONDUCTOR.


## EXOTHERMIC WELD DETAILS

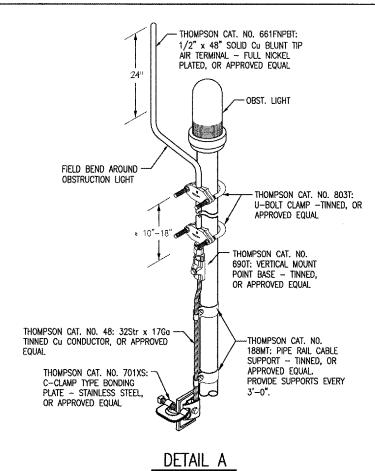

### NOTES

- REFERENCES TO THOMPSON ARE THOMPSON LIGHTNING PROTECTION INC., 901 SIBLEY MEMORIAL HWY, ST. PAUL, MN 55188, PHONE: 651-455-7661, 800-777-1230, FAX: 651-455-2545.
- VERIFY LIGHTNING PROTECTION COMPONENTS AND CATALOG NUMBERS WITH THE RESPECTIVE LIGHTNING PROTECTION EQUIPMENT

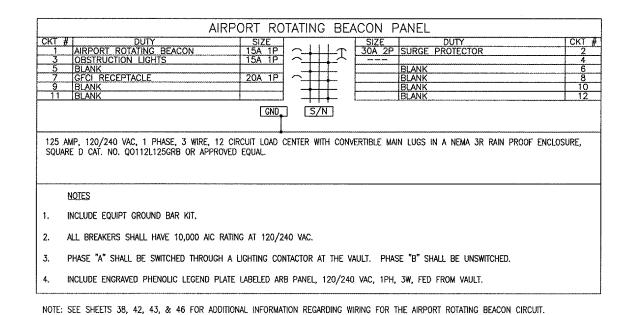

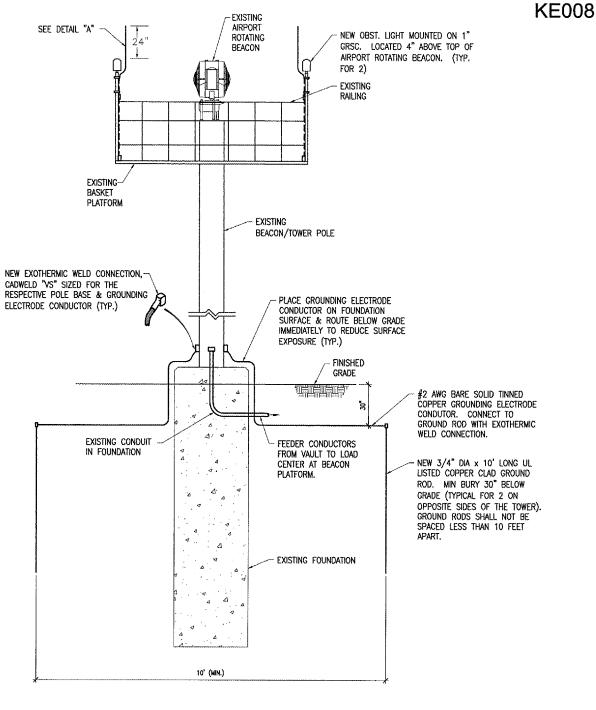

LIGHTNING PROTECTION DETAIL FOR AIRPORT ROTATING BEACON

> ALL WORK SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER ITEM AR800591 -UPGRADE AIRPORT ROTATING BEACON -PER L.S.


24 of 27 sheet:

LIGHTNING PROTECTION DETAILS FOR BEACON

HANSON

CONSTRUCT VAULT

KEWANEE MUNICIPAL AIRPORT KEWANEE, HENRY COUNTY, ILLINOIS

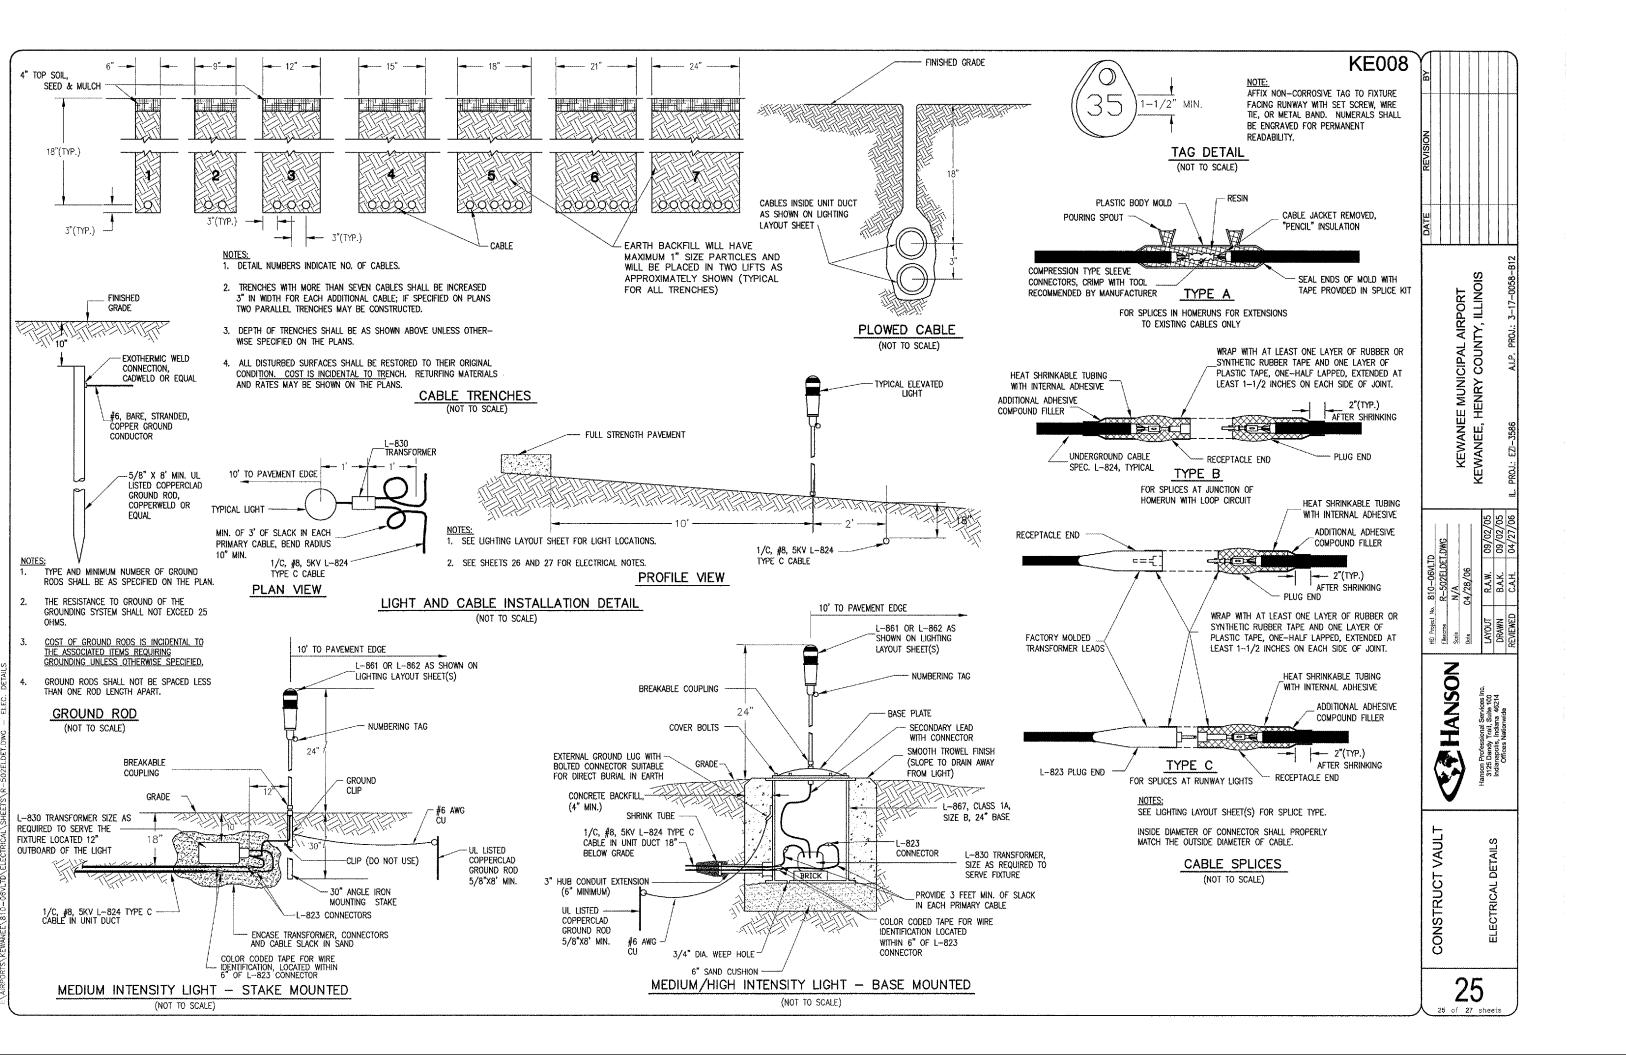

# **KE008**

## **GENERAL** THE ELECTRICAL INSTALLATION, AS A MINIMUM, SHALL MEET THE NATIONAL

LIGHTING SYSTEM

- ELECTRICAL CODE (LATEST RECOGNIZED VERSION) AND LOCAL REGULATIONS. THE CONTRACTOR SHALL ASCERTAIN THAT ALL LIGHTING SYSTEM COMPONENTS FURNISHED BY HIM, INCLUDING FAA APPROVED EQUIPMENT, ARE COMPATIBLE IN ALL RESPECTS WITH EACH OTHER AND THE REMAINDER OF THE NEW/EXISTING SYSTEM. ANY NONCOMPATIBLE COMPONENTS FURNISHED BY THIS CONTRACTOR SHALL BE REPLACED BY HIM AT NO ADDITIONAL COST TO THE AIRPORT SPONSOR WITH A SIMILAR UNIT, APPROVED BY THE ENGINEER (DIFFERENT MODEL OR DIFFERENT
- IN CASE THE CONTRACTOR ELECTS TO FURNISH AND INSTALL AIRPORT LIGHTING EQUIPMENT REQUIRING ADDITIONAL WIRING, TRANSFORMERS, ADAPTORS, MOUNTINGS, ETC., TO THOSE SHOWN ON THE DRAWINGS AND/OR LISTED IN THE SPECIFICATION, ANY COST FOR THESE ITEMS SHALL BE INCIDENTAL TO THE EQUIPMENT COST.

MANUFACTURER) THAT IS COMPATIBLE WITH THE REMAINDER OF THE AIRPORT

- THE CONTRACTOR INSTALLED EQUIPMENT (INCLUDING FAA APPROVED) SHALL NOT GENERATE ANY ELECTROMAGNETIC INTERFERENCE IN THE EXISTING AND/OR NEW COMMUNICATIONS, WEATHER, AIR NAVIGATION, AND AIR TRAFFIC CONTROL EQUIPMENT, ANY EQUIPMENT GENERATING SUCH INTERFERENCE SHALL BE REPLACED BY THE CONTRACTOR AT NO ADDITIONAL COST WITH THE EQUIPMENT MEETING THE APPLICABLE SPECIFICATIONS AND NOT GENERATING ANY INTERFERENCE.
- WHEN A SPECIFIC TYPE, STYLE, CLASS, ETC. OF FAA APPROVED EQUIPMENT IS SPECIFIED ONLY THAT TYPE, STYLE, CLASS, WILL BE ACCEPTABLE, EVEN THOUGH EQUIPMENT OF OTHER TYPES STYLES, CLASSES, ETC. MAY BE
- ANY AND ALL INSTRUCTIONS FROM THE ENGINEER TO THE CONTRACTOR REGARDING CHANGES IN OR DEVIATIONS FROM THE PLANS AND SPECIFICATIONS SHALL BE IN WRITING WITH COPIES SENT TO THE AIRPORT SPONSOR AND THE FAA FIELD OFFICE (ADO/AFO). THE CONTRACTOR SHALL NOT ACCEPT ANY VERBAL INSTRUCTIONS FROM THE RESIDENT ENGINEER REGARDING ANY CHANGES FROM THE PLANS AND SPECIFICATIONS
- A MINIMUM OF THREE COPIES OF THE INSTRUCTION BOOK SHALL BE SUPPLIED WITH EACH DIFFERENT TYPE OF EQUIPMENT. THE BOOKS DESCRIBING A MORE SOPHISTICATED TYPE OF EQUIPMENT, SUCH AS REGULATORS, PAPI, REIL, ETC. AS A MINIMUM SHALL CONTAIN THE
  - A DETAILED DESCRIPTION OF THE OVERALL EQUIPMENT AND ITS INDIVIDUAL COMPONENTS.
  - THEORY OF OPERATION INCLUDING THE FUNCTION OF EACH COMPONENT.
  - INSTALLATION INSTRUCTIONS.
  - START-UP INSTRUCTIONS.
  - PREVENTATIVE MAINTENANCE REQUIREMENTS.
  - CHART FOR TROUBLE-SHOOTING.
  - COMPLETE POWER AND CONTROL DETAILED WIRING DIAGRAM(S), SHOWING EACH CONDUCTOR/CONNECTION/COMPONENT - "BLACK" BOXES ARE NOT ACCEPTABLE. THE DIAGRAM OF THE NARRATIVE SHALL SHOW VOLTAGE/CURRENTS/WAVE SHAPES AT STRATEGIC LOCATIONS TO BE USED WHEN CHECKING AND/OR TROUBLE-SHOOTING THE EQUIPMENT. WHEN THE EQUIPMENT HAS SEVERAL MODES OF OPERATION, SUCH AS SEVERAL BRIGHTNESS STEPS, THESE PARAMETERS SHALL BE INDICATED FOR ALL DIFFFRENT MODES.
  - PARTS LIST WHICH WILL INCLUDE ALL MAJOR AND MINOR COMPONENTS SUCH AS RESISTORS, DIODES, ETC. IT SHALL INCLUDE A COMPLETE NOMENCLATURE OF EACH COMPONENT AND, IF APPLICABLE, THE NAME OF ITS MANUFACTURER AND THE CATALOG NUMBER.
- SAFETY INSTRUCTIONS.

#### POWER AND CONTROL

- STENCIL ALL ELECTRICAL EQUIPMENT TO IDENTIFY FUNCTION, CIRCUIT VOLTAGE AND PHASE. WHERE THE EQUIPMENT CONTAINS FUSES, ALSO STENCIL. THE FUSE OR FUSE LINK AMPERE RATING. WHERE THE EQUIPMENT DOES NOT HAVE SUFFICIENT STENCILING AREA, THE STENCILING SHALL BE DONE ON THE WALL NEXT TO THE UNIT. THE LETTERS SHALL BE ONE INCH HIGH AND PAINTED IN WHITE OR BLACK TO PROVIDE THE HIGHEST CONTRACT WITH THE BACKGROUND.
- COLOR CODE ALL PHASE WIRING BY THE USE OF COLORED WIRE INSULATION AND/OR COLORED TAPE. WHERE TAPE IS USED, THE WIRE INSULATION SHALL BE BLACK, BLACK AND RED SHALL BE USED FOR SINGLE-PHASE, THREE WIRE SYSTEMS AND BLACK, RED AND BLUE SHALL BE USED FOR THREE-PHASE SYSTEMS. NEUTRAL CONDUCTORS, SIZE NO. 6 AWG OR SMALLER, SHALL BE IDENTIFIED BY A CONTINUOUS WHITE OR NATURAL GRAY OUTER FINISH ALONG ITS ENTIRE LENGTH, NEUTRAL CONDUCTORS LARGER THAN NO. 6 AWG SHALL BE IDENTIFIED EITHER BY A CONTINUOUS WHITE OR NATURAL GRAY OUTER FINISH ALONG ITS ENTIRE LENGTH OR BY THE USE OF WHITE TAPE AT ITS TERMINATIONS AND INSIDE ACCESSIBLE WIREWAYS.
- ALL BRANCH CIRCUIT CONDUCTORS CONNECTED TO A PARTICULAR PHASE SHALL BE IDENTIFIED WITH THE SAME COLOR. THE COLOR CODING SHALL BE
- IN CONTROL WIRING THE SAME COLOR SHALL BE USED THROUGHOUT THE SYSTEM FOR THE SAME FUNCTION, SUCH AS 10%, 30%, 100% BRIGHTNESS
- LOW VOLTAGE (600 V.) AND HIGH VOLTAGE (5000 V.) CONDUCTORS SHALL BE INSTALLED IN SEPÁRATE WIREWAYS.
- NEATLY LACE WIRING IN DISTRIBUTION PANELS, WIREWAYS, SWITCHES AND JUNCTION/PULL BOXES.
- THE MINIMUM SIZE OF PULL/JUNCTION BOXES, REGARDLESS OF THE QUANTITY AND SIZE OF THE CONDUCTORS SHOWN, SHALL BE AS FOLLOWS:
  - IN STRAIGHT PULLS THE LENGTH OF THE BOX SHALL NOT BE LESS THAN EIGHT TIMES THE TRADE DIAMETER OF THE LARGER CONDUIT. THE TOTAL AREA (INCLUDING THE CONDUIT CROSS-SECTIONAL AREA) OF A BOX END SHALL BE AT LEAST 3 TIMES GREATER THAN THE TOTAL TRADE CROSS-SECTIONAL AREA OF THE CONDUITS TERMINATING AT THE END.
  - IN ANGLE PULLS OR 'U' PULLS THE DISTANCE BETWEEN EACH CONDUIT ENTRY INSIDE THE BOX AND THE OPPOSITE WALL OF THE BOX SHALL NOT BE LESS THAN SIX (6) TIMES THE TRADE DIAMETER OF THE LARGEST CONDUIT. THIS DISTANCE SHALL BE INCREASED FOR ADDITIONAL ENTRIES BY THE AMOUNT OF THE SUM OF THE DIAMETERS OF ALL OTHER CONDUIT ENTRIES ON THE SAME WALL AS THE BOX. THE DISTANCE BETWEEN CONDUIT ENTRIES ENCLOSING THE SAME CONDUCTOR SHALL NOT BE LESS THAN SIX TIMES THE TRADE DIAMETER OF THE LARGEST CONDUIT.
- 8. A RUN OF CONDUIT BETWEEN TERMINATIONS AT EQUIPMENT ENCLOSURES, SQUARE DUCTS AND PULL/JUNCTION BOXES, SHALL NOT CONTAIN MORE THAN THE EQUIVALENT OF FOUR QUARTER BENDS (360 DEGREES TOTAL), INCLUDING THOSE BENDS LOCATED IMMEDIATELY AT THE TERMINATIONS, CAST. CONDUIT TYPE OUTLETS SHALL NOT BE TREATED AS PULL/JUNCTION BOXES.
- EQUIPMENT CABINETS SHALL NOT BE USED AS PULL/JUNCTION BOXES. ONLY WIRING TERMINATING AT THE EQUIPMENT SHALL BE BROUGHT INTO THESE
- SPLICES AND JUNCTION POINTS SHALL BE PERMITTED ONLY IN JUNCTION BOXES, DUCTS EQUIPPED WITH REMOVABLE COVERS, AND AT EASILY ACCESSIBLE LOCATIONS.
- CIRCUIT BREAKERS IN POWER DISTRIBUTION PANEL(S) SHALL BE THERMAL-MAGNETIC MOLDED CASE, PERMANENT TRIP WITH 100 AMPERE,

- 12. DUAL LUGS SHALL BE USED WHERE TWO (2) WIRES, SIZE NO. 6 OR LARGER, ARE TO BE CONNECTED TO THE SAME TERMINAL
- 13. ALL WALL MOUNTED EQUIPMENT ENCLOSURES SHALL BE MOUNTED ON WOODEN MOUNTING BOARDS.
- 14. WOODEN EQUIPMENT MOUNTING BOARDS SHALL BE PLYWOOD, EXTERIOR TYPE, 3/4 INCH, MINIMUM, THICKNESS, BOTH SIDES PAINTED WITH ONE COAT OF PRIMER AND TWO COATS OF GRAY OIL-BASED PAINT.
- 15. RIGID STEEL CONDUIT SHALL BE USED THROUGHOUT THE INSTALLATION UNLESS OTHERWISE SPECIFIED. THE MINIMUM TRADE SIZE SHALL BE 3/4
- 16. ALL RIGID CONDUIT SHALL BE TERMINATED AT CONSTANT CURRENT REGULATORS WITH A SECTION (10" MINIMUM) OF FLEXIBLE CONDUIT.
- UNLESS OTHERWISE SHOWN, ALL EXPOSED CONDUITS SHALL BE RUN PARALLEL TO OR AT RIGHT ANGLES WITH THE LINES OF THE STRUCTURE.
- 18. ALL STEEL CONDUITS, FITTINGS, NUTS, BOLTS, ETC. SHALL BE GALVANIZED.
- USE CONDUIT BUSHINGS AT EACH CONDUIT TERMINATION. WHERE NO. 4 AWG OR LARGER UNDERGROUND WIRE IS INSTALLED, USE INSULATED BUSHINGS.
- 20. USE DOUBLE LOCK NUTS AT EACH CONDUIT TERMINATION.
- WRAP ALL PRIMARY AND SECONDARY POWER TRANSFORMER CONNECTIONS WITH SUFFICIENT LAYERS OF INSULTING TAPE AND COVER WITH INSULATING VARNISH FOR FULL VALUE OF CABLE INSULATION VOLTAGE.
- 22. UNLESS OTHERWISE NOTED, ALL INDOOR SINGLE CONDUCTOR CONTROL WIRING SHALL BE NO. 12 AWG, MINUMUM.
- 23. THE FOLLOWING SHALL APPLY TO RELAY/CONTACTOR PANELS/ENCLOSURES:
  - ALL COMPONENTS SHALL BE MOUNTED IN DUST PROOF ENCLOSURE(S) WITH VERTICALLY HINGED COVERS.
  - THE ENCLOSURE(S) SHALL HAVE AMPLE SPACE FOR THE CIRCUIT COMPONENTS, TERMINAL BLOCKS AND INCOMING AND INTERNAL WIRING.
  - ALL CONTROL CONDUCTOR TERMINATIONS SHALL BE OF THE OPEN-EYE CONNECTOR/SCREW TYPE. SOLDERED CLOSED-EYE TERMINATIONS, OR TERMINATIONS WITHOUT CONNECTORS ARE NOT ACCEPTABLE.
  - WHEN THE ENCLOSURE COVER IS OPENED, ALL CIRCUIT COMPONENTS, WIRING AND TERMINALS SHALL BE EXPOSED AND ACCESSIBLE WITHOUT REMOVAL OF ANY PANELS, COVERS, ETC., EXCEPT THOSE COVERING HIGH VOLTAGE COMPONENTS.
  - ACCESS TO, OR REMOVAL OF A CIRCUIT COMPONENT OR TERMINAL BLOCK WILL NOT REQUIRE THE REMOVAL OF ANY OTHER CIRCUIT COMPONENT OR TERMINAL BLOCK.
  - EACH CIRCUIT COMPONENT SHALL BE CLEARLY IDENTIFIED INDICATING ITS CORRESPONDING NUMBER SHOWN ON THE DRAWINGS AND ITS FUNCTION.
  - A COMPLETE WIRING DIAGRAM (NOT A SCHEMATIC DIAGRAM) SHALL BE MOUNTED ON THE INSIDE OF THE COVER. THE DIAGRAM SHALL REPRESENT EACH CONDUCTOR BY A SEPARATE LINE.
  - THE DIAGRAM SHALL IDENTIFY EACH CIRCUIT COMPONENT AN NUMBERING AND COLOR OF EACH TERMINAL CONDUCTOR AND TERMINAL.
  - ALL WIRING SHALL BE NEATLY TRAINED AND LACED.
  - MINIMUM WIRE SIZE SHALL BE NO. 12 AWG.

	LAIE.	Z S S S S S S S S S S S S S S S S S S S	X.J
ũ			
2			

ILINO COUNTY, SP EE MUNI HENRY KEWANEE,

HANSON

naii, ndia

CONSTRUCT

#### FIELD LIGHTING NOTES

- UNLESS OTHERWISE NOTED, ALL UNDERGROUND FIELD POWER MULTIPLE AND SERIES CIRCUIT CONDUCTORS WHETHER DEB OR IN DUCT/CONDUIT SHALL BE FAA APPROVED L-824 TYPE. INSULATION VOLTAGE AND SIZE SHALL BE AS SPECIFIED.
- NO COMPONENTS OF PRIMARY CIRCUIT SUCH AS CABLE, CONNECTORS AND TRANSFORMERS SHALL BE BROUGHT ABOVE GROUND AT EDGE LIGHTS, SIGNS, REIL, PAPI, ETC.
- 3. THERE SHALL BE NO EXPOSED POWER/CONTROL CABLES BETWEEN THE POINT WHERE THEY LEAVE THE UNDERGROUND (DEB OR L-867 BASES) AND WHERE THEY ENTER THE EQUIPMENT (SUCH AS TAXIWAY SIGNS, PAPI, REIL, ETC.) ENCLOSURES. THESE CABLES SHALL BE ENCLOSED IN RIGID CONDUIT OR IN FLEXIBLE, WATERTIGHT CONDUIT WITH BREAKABLE COUPLING(S) AT THE GRADE OR THE HOUSING COVER, AS SHOWN IN APPLICABLE DETAILS.
- 4. THE JOINTS OF THE L-823 PRIMARY CONNECTORS SHALL BE WRAPPED WITH AT LEAST ONE LAYER OF RUBBER OR SYNTHETIC RUBBER TAPE AND ONE LAYER OF PLASTIC TAPE, ONE-HALF LAPPED, EXTENDING AT LEAST 1--1/2 INCHES ON EACH SIDE OF THE JOINT, AS SHOWN ON SHEET NO. 25.
- THE CABLE ENTRANCE INTO THE FIELD-ATTACHED L-823 CONNECTORS SHALL BE ENCLOSED BY A HEAT-SHRINKABLE TUBING WITH CONTINUOUS INTERNAL ADHESIVE, AS SHOWN ON SHEET NO. 25.
- L-823 TYPE II, TWO-CONDUCTOR SECONDARY CONNECTORS SHALL BE CLASS 'A' (FACTORY MOLDED).
- THERE SHALL BE NO SPLICES IN THE SECONDARY CABLE(S)
  WITHIN THE STEMS OF A RUNWAY/TAXIWAY EDGE/THRESHOLD
  LIGHTING FIXTURE AND THE WIREWAYS LEADING TO TAXIWAY
  SIGNS AND PAPI/REIL EQUIPMENT.
- ELECTRICAL INSULATING GREASE SHALL BE APPLIED WITHIN THE L-823, SECONDARY, TWO CONDUCTOR CONNECTORS TO PREVENT WATER ENTRANCE. THESE CONNECTORS SHALL NOT BE TAPED.
- DEB ISOLATION TRANSFORMERS SHALL BE BURIED AT A DEPTH OF TEN (10") INCHES ON A LINE CROSSING THE LIGHT AND PERPENDICULAR TO THE RUNWAY/TAXIWAY CENTERLINE AT A LOCATION TWELVE (12") INCHES FROM THE LIGHT OPPOSITE FROM THE RUNWAY/TAXIWAY.
- 10. A SLACK OF THREE (3') FEET, MINIMUM, SHALL BE PROVIDED IN THE PRIMARY CABLE AT EACH TRANSFORMER/CONNECTOR TERMINATION. AT STAKE—MOUNTED LIGHTS, THE SLACK SHALL BE LOOSELY COILED IMMEDIATELY BELOW THE ISOLATION TRANSFORMER.
- 11. DIRECTION OF PRIMARY CABLES SHALL BE IDENTIFIED BY COLOR CODING AS FOLLOWS: WHEN FACING LIGHT WITH BACK TO PAVEMENT, CABLE TO THE LEFT IS CODED RED AND CABLE TO RIGHT IS CODED BLUE. THIS APPLIES TO STAKE MOUNTED LIGHTS AND BASE MOUNTED LIGHTS WHERE THE BASE HAS ONLY ONE ENTRANCE.
- L-867 BASES SHALL BE SIZE B, 24" DEEP, CLASS I, UNLESS OTHERWISE NOTED.
- 13. BASE MOUNTED BREAKABLE COUPLINGS SHALL NOT HAVE WEEP HOLES TO THE OUTSIDE. PLUGGED UP HOLES SHALL NOT BE ACCEPTABLE. IT SHALL BE A 1/4" DIAMETER, MINIMUM, OR EQUIVALENT OPENING FOR DRAINAGE FROM THE SPACE AROUND THE SECONDARY CONNECTOR INTO THE L-867 BASE.
- 14. THE ELEVATION OF THE BREAKABLE COUPLING GROOVE SHALL NOT EXCEED 1-1/2" ABOVE THE EDGE OF THE COVER IN CASE OF BASE MOUNTED COUPLINGS, OR THE TOP OF THE STAKE IN CASE OF STAKE MOUNTED COUPLINGS.

- 15. WHERE THE BREAKABLE COUPLING IS NOT AN INTEGRAL PART OF THE LIGHT FIXTURE STEM OR MOUNTING LEG, A BEAD OF SILICON SEAL SHALL BE APPLIED COMPLETELY AROUND LIGHT STEM OR WIREWAY AT BREAKABLE COUPLING TO PROVIDE A WATERTIGHT SEAL.
- TOPS OF THE STAKES SUPPORTING LIGHT FIXTURES SHALL BE FLUSH WITH THE SURROUNDING GRADE.
- PLASTIC LIGHTING FIXTURE COMPONENTS, SUCH AS LAMP HEADS, STEMS, BREAKABLE COUPLINGS, BASE COVERS, BRACKETS, STAKES, SHALL NOT BE ACCEPTABLE.
- 18. THE TOLERANCE FOR THE HEIGHT OF RUNWAY/TAXIWAY EDGE LIGHTS SHALL BE: ONE (1) INCH. IN CASE OF STAKE MOUNTED LIGHTS, THE SPECIFIED LIGHTING FIXTURE HEIGHT SHALL BE MEASURED BETWEEN THE TOP OF THE STAKE AND THE TOP OF THE LENS. IN CASE OF BASE MOUNTED LIGHTS, THE SPECIFIED LIGHTING FIXTURE HEIGHT SHALL BE MEASURED BETWEEN THE TOP OF THE BASE FLANGE AND THE TOP OF THE LENS, THUS INCLUDING THE BASE COVER, THE FRANGIBLE COUPLING, THE STEM, THE LAMP HOUSING AND THE LENS.
- 19. THE TOLERANCE FOR THE LATERAL SPACING (LIGHT LANE TO RUNWAY/TAXIWAY CENTERLINE) OF RUNWAY/TAXIWAY EDGE LIGHTS SHALL BE ONE (1) INCH. THIS ALSO APPLIES AT INTERSECTIONS TO LATERAL SPACING BETWEEN LIGHTS OF A RUNWAY/TAXIWAY AND THE INTERSECTING RUNWAY/TAXIWAY.
- 20. ENTRANCES INTO L-867 BASES SHALL BE SEALED WITH HEAT SHRINK AS SHOWN IN DETAIL "B" ON SHEET NO. 25.
- 21. GALVANIZED/PAINTED EQUIPMENT/COMPONENT SURFACES SHALL
  NOT BE DAMAGED BY DRILLING, FILING, ETC. DRAIN HOLES IN
  METAL TRANSFORMER HOUSINGS SHALL BE MADE BEFORE
  GALVANIZING.
- 22. EDGE LIGHT NUMBERING TAGS SHALL BE FACING THE PAVEMENT.
- 23. CABLE/SPLICE/DUCT MARKERS SHALL BE PRECAST CONCRETE OF THE SIZE SHOWN. LETTERS/NUMBERS/ARROWS FOR THE LEGEND TO BE IMPRESSED INTO THE TOPS OF THE MARKERS SHALL BE PRE— ASSEMBLED AND SECURED IN THE MOLD BEFORE THE CONCRETE IS POURED. LEGEND INSCRIBED BY HAND IN WET CONCRETE SHALL NOT BE ACCEPTABLE.
- 24. ALL UNDERGROUND CABLE RUNS SHALL BE IDENTIFIED BY CABLE MARKERS AT 200 FEET MAXIMUM SPACING, WITH AN ADDITIONAL MARKER AT EACH CHANGE OF DIRECTION OF THE CABLE RUN. CABLE MARKERS SHALL BE INSTALLED IMMEDIATELY ABOVE THE CABLES.
- THERE SHALL BE NO SPLICES BETWEEN THE ISOLATION TRANSFORMERS. L—823 CONNECTORS ARE ALLOWED AT TRANSFORMER CONNECTIONS ONLY, UNLESS OTHERWISE SHOWN.
- APPLY AN OXIDE INHIBITING, ANTI-SEIZING COMPOUND TO ALL SCREWS, NUTS AND BREAKAGE COUPLING THREADS.
- LOCATIONS OF ENDS OF ALL UNDERGROUND DUCTS SHALL BE IDENTIFIED BY DUCT MARKERS.
- 28. WHERE A PARALLEL, CONSTANT VOLTAGE PAPI SYSTEM IS PROVIDED, THE "T" SPLICES SHALL BE OF THE CAST TYPE.
- 29. CONCRETE USED FOR SLABS, FOOTINGS, BACKFILL AROUND TRANSFORMER HOUSINGS, MARKINGS, ETC. SHALL BE 3000 PSI, AIR_FATRAINED
- 30. ALL POWER AND CONTROL CABLES IN MAN/HAND HOLES SHALL BE TAGGED. USE EMBOSSED COPPER STRIPS TO BE ATTACHED AT BOTH ENDS TO THE CABLE BY THE USE OF PLASTIC STRAPS. MINIMUM OF TWO TAGS SHALL BE PROVIDED ON EACH CABLE IN A MAN/HAND HOLE—ONE AT THE CABLE ENTRANCE AND ONE AT THE

## GROUNDING NOTES

- ALL GROUND CONNECTIONS TO GROUND RODS, BUSSES, PANELS, ETC.
  SHALL BE MADE WITH PRESSURE TYPE SOLDERLESS LUGS AND
  GROUND CLAMPS SOLDERED OR BOLT AND WASHER TYPE
  CONNECTIONS ARE NOT ACCEPTABLE. CLEAN ALL METAL SURFACES
  BEFORE MAKING GROUND CONNECTIONS. CONNECTIONS TO GROUND
  RODS SHALL BE EXOTHERMIC WELD WHERE SPECIFIED HEREIN.
- TOP OF GROUND RODS SHALL BE TEN (10) INCHES BELOW GRADE, UNLESS SPECIFIED OTHERWISE HEREIN, FOR RESPECTIVE APPLICATIONS.
- THE RESISTANCE TO GROUND OF THE VAULT GROUNDING SYSTEM WITH THE COMMERCIAL POWER LINE NEUTRAL DISCONNECTED SHALL NOT EXCEED 10 OHMS.

**KE008** 

8	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\					
	REVISION					
	DATE					

ILLINOIS

NICIPAL AIRPORT IY COUNTY, ILLINOIS

KEWANEE MUNICIPA KEWANEE, HENRY COL

N/A 04/28/06 RAW. 09/02/05 BAK. 09/02/05

HANSON

CONSTRUCT VAULT

ELECTRICAL NOTES

SHEET 2