


ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE)

SERVICE INSTALLATION POLE MOUNT (SHOWN)

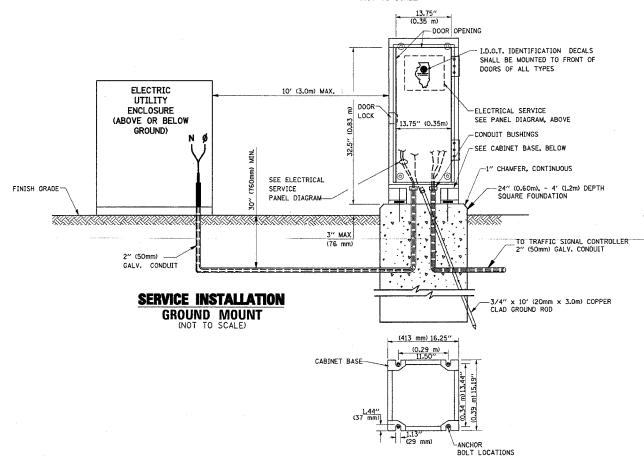

CABINET - BASE BOLT PATTERN

NOTES:

HANDHOLE COVER

DETAIL "A"

DETAIL "B"

RECESSED COVER

DIRECT BURIAL

HEAVY DUTY COPPER COMPRESSION GROUNDING TERMINAL. (TYPICAL)

- GROUNDING CABLE (PAID FOR SEPARATELY)

GROUND CABLES TO CONTROLLER
DOUBLE HANDHOLE

-TO POLE OR

SEE DETAIL "B"

HANDHOLE COVER

CAST CORNER FRAME WEB -UL LISTED GROUND COMPRESSION CONNECTOR

COMPRESSION CONNECTOR --WITH STAINLESS STEEL NUT

£1/C #6

(GREEN)

HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

ANTI-CORROSION COMPOUND -

SHALL BE APPLIED ON ALL BOLT/ CONNECTION ASSEMBLIES.

-STAINLESS STEEL NUT AND 2 STAINLESS

SEE DETAIL "A"

(2) 1/2" \times 1 1/4" STAINLESS STEEL BOLT WITH SPLIT LOCK WASHER AND NYLON INSERT LOCKOUT WELDED TO $\overline{}$

EXISTING HANDHOLE FRAME AND COVER

EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

FRAME AND TO COVER. (TYPICAL)

CABLE HOOKS

REQUIRED, ALI


GROUNDING SYSTEM

RTE. SECTION COUNTY 375 3035-Z-Y-1-RS-1 COOK FED. ROAD DIST, NO. _ ILLINOIS FED. AID PROJECT 62941

1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR TYPE XLP, NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN RACEWAYS. THE GROUNDING CABLE SHALL BE INSTALLED IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED. ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE (HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.). GROUND ROD SHALL BE 3/4" DIA. x 10'-0" (20mm x 3.0m) LONG, COPPER CLAD, ONE GROUND ROD SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS, CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS, THE RESIDENT ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC. ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT (847) 705-4139.

2. THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.

- 3. ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS IN THE CONTROLLER CABINET.
- 4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.




HEAVY-DUTY COMPRESSION TERMINAL (BURNDY TYPE YGHA OR APPROVED EQUAL)



3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL.)

• ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED.
• GROUND CABLE SHALL BE LOOPED OVER HOOKS IN THE HANDHOLES 6.5' (2.0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13' (4.0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES. 5' (1.4m) OF SLACK SHALL BE PROVIDED BETWEEN FRAME AND COVER.

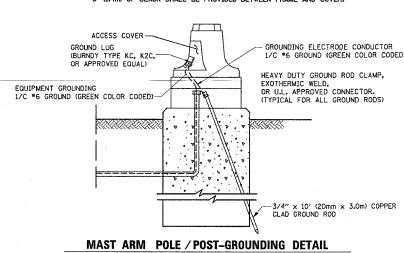



REVISION DATE: 01/01/02