


- NOTES:**
- EXISTING CONTROLLER AND CABINET TO BE REPLACED.
  - REMOVED EQUIPMENT SHALL REMAIN THE PROPERTY OF DUPAGE COUNTY. THE CONTRACTOR SHALL RETURN THE EXISTING CONTROLLER AND CABINET COMPLETE TO THE DUPAGE ELECTRICAL MAINTENANCE FACILITIES.

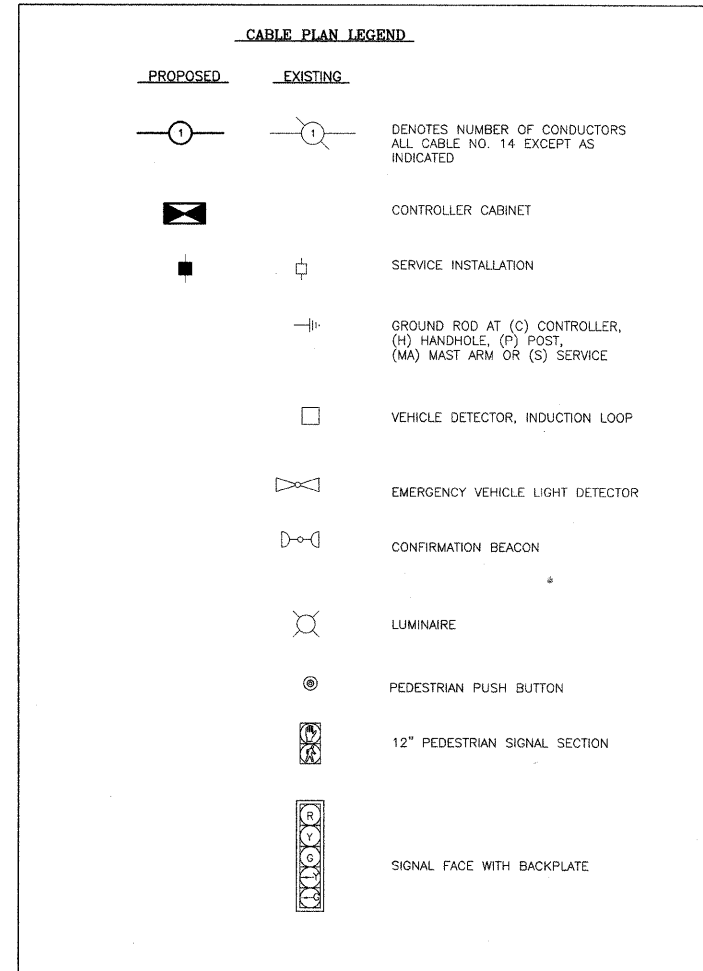

DU PAGE COUNTY D.O.T TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL WATTAGE
TYPE	NO. LAMPS	WATTAGE		OPERATION (%)	
		INCAND.	LED		
RED BALL	10	135	10	0.60	60
YELLOW BALL	10	135	22	0.93	66
GREEN BALL	10	135	12	0.37	44.4
RED ARROW	0	135	5	0.85	0
YELLOW ARROW	4	135	10	0.02	0.8
GREEN ARROW	4	135	5	0.13	2.6
PED - WALK	8	90	5	0.05	2
PED - DON'T WALK	8	90	6	0.95	45.6
CONTROLLER	1	100		1.00	100
LUMINAIRE	2	310		0.50	620
TOTAL=					882

FOUNDATION/DEPTH	FT. (m)	CABLE SLACK	FT. (m)	VERTICAL	FT. (m)
TYPE A - POST	4 (1.2)	HANDHOLE	6.5 (2.0)	ALL FOUNDATIONS	3.5 (1.0)
D - CONTROLLER	4 (1.2)	DOUBLE HANDHOLE	13 (4.0)	MAST ARM (L) POLE	20+L-2=
E - M. ARM POLE		SIGNAL POST	2 (1.0)		(6m+L-0.6m)=
	24" (600 mm)	CONTROLLER CAB.	1 (0.5)	BRACKET MOUNTED	13 (4.0)
	30" (750 mm)	FIBER OPTIC	13 (4.0)	PED. BUTTON	4 (1.2)
		ELECTRIC SERVICE	1 (0.5)	ELECTRIC SERVICE	13.5 (4.1)
		GROUND CABLE	1 (0.5)	SERVICE TO GROUND	13.5 (4.1)
				POST MOUNTED	6 (1.8)

REVISIONS	
NAME	DATE

DUPAGE COUNTY DIVISION OF TRANSPORTATION  
**NAPERVILLE ROAD/  
 DANADA DRIVE**  
 EXISTING AND PROPOSED  
**CABLE PLAN AND PHASING DIAGRAM**  
 SCALE: 1"=20'  
 DATE: 8/21/08  
 DRAWN BY: TH  
 DESIGNED BY: TH  
 CHECKED BY: DAZ