
_	ROUTE NO.	SECTION	COL	COUNTY		SHEET NO.
	T.R. 159	01-11126 -00-BR	IROQ	UOIS	23	23
	DOUGLAS PO	AD DIST	TILINOIS	D)	ROS-075(128)	

CONTRACT NO. 87300

DESCRIPTION OF INTENDED SEQUENCE OF MAJOR CONSTRUCTION ACTIVITIES WHICH WILL DISTURB EARTH AND LEAD TO POSSIBLE EROSION FOR MAJOR PORTIONS OF THE CONSTRUCTION SITE:

1. PLACEMENT OF PERIMETER EROSION CONTROL FENCE PRIOR TO THE COMMENCEMENT OF ANY ROAD OR BRIDGE WORK. SEE STD. 280001.

- 2. REMOVAL OF EXISTING STRUCTURE.
- 3. CONSTRUCTION OF THE REPLACEMENT STRUCTURE.
- 4. PLACEMENT OF ROADWAY EMBANKMENT TO RAISE THE ROADWAY TO THE PROPOSED GRADE.
- 5. DRAINAGE STRUCTURES, INCLUDING DITCHES, WILL BE INSTALLED BEFORE AND/OR DURING THE COMPLETION OF THE EMBANKMENT.
- 6. PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROL.
- 7. PLACEMENT OF PERMANENT EROSION CONTROL.
- 8. REMOVAL AND PROPER CLEAN UP OF TEMPORARY EROSION CONTROL.
- 9. FINAL GRADING, PLACING AGGREGATE AND OTHER MISCELLANEOUS ITEMS.

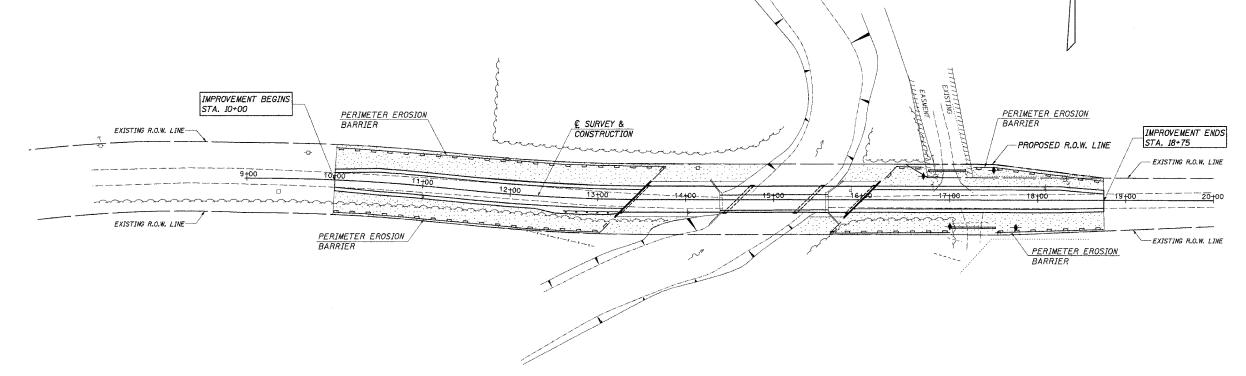

TEMPORARY EROSION CONTROL:

PERIMETER EROSION BARRIER

PERMANENT EROSION CONTROL:

SEEDING CLASS 2, FERTILIZERS, & MULCH, METHOD 2

TEMPORARY DITCH CHECKS

LT. STA. 16+70 RT. STA. 17+00

LT. STA. 17+50

RT. STA. 17+75 = 1 TOTAL = 4 EACH

BILL OF MATERIAL

ITEM	UNIT	QUANTITY
TEMPORARY EROSION CONTROL SEEDING	POUND	100
TEMPORARY DITCH CHECKS	EACH	4
PERIMETER EROSION BARRIER	FOOT	1330

THE ABOVE QUANTITIES ARE ESTIMATES ONLY. ACTUAL QUANTITIES FOR EROSION CONTROL WILL BE DETERMINED BY THE ENGINEER IN THE FIELD AND THERE WILL BE NO ADJUSTMENT IN ANY PRICE DUE TO A CHANGE IN PLAN QUANTITY.

EROSION CONTROL PLAN

SECTION 01-11126-00-BR DOUGLAS ROAD DISTRICT IROQUOIS COUNTY STATION 14+69.94



4440 ASH GROVE
PRINGFIELD, IL. 82711
(217) 793-8800

WWw.febr-grapham.com

FEHR-GRAHAM & ASSOCIATES, LLC

ENGINEERING AND SCIENCE CONSULTANTS

MORROW TO BE AND SCIENCE CONSULTANTS

MOR

JOB NO.: 46815 FILE: EROSION.DGN