

## (FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW) OPTION 1

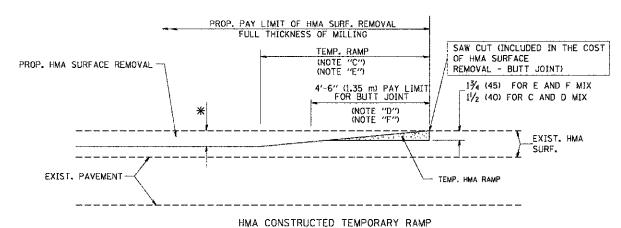

(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

## OPTION 2

#### TYPICAL TEMPORARY RAMP

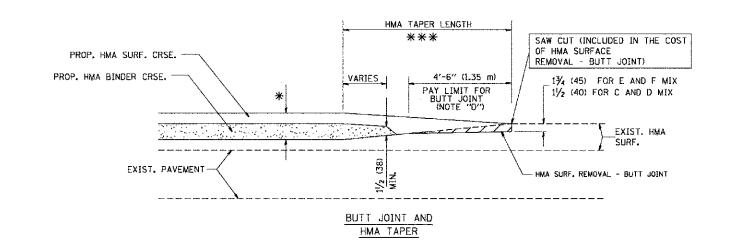



# TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

COPYRIGHT © 2012 ENGINEERING ENTERPRISES FILE NAME = USER NAME = gaglianobt DESIGNED - M. DE YONG - R. SHAH 10-25-94 REVISED ¥:\diatatd\22x34\bd32.dgn DRAWN REVISED A. ABBAS 03-21-97 CHECKED M. GOMEZ 04-06-01 PLOT SCALE = 50.0000 '/ IN. REVISED PLOT DATE = 1/4/2008 DATE 06-13-90 REVISED - R. 8080 01-01-07

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

SECTION **BUTT JOINT AND** 3553 10-00031-00-RS HMA TAPER DETAILS BD400-05 BD32 CONTRACT NO. 63758 SHEET NO. 1 OF 1 SHEETS STA. TO STA. FED. ROAD DIST. NO. 1 | ILLINOIS FED. AID PROJECT - M-9003(866)

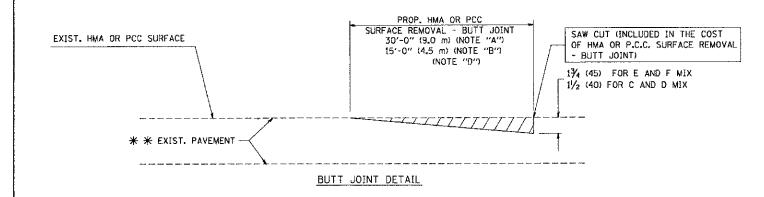

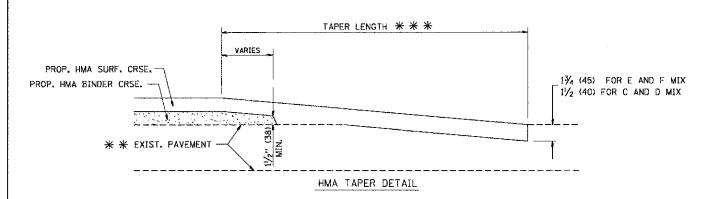

## TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

\* \* PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

#### NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP, RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP, RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

### BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER)
FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

SCALE: NONE

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

TOTAL SHEET SHEETS NO. COUNTY DUPAGE 29 28