

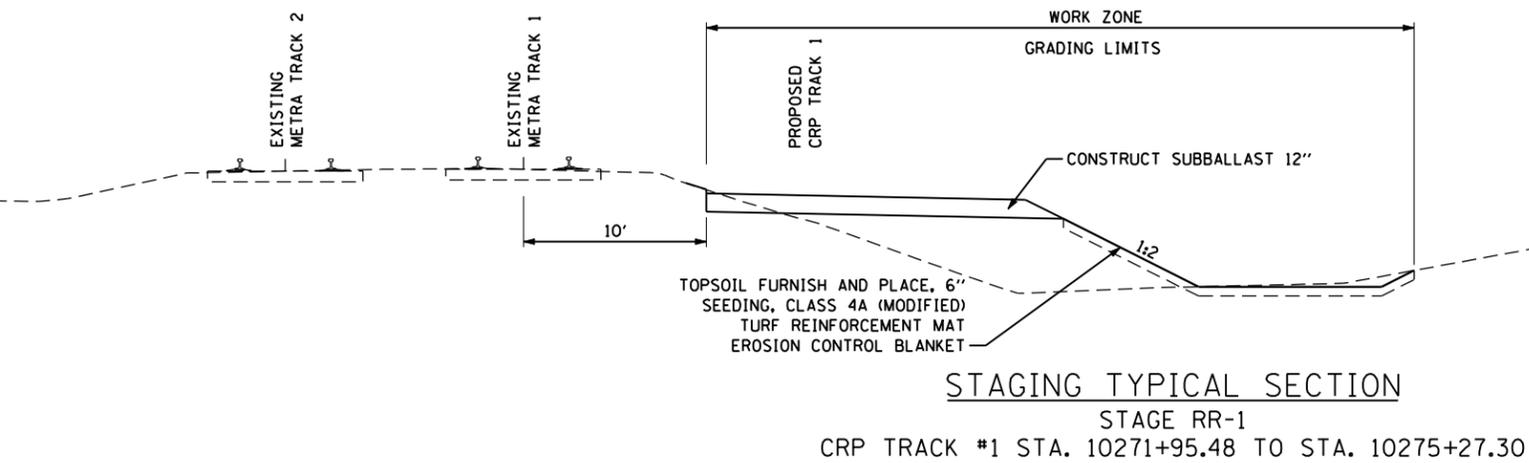
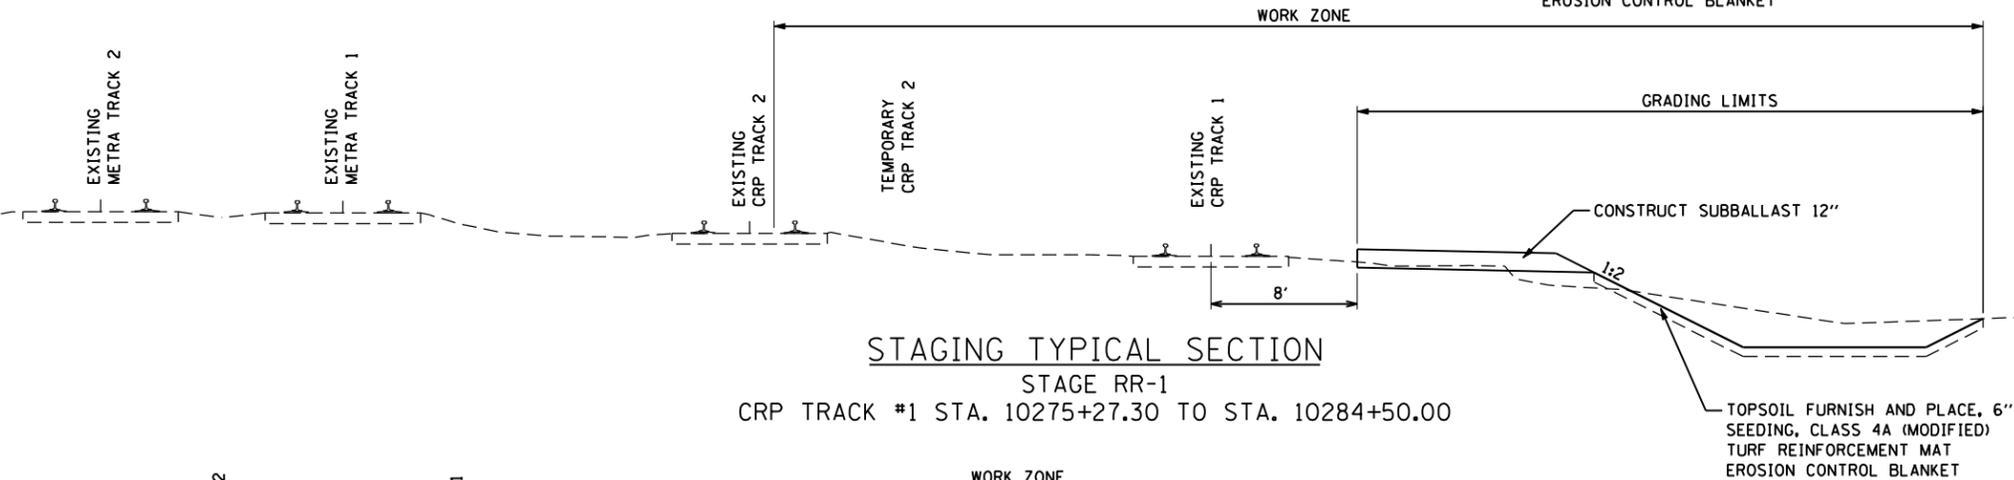


STAGE RR-1 NOTES:

- 1) CONTRACTOR TO COMPLETE GRADING IN THE LOCATIONS SHOWN ON THE PLANS INCLUDING THE CONSTRUCTION OF A TEMPORARY SOIL RETENTION SYSTEM.
- 2) METRA TO CONSTRUCT CANTILEVER SIGNAL, REMOVE CANTILEVER SIGNAL, CONSTRUCT *20 LHPO CROSSOVER, REMOVE EXISTING *20 CROSSOVER, CONSTRUCT 1 *15 RH CROSSOVER, REMOVE 1 *15 CROSSOVER, CONSTRUCT 2 *15 TURNOUTS, CONSTRUCT 1 *11 TURNOUT, REMOVE THREE TURNOUTS, RESURFACE RE-ALIGN LEAD TRACKS.
- 3) CPR TO CONSTRUCT PROPOSED TRACKS 1 AND 2 TO THE LIMITS SHOWN ON THE PLANS.
- 4) CONTRACTOR TO CONSTRUCT STABILIZED CONSTRUCTION ENTRANCE AS SHOWN ON THE PLANS.
- 5) CPR TO INSTALL TEMPORARY CROSSING AT TE STABILIZED CONSTRUCTION ENTRANCE.
- 6) DURING STAGE RR-1 TRAINS WILL OPERATE ON EXISTING CPR TRACKS 1 AND 2.
- 7) CONTRACTOR TO CONSTRUCT RETAINING WALLS RW-1, RW-2, RW-3, AND RW-4.
- 8) CONTRACTOR TO CONSTRUCT BRIDGE.
- 9) CONTRACTOR TO CONSTRUCT TEMPORARY CULVERT AND EAST PORTION OF PROPOSED CULVERT.
- 10) CONTRACTOR TO MAINTAIN POSITIVE DRAINAGE AT ALL TIMES DURING STAGED CONSTRUCTION.

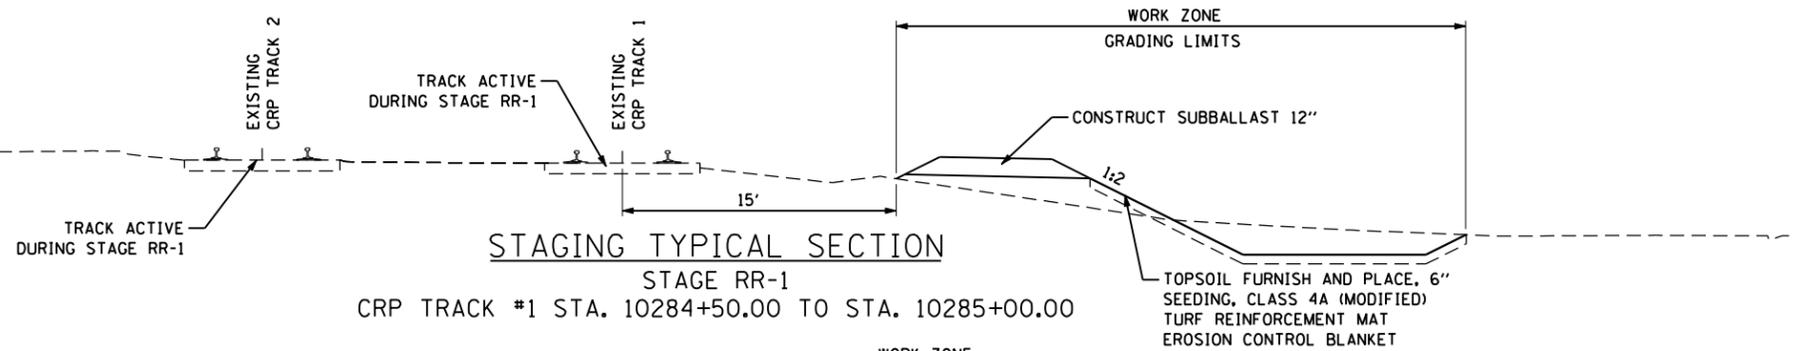

FILE NAME = ...\\D160W01-SHT-STAGING01-TYPICAL-RR01.DGN

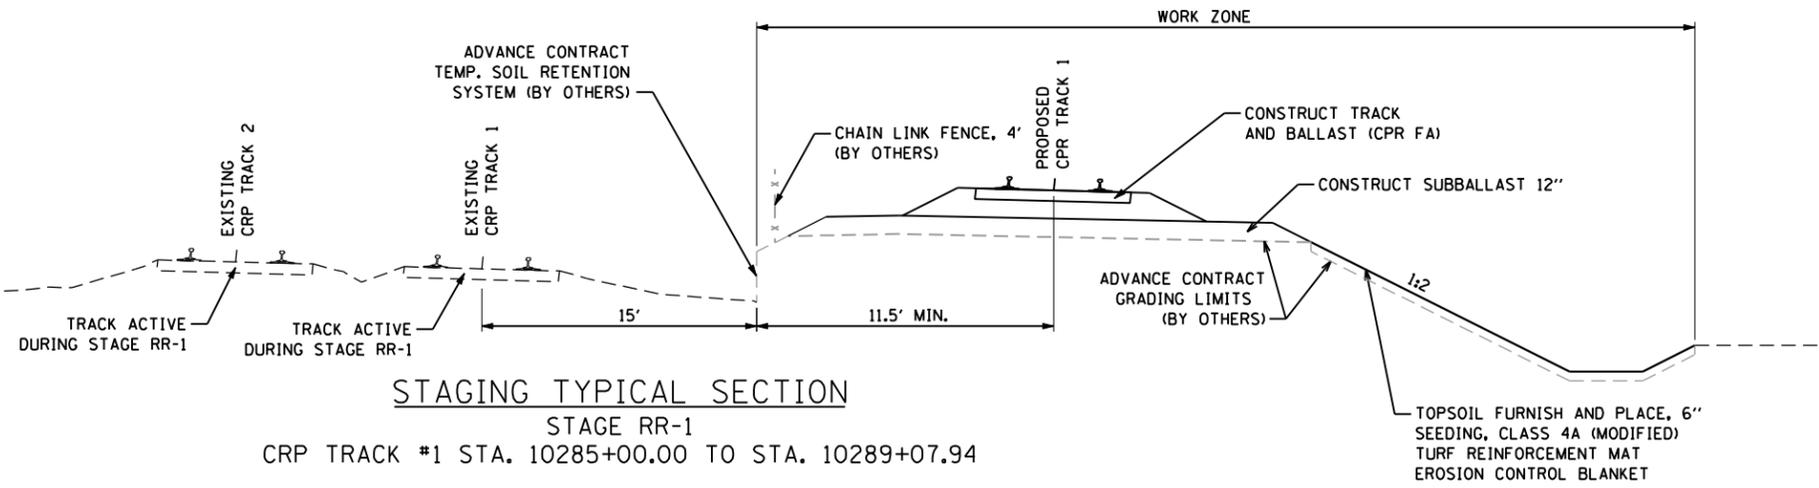

USER NAME = natterm	DESIGNED - NMR	REVISED -
	DRAWN - NMR	REVISED -
PLOT SCALE = N.T.S. / IN.	CHECKED - MPH	REVISED -
PLOT DATE = 11/22/2012	DATE - 11-02-2012	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

CANADIAN PACIFIC RAILWAY STAGING TYPICAL SECTION (STAGE RR-1)	
SCALE: N.T.S.	SHEET NO. 3 OF 25 SHEETS
STA. TO STA.	

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1321	32VB		388	325
CONTRACT NO. 60W01			ILLINOIS FED. AID PROJECT	