

MAINTENANCE OF TRAFFIC STAGE 2

SEQUENCE OF CONSTRUCTION

1. REMOVE EXISTING SHOULDERS ALONG NB IL3.
2. CONSTRUCT ROADWAY ALONG NB IL ROUTE 3 UP TO 1-1/2" FROM FINAL SURFACE.
3. REMOVE EXISTING SHOULDERS ALONG S. MARKET STREET.
4. PLACE BINDER ALONG S. MARKET STREET UP TO 1-1/2" FROM FINAL SURFACE.
5. CONSTRUCT ISLAND ALONG NB IL 3.

TRAFFIC PLACEMENT


1. MAINTAIN EXISTING TRAFFIC ALONG IL ROUTE 3.
2. SHIFT TRAFFIC ALONG S. MARKET ST., ALTERNATING FROM COMPLETED LEFT, UNTIL FINAL BINDER LIFT IS PLACED.

TRAFFIC CONTROL STANDARDS

- 701502
- 701306 (S. MARKET PAVING)
- 701602
- 701701

LEGEND

-  WORK THIS STAGE
-  DIRECTION OF TRAFFIC FLOW
-  CONSTRUCTION SIGN
-  TYPE III BARRICADE

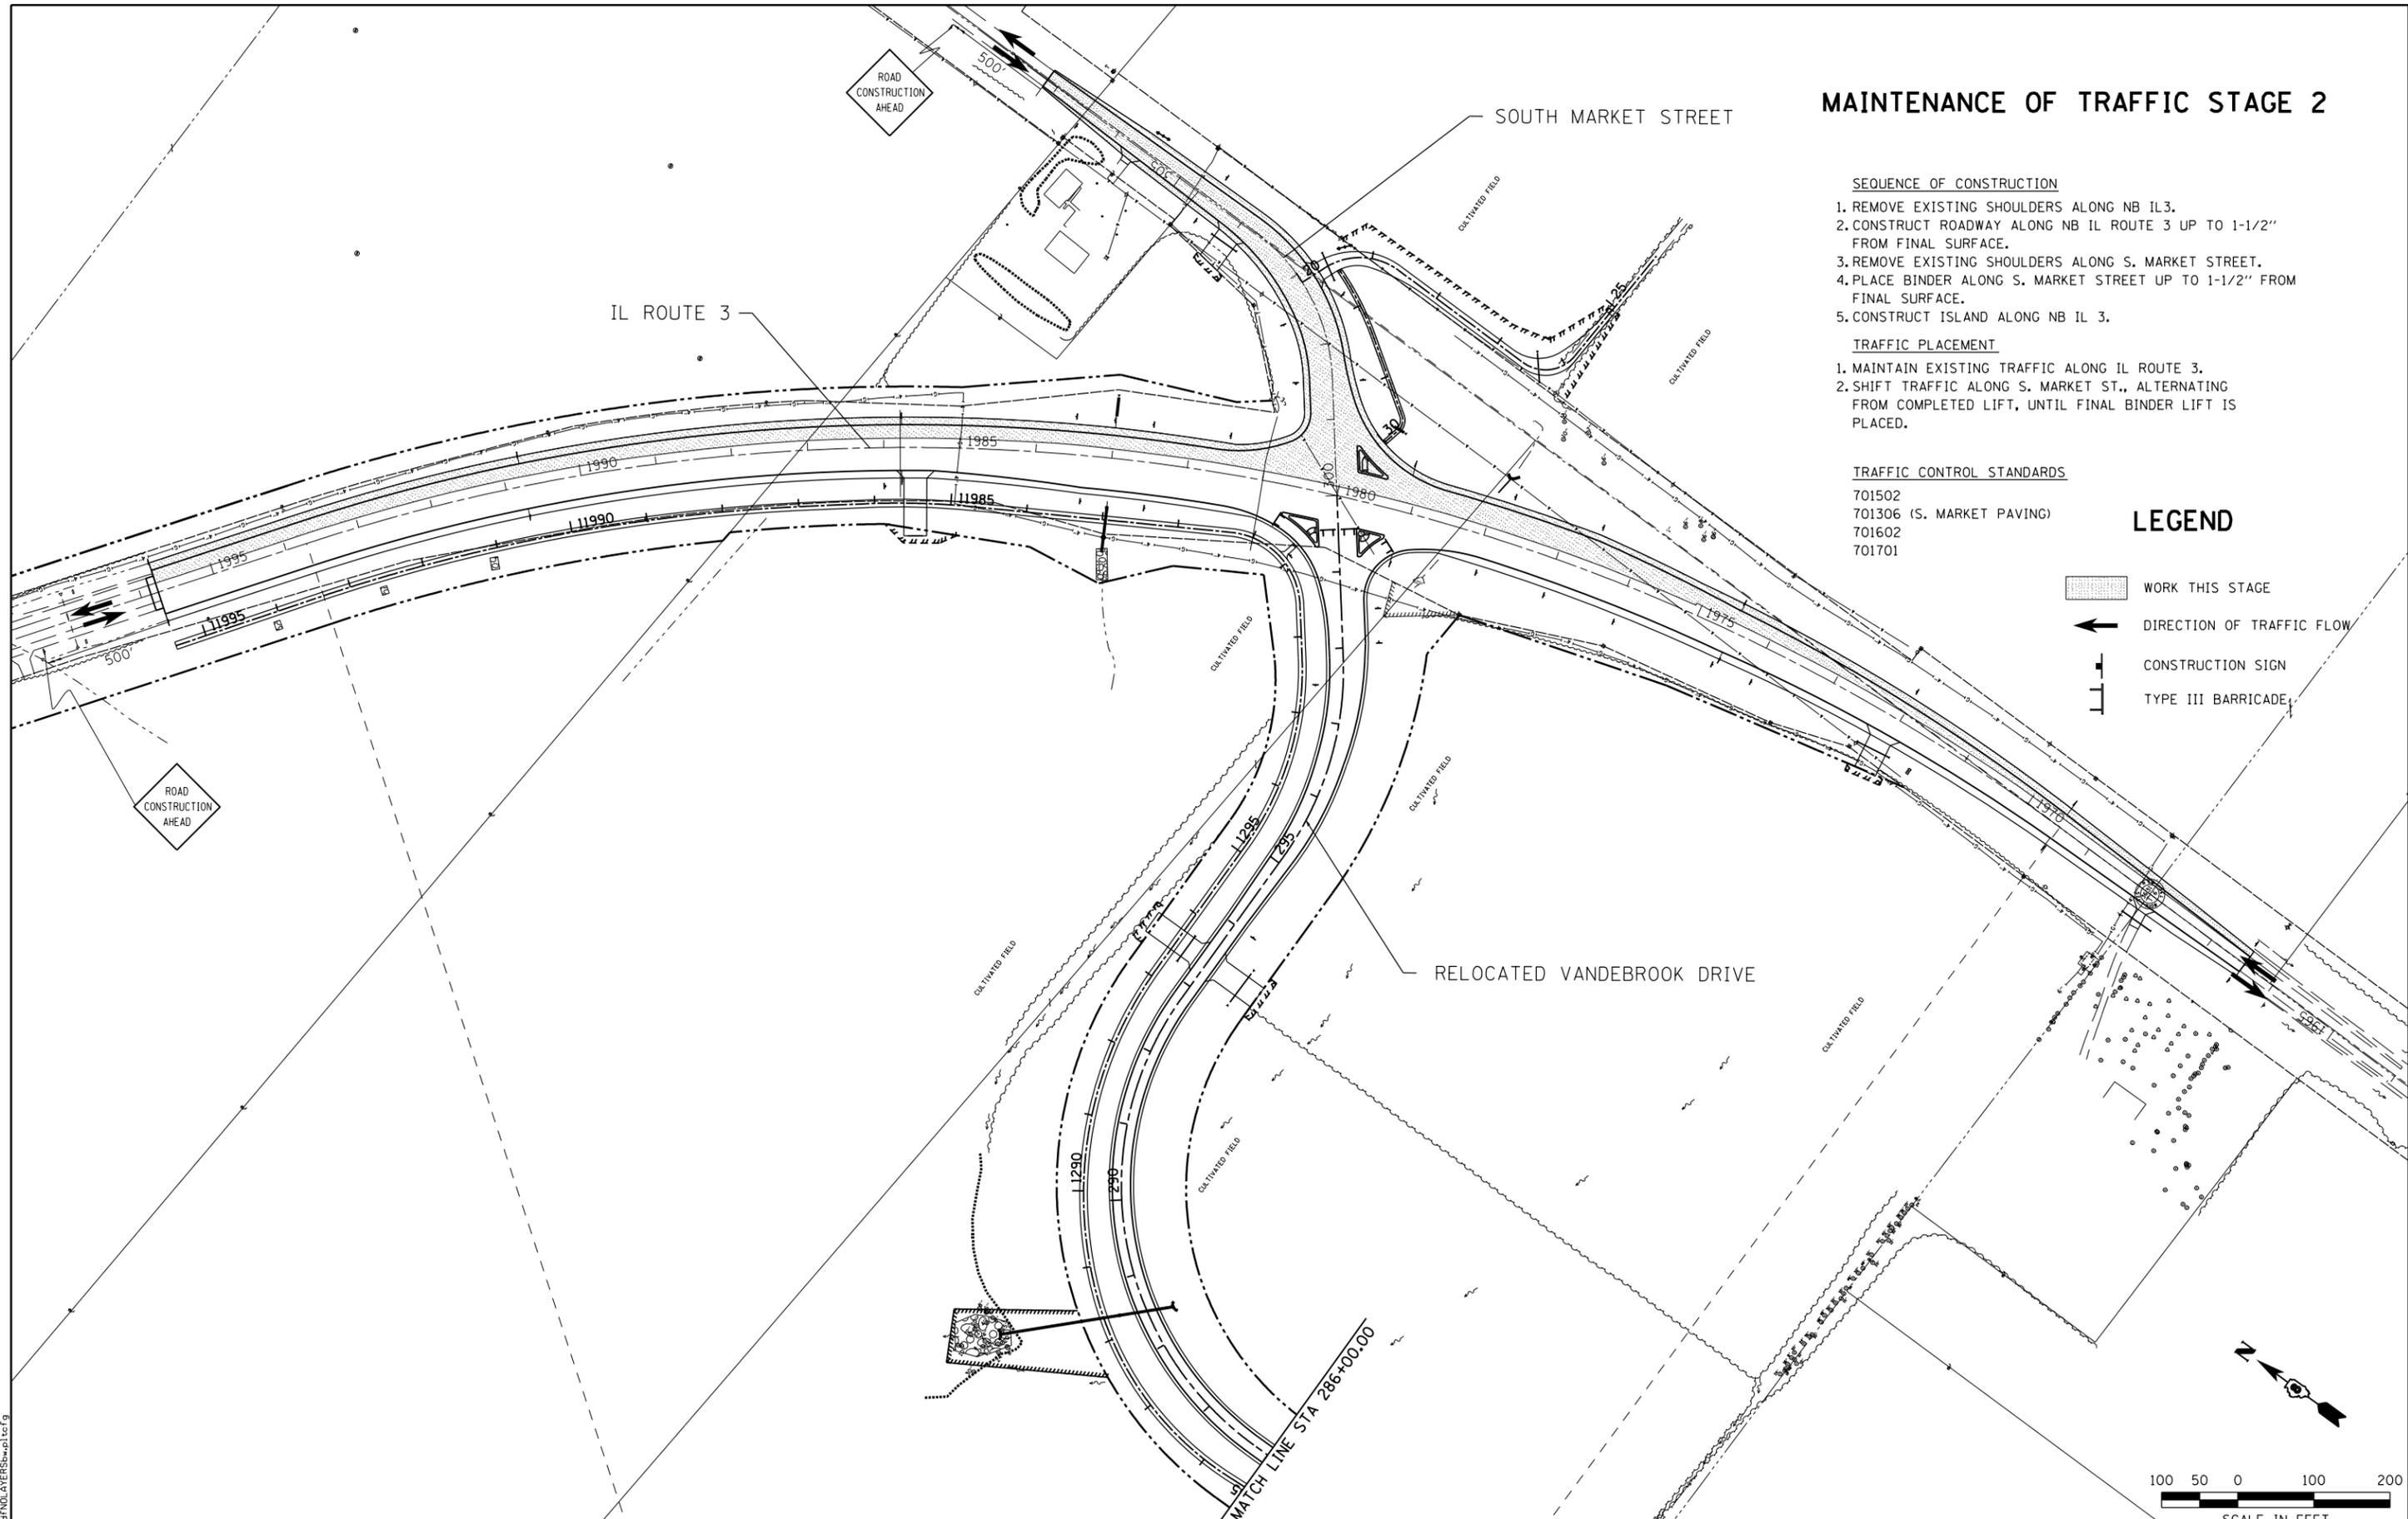

LAST SAVED = 10/3/2012
 PEN TABLE = 10/3/2012
 PLOT DRIVER = pdfplotlayers=plctcf9

FILE NAME =	USER NAME = jepettibone	DESIGNED -	REVISED -
I:\1001100\Phase II - 76FS\Cad\T\Plans\34_D876F51-sht-staging-04.dgn		DRAWN -	REVISED -
PLOT SCALE = 200.0000' / in.		CHECKED -	REVISED -
PLOT DATE = 10/4/2012 5:10:59 PM		DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


HORNER & SHIFRIN, INC.
ENGINEERS

SUGGESTED STAGES OF CONSTRUCTION
AND TRAFFIC CONTROL
 STAGE 2

SCALE: 1" = 100' SHEET NO. 4 OF 7 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
9324	68-R-1	MONROE	192	66
CONTRACT NO. 76F51			ILLINOIS FED. AID PROJECT	