
CONTRACT NO. 91285



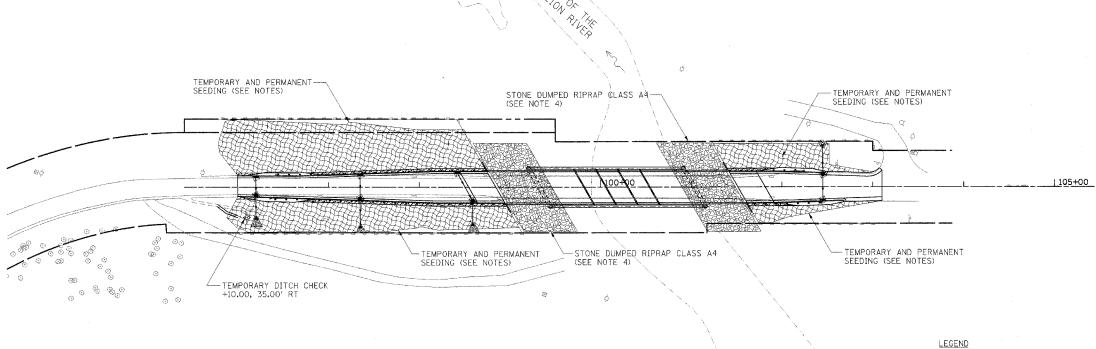

## INTENDED SEQUENCE OF EROSION CONTROL

- PLACEMENT OF PERIMETER EROSION BARRIER PRIOR TO COMMENCEMENT OF ANY WORK.
- 2. REMOVAL OF THE EXISTING STRUCTURE AND ROADWAY.
- 3. CONSTRUCTION OF THE PROPOSED STRUCTURE.
- 4. CONSTRUCTION OF THE PROPOSED ROADWAY EMBANKEMENT.
- 5. CONSTRUCTION OF THE PROPOSED ROADWAY.
- 6. PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROL MEASURES.
- 7. FINAL GRADING OF THE PROPOSED EMBANKMENT.
- 8. REMOVAL AND PROPER CLEANUP OF TEMPORARY EROSION CONTROL MEASURES.
- 9. PLACEMENT OF THE PERMANENT EROSION CONTROL MEASURES.

- 1. TEMPORARY SEEDING SHALL BE IN PLACE AS SOON AS POSSIBLE ON ALL DISTURBED GROUND.
- PERMANENT SEEDING SHALL BE IN PLACE AFTER TOP SOIL HAS BEEN SPREAD OVER THE EMBANKMENT. REFER TO SHEET 13 FOR FURTHER PERMANENT SEEDING INFORMATION.
- 3. THE RIPRAP SHOWN ON THIS SHEET IS THE SAME AS THE RIPRAP SHOWN ON SHEET 14.
- 4. REFER TO THE STRUCTURAL PLANS FOR MORE INFORMATION ON THE STONE DUMPED RIPRAP, CLASS A4.
- 5. ADDITIONAL EROSION CONTROL MEASURES MAY BE REQUIRED AT THE DISCREATION OF THE ENGINEER.

EROSION CONTROL BLANKET

RIPRAP, CLASS A3 (SEE NOTE 3)

STONE DUMPED RIPRAP, CLASS A4

PERIMETER EROSION BARRIER

REVISIONS NAME	DATE	CITY OF DANVILLE, ILLINOIS HUNGRY HOLLOW ROAD BRIDGE	
INAME	DATE		
		EROSION	CONTROL PLAN
		SCALE: 1"=50"	DRAWN BY MRK
		DATE: 12/06/05	CHECKED BY JRH
**************************************		TENG	TENG & ASSUCIATES, INC. ENGINEERSPARCHTECTSPLANNERS 305 N. MICHIGAN AVE. CHICAGO, IL 60601 TELEPHONE: BLEEL-6060