
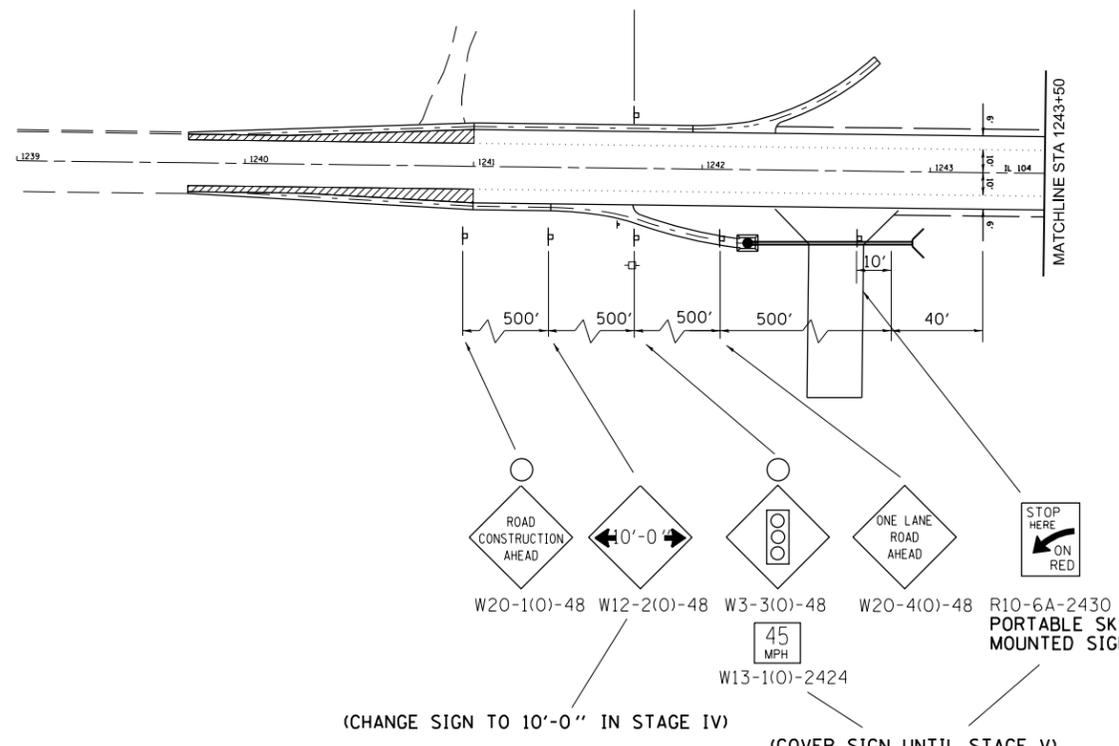


STAGE IV TRAFFIC CONTROL

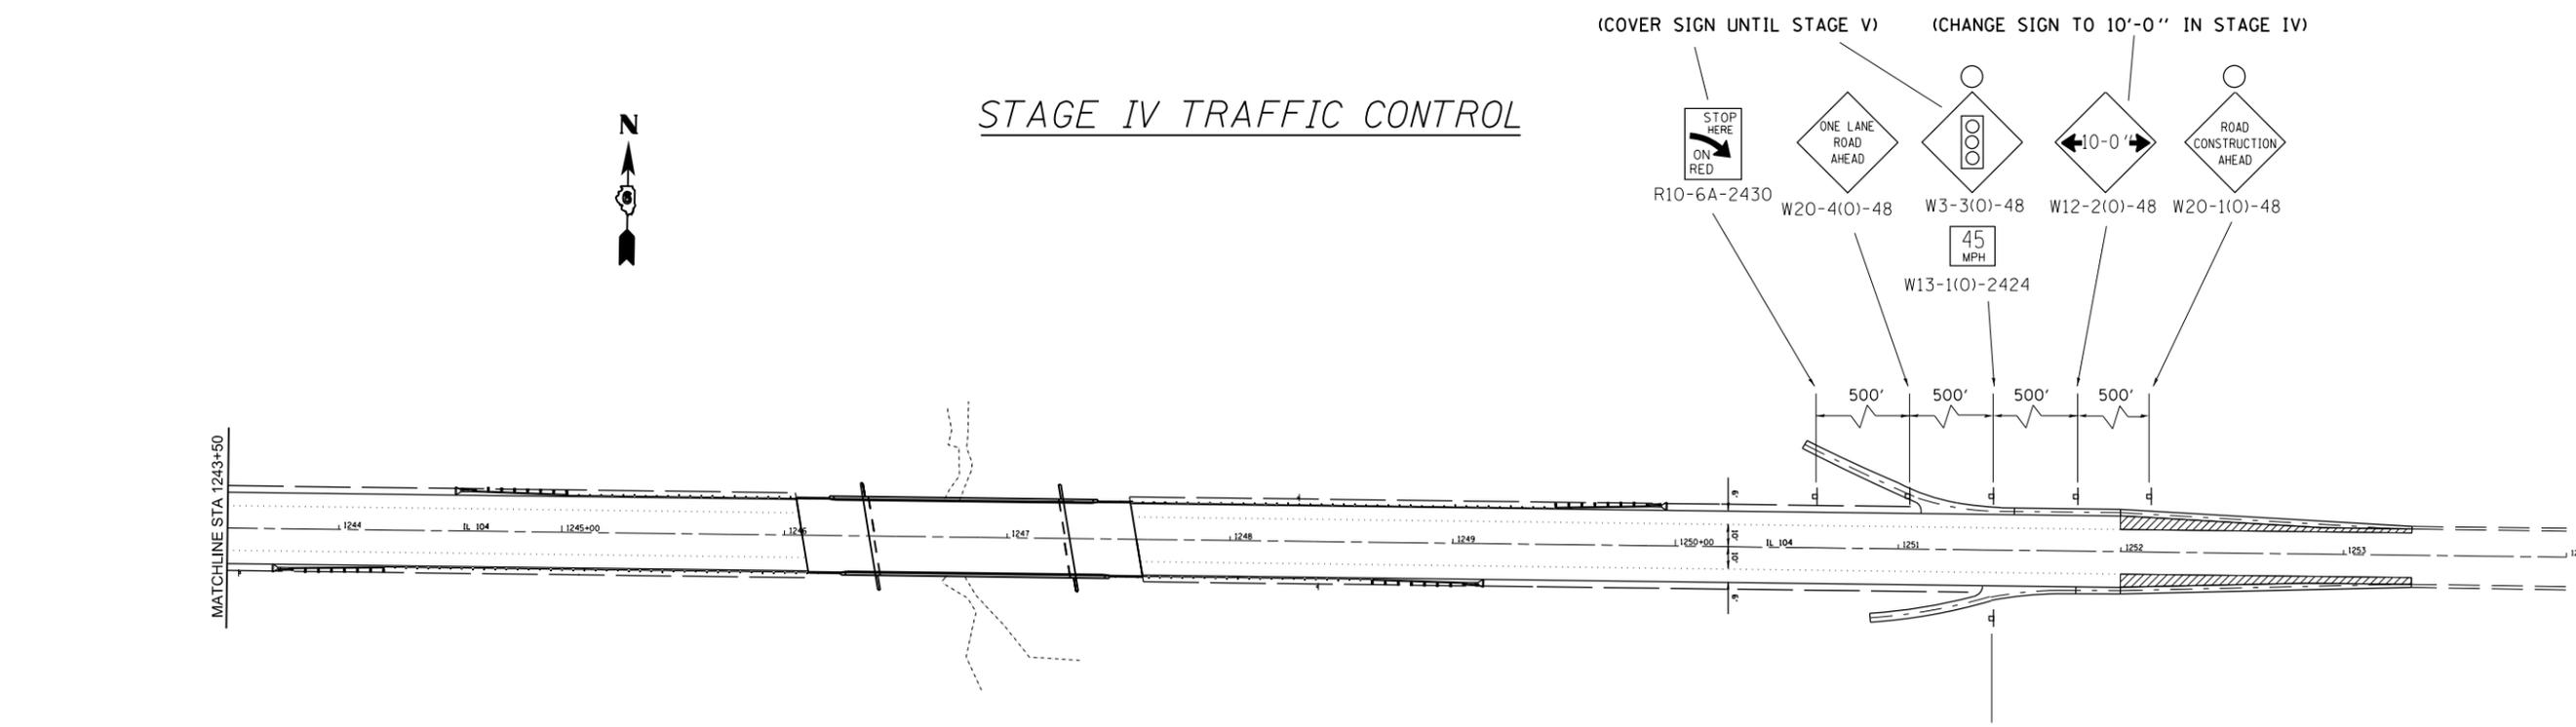

Sequence of Stage IV Construction

1. Remove Temporary Concrete Barrier, Temporary traffic bridge traffic signals, Impact attenuators, and other associated TC&P 701321 items.
2. Remove conflicting pavement markings and open roadway to two-way traffic.
3. Remove the remaining existing Gutter and Pavement and pour the proposed gutter transitions.
4. Utilize existing traffic control signage and Standard 701326

NOTES

1. "Excavation for construction on both sides of the pavement at any one location will not be permitted" as per specification 701.08 of the "Standard Specifications for Road and Bridge Construction" January 1, 2007
2. Concrete may be used for Base Cse Widening, 10" LT & RT, tie bars shall be included the cost. Tie bars shall be place on 24" center as per specification 442.06 of the "Standard Specifications for Road and Bridge Construction" January 1, 2007.

LEGEND

- PAVEMENT REMOVAL
- IMPACT ATTENUATOR, NARROW
- TEMPORARY BARRIER WALL
- EXISTING STRUCTURE TO BE REMOVED
- HOT-MIX ASPHALT BASE CSE WID, 10"
- DOUBLE VERTICAL PANEL
- SIGN
- N.T.S. - NOT TO SCALE
- INDUCTION LOOP DETECTOR
- TEMPORARY BRIDGE TRAFFIC SIGNALS
- DRUM WITH STEADY BURNING LIGHT
- 24" STOP BAR
- TYPE III BARRICADES
- TYPE C BIDIRECTIONAL REFLECTOR
- STEADY BURNING LIGHTS AND DOUBLE VERTICAL PANELS

FILE NAME =	USER NAME = laughlinr1	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	IL 104 OVER GRINDSTONE CREEK STAGE IV CONSTRUCTION			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
et:\pwork\pwork\laughlinr1\0215213\0672898-Stage Construction.dgn	PLOT SCALE = 80.0000' / in.	DRAWN -	REVISED -					745	107B-1	ADAMS	86	22
PLOT DATE = Oct-14-2010 09:42:40AM	DATE -	CHECKED -	REVISED -		CONTRACT NO. 72B98			ILLINOIS FED. AID PROJECT				
		DATE -	REVISED -		SCALE:	SHEET NO. OF SHEETS	STA. TO STA.					