
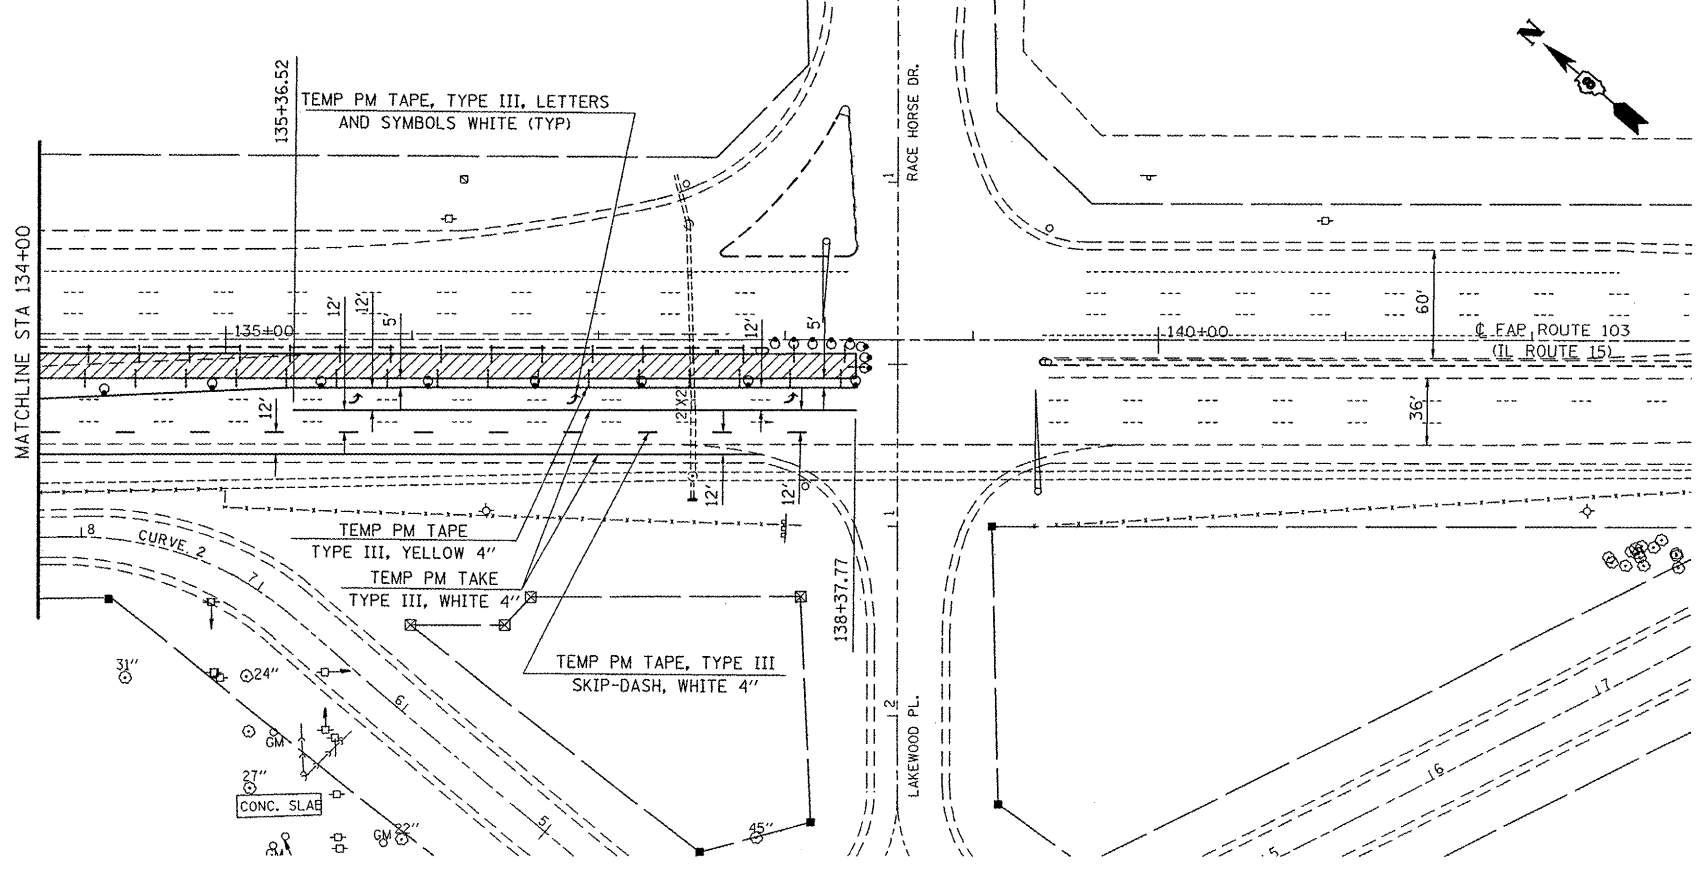


SEQUENCE OF CONSTRUCTION

PRIOR TO LAYOUT OF TRAFFIC CONTROL, CONTACT OPERATIONS FOR SIGNAL TIMING MODIFICATIONS.
 LAYOUT TRAFFIC CONTROL AS SHOWN IN THE PLANS.
 COVER ALL CONFLICTING PAVEMENT MARKINGS WITHIN THE MAINTENANCE OF TRAFFIC WITH PAVEMENT MARKING TYPE, TYPE III, BLACK, 6".
 REMOVE AND REPLACE LEFT TURN LANE AS SHOWN ON THE PLANS.
 PRIOR TO REMOVING TRAFFIC CONTROL, CONTACT OPERATIONS FOR SIGNAL TIMING MODIFICATIONS.
 REMOVE TRAFFIC CONTROL.
 REMOVE TAPE COVERING THE EXISTING PAVEMENT MARKING.
 FOR DETAILS NOT SHOWN ON THE TRAFFIC CONTROL SHEET SEE STANDARD 701401. STANDARD 701400, REFERENCED BY STANDARD 701401, WILL NOT BE UTILIZED WITH THIS PROJECT.



TEMPORARY PAVEMENT MARKING SCHEDULE						
LOCATION		TEMPORARY PAVEMENT MARKING TAPE, TYPE III YELLOW, 4"	TEMPORARY PAVEMENT MARKING TAPE, TYPE III WHITE, 4"	TEMPORARY PAVEMENT MARKING TAPE, TYPE III, SKIP-DASH WHITE, 4"	TEMPORARY PAVEMENT MARKING TAPE, TYPE III LETTERS AND SYMBOLS SQ FT	
STATION	TO	STATION	FOOT	FOOT	FOOT	
123+71.05	TO	129+01.69	531			
129+01.69	TO	132+59.64	358			
129+17.84	TO	132+59.64		342	86	
132+59.64	TO	135+36.52	278			
132+59.64	TO	134+12.46		153		15.6
135+36.52	TO	138+37.77	302	302	145	
135+66.55						15.6
136+83.04						15.6
137+99.48						15.6
SUB-TOTAL			1469	797	231	
TOTALS				2497		46.8

QUANTITIES INCLUDED IN THE COST OF STANDARD 701401 (SPECIAL)

