

WESTBOUND SHOWN - EASTBOUND SIMILAR STA 544+47 TO STA 700+00

MAINTENANCE OF TRAFFIC GENERAL NOTES:

- 1. REMOVAL OF EXISTING PAVEMENT MARKING, WHEN REQUIRED, SHALL BE PAID FOR AS "PAVEMENT MARKING REMOVAL".
- 2. EXISTING PAVEMENT MARKINGS REMOVED DURING MILLING OPERATIONS WILL NOT BE PAID FOR SEPARATELY.
- 3. PRESTAGE WORK WILL BE PERFORMED UNDER TEMPORARY NIGHTTIME LANE CLOSURES UTILIZING IDOT HIGHWAY STANDARD 701400-05 AND 701401-06 FOR SINGLE LANE CLOSURES FOLLOWING ALL APPLICABLE CONTRACT REQUIREMENTS. THESE CLOSURES WILL BE INCLUDED IN THE LUMP SUM ITEM "TRAFFIC CONTROL AND PROTECTION, (EXPRESSWAYS)"
- 4. SHOULDER RUMBLE STRIPS SHALL BE INSTALLED AFTER THE PERMANENT MAINTENANCE OF TRAFFIC HAS BEEN REMOVED. THIS WORK SHALL BE UNDER A SHOULDER CLOSURE ACCORDING TO IDOT DISTRICT 1 STANDARD DRAWING TC-17.
- 5. SURFACE COURSE SHALL ONLY BE APPLIED WHEN CONTRACTOR IS ABLE TO PROPERLY INSTALL PERMANENT INLAID STRIPING. COVERING OF PERMANENT STRIPING WITH BLACK TAPE OR SUBSEQUENT GROOVING OF THE PAVEMENT WILL NOT BE ALLOWED.
- 6. DURING INTERMITTENT STAGE, ALL SIGNS SHALL BE MODIFIED TO PROPERLY REFLECT TRAFFIC CONFIGURATION.
- 7. CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING AND PLACING WIDTH RESTRICTION SIGNING ACCORDING TO 100T'S "ROAD CONSTRUCTION REPORTING AND SIGNING FOR VEHICLE WIDTH RESTRICTIONS" POLICY. THIS WORK WILL BE INCLUDED IN "TRAFFIC CONTROL AND PROTECTION (EXPRESSWAYS)" (X7011015).

MAINTENANCE OF TRAFFIC STAGING DESCRIPTION:

PRESTAGE -


1. GRIND AND RESURFACE INSIDE SHOULDER TO REMOVE RUMBLE STRIP. STA 526+00 TO 700+00


STAGE 1 -

- 1. GRIND, PATCH, AND RESURFACE OUTSIDE LANE AND SHOULDER. SEE ROADWAY PLANS FOR SPECIFIC LOCATIONS.
- 2. COMPLETE ALL STAGE 1 BRIDGE WORK. SEE STRUCTURAL PLANS FOR PROPOSED BRIDGE WORK.

STAGE 2 -

- 1. GRIND, PATCH, AND RESURFACE INSIDE LANE AND SHOULDER. SEE ROADWAY PLANS FOR SPECIFIC
- 2. COMPLETE ALL STAGE 2 BRIDGE WORK. SEE STRUCTURAL PLANS FOR PROPOSED BRIDGE WORK.

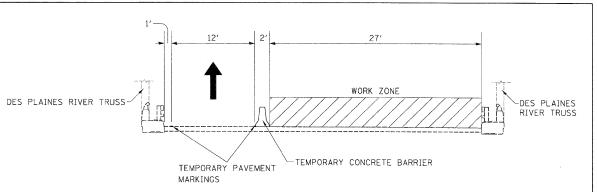


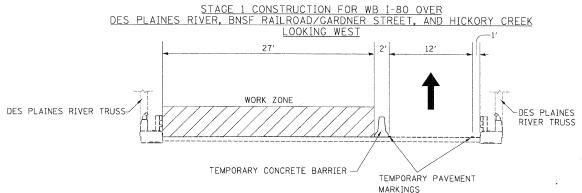

STAGE 2 CONSTRUCTION FOR WB I-80 OVER DES PLAINES RIVER, BNSF RAILROAD/GARDNER STREET, AND HICKORY CREEK LOOKING WEST 12' 33 AUX. LANE WORK ZONE TEMPORARY CONCRETE BARRIER TEMPORARY PAVEMENT

STAGE 1 CONSTRUCTION FOR WB I-80 OVER CHICAGO STREET LOOKING WEST

MARKINGS

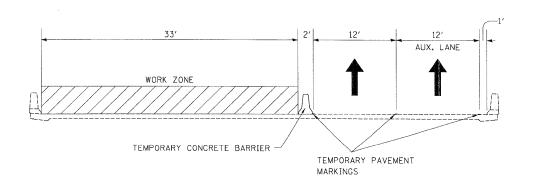

STAGE 2 CONSTRUCTION FOR WB I-80 OVER CHICAGO STREET

DESIGNED - JK REVISED REVISED DRAWN PLOT SCALE = \$SCALE\$ CHECKED - RR REVISED PLOT DATE = 1/20/2011 DATE 01/21/2011 REVISED



STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

MOT TYPICAL SECTIONS							SEC	TION	COUNTY	TOTAL	SHEE NO.
1-80 MAINLINE						80	99(2&3)RS-3		WILL	200	33
									CONTRACT	NO.	60M6
SCALE: N/A	SHEET NO. 1	OF 1	SHEETS	STA.	TO STA.	FED.	ROAD DIST. NO.	ILLINOIS FED.	AID PROJECT		