


CENTER LANE CLOSURE TYPE I CHECK BARRICADES DRUMS AT 50' (15 m) CENTERS AT 100' (30 m) CENTERS ΝΪΝ (m (90 ARROW BOARD DISPLAYING-DOUBLE ARROW PATTERN CENTER LANE CLOSE W9-3-48 * ₩9-3a-48 SIGNING & BARRICADING ACCORDING TO FREEWAY STANDARD FOR A ONE LANE CLOSURE INSTALLATION SEQUENCE 1. CLOSE LANES 1&2 ACTIVE NOTES WORK AREA 1. DRUMS WITH STEADY BURN LIGHTS SHALL BE USED AT 50' (15 m) CENTERS ON ALL TAPERS AND TANGENTS IN 2. ERECT INSIDE LANE 2 TAPER ADVANCE OF WORK AREA. 2. CLOSURE SHALL BE USED ONLY FOR OPERATIONS LASTING 72 HOURS OR LESS. 3. OPEN LANE 2 BY RELOCATING FIRST TAPER 3. CENTER LANE CLOSURE CONFIGURATION NON-ACTIVE IS NOT TO BE USED WITH WORKERS WORK AREA PRESENT. 4. REMOVE CLOSURE IN REVERSE ORDER

SHOULDER LANE

NOTE: CLOSURE SHALL BE USED ONLY FOR OPERATIONS LASTING 72 HOURS OR LESS.

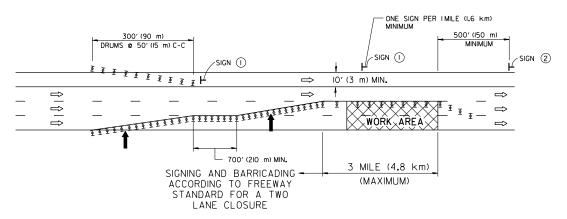

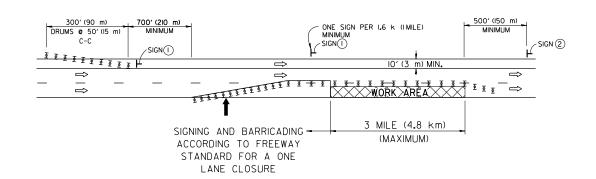

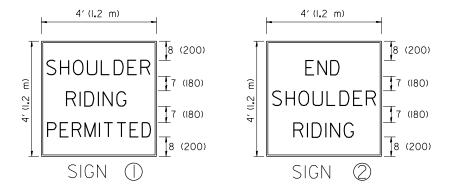

6 (150) SERIES "C" LEGEND BLACK LEGEND WHITE REFLECT. BACKGROUND 1(25) BORDER

SYMBOLS

DIRECTION OF TRAFFIC

■ ARROWBOARD

ACTIVE WORK AREA

- ► SIGN ON PORTABLE OR PERMANENT SUPPORT *
- TYPE II BARRICADE, OR DRUM WITH MONO-DIRECTIONAL STEADY BURN LIGHT

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
UNLESS OTHERWISE SHOWN

* ALL SIGNS SHALL BE MOUNTED AT A MINIMUM HEIGHT OF 5'(1.5 m).

FILE NAME =	USER NAME = lloydjm	DESIGNED	-	REVISED	-т. RJAMJRIA (ОНЕНО 312-07-00
\pw_work\pwidot\lloydjm\d0298297\DistStd.dgn		DRAWN	-	REVISED	- K. SENGB. 01-07 01-12-12
	PLOT SCALE = 100.0000 '/ 10.	CHECKED	-	REVISED	- S.P.B. 12-09
į	PLOT DATE = 4/4/2012	DATE	-	REVISED	=

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

	TRAFFIC CONTROL DETAILS FOR FREEWAY CENTER LANE CLOSURE SHOULDER LANE				SEC	
					2012-00	
	CENTER LANE GEOSORE		TC-25			
	SCALE: NONE SHEET NO. B OFF IS SCHEEETISS	STA.	TO STA.	FED. R	FED. ROAD DIST. NO. 1	